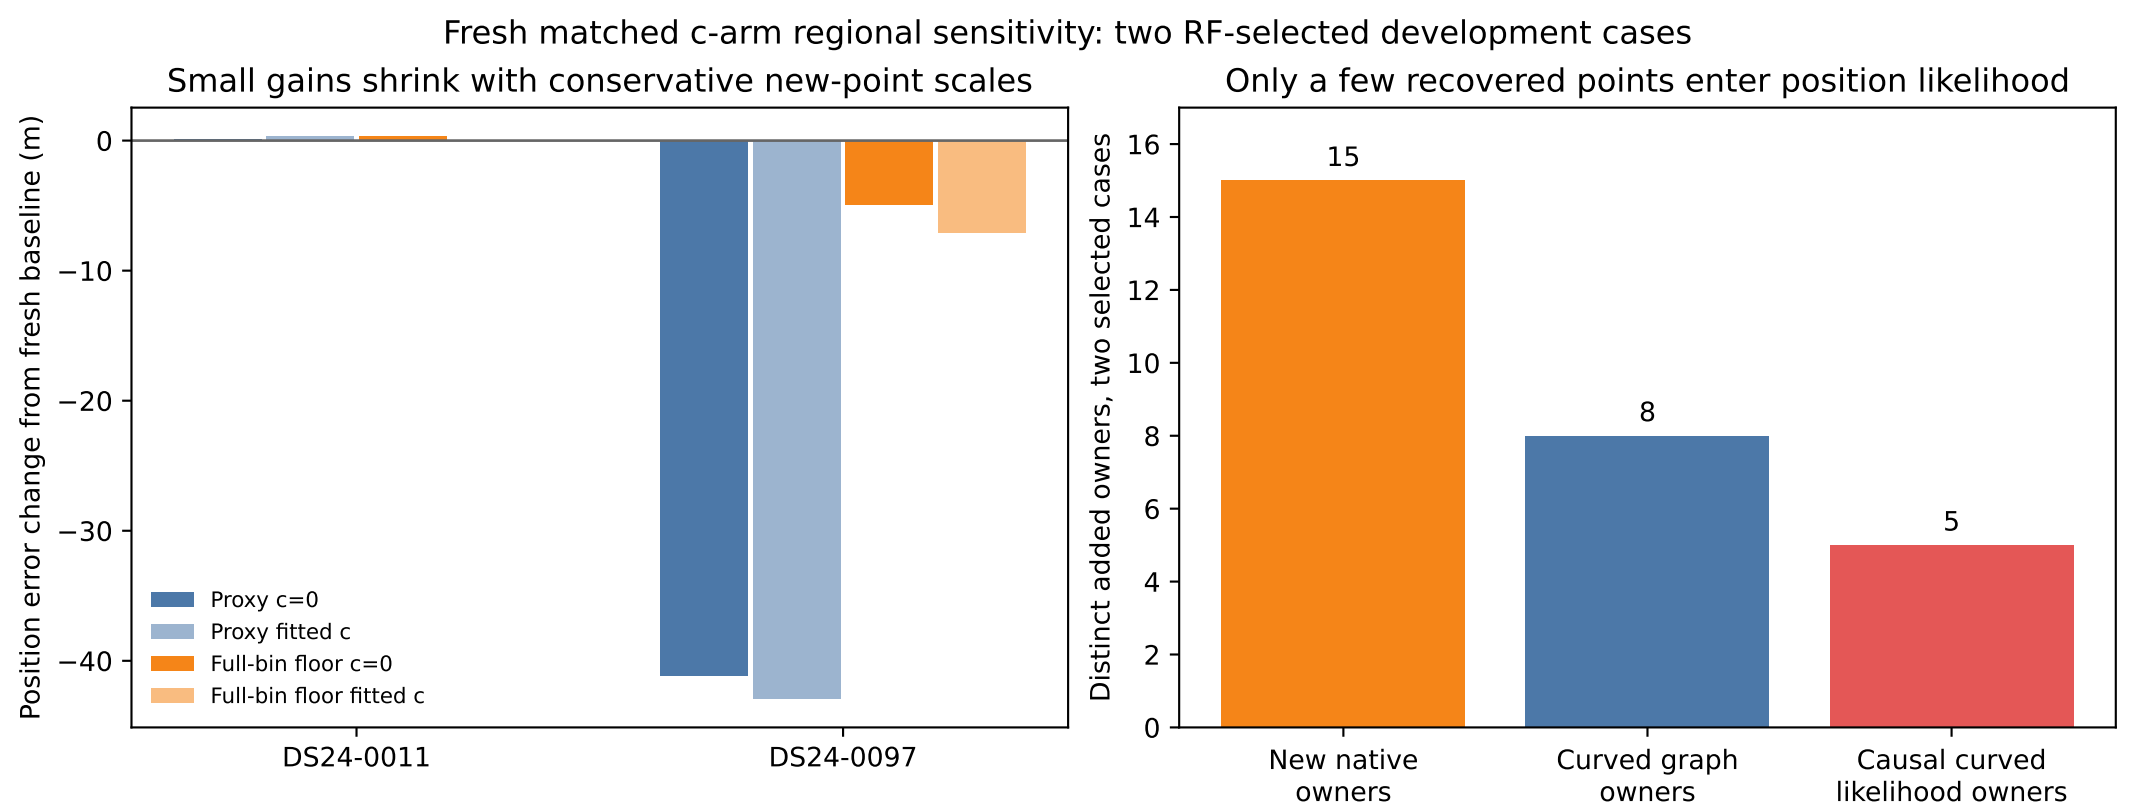
Fresh matched c-arm regional sensitivity: two RF-selected development cases
Small gains shrink with conservative new-point scales
Position error change from fresh baseline (m)
0
−10
−20
−30
−40
Proxy c=0
Proxy fitted c
Full-bin floor c=0
Full-bin floor fitted c
DS24-0011
DS24-0097
Only a few recovered points enter position likelihood
Distinct added owners, two selected cases
16
14
12
10
8
6
4
2
0
15
8
5
New native owners
Curved graph owners
Causal curved likelihood owners
All six jobs completed; GPS used only after terminal/input/read audit seals.
Full-bin floor is an engineering sensitivity, not calibrated independent frequency uncertainty or promotion.