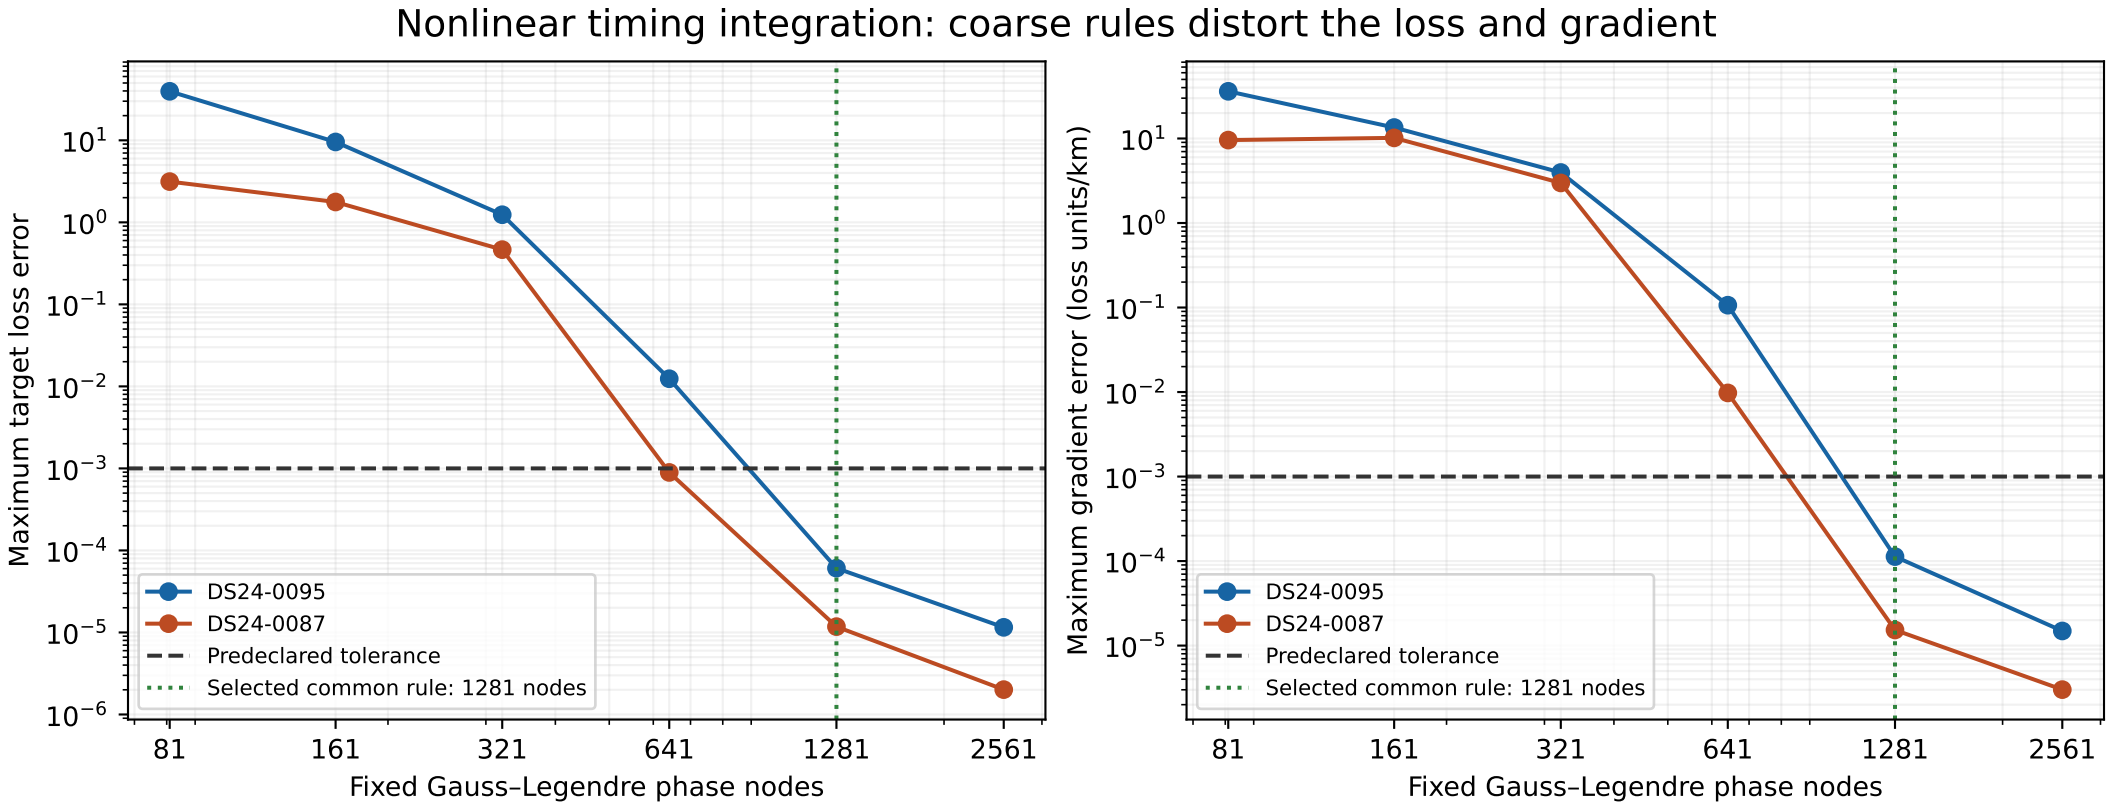
Nonlinear timing integration: coarse rules distort the loss and gradient
Maximum target loss error
Maximum gradient error (loss units/km)
Fixed Gauss–Legendre phase nodes
Fixed Gauss–Legendre phase nodes
DS24-0095
DS24-0087
Predeclared tolerance
Selected common rule: 1281 nodes
DS24-0095
DS24-0087
Predeclared tolerance
Selected common rule: 1281 nodes
81
161
321
641
1281
2561
Independent adaptive reference; 160 fixed checks across both c settings, both covariance branches,
saved baseline/support/midpoint and regional start, with ±10 m axis offsets. No new position fits.