



SPOKE INPUT — 10.5-13.2 V at pod / no hot-plug / protected 12 V boundary

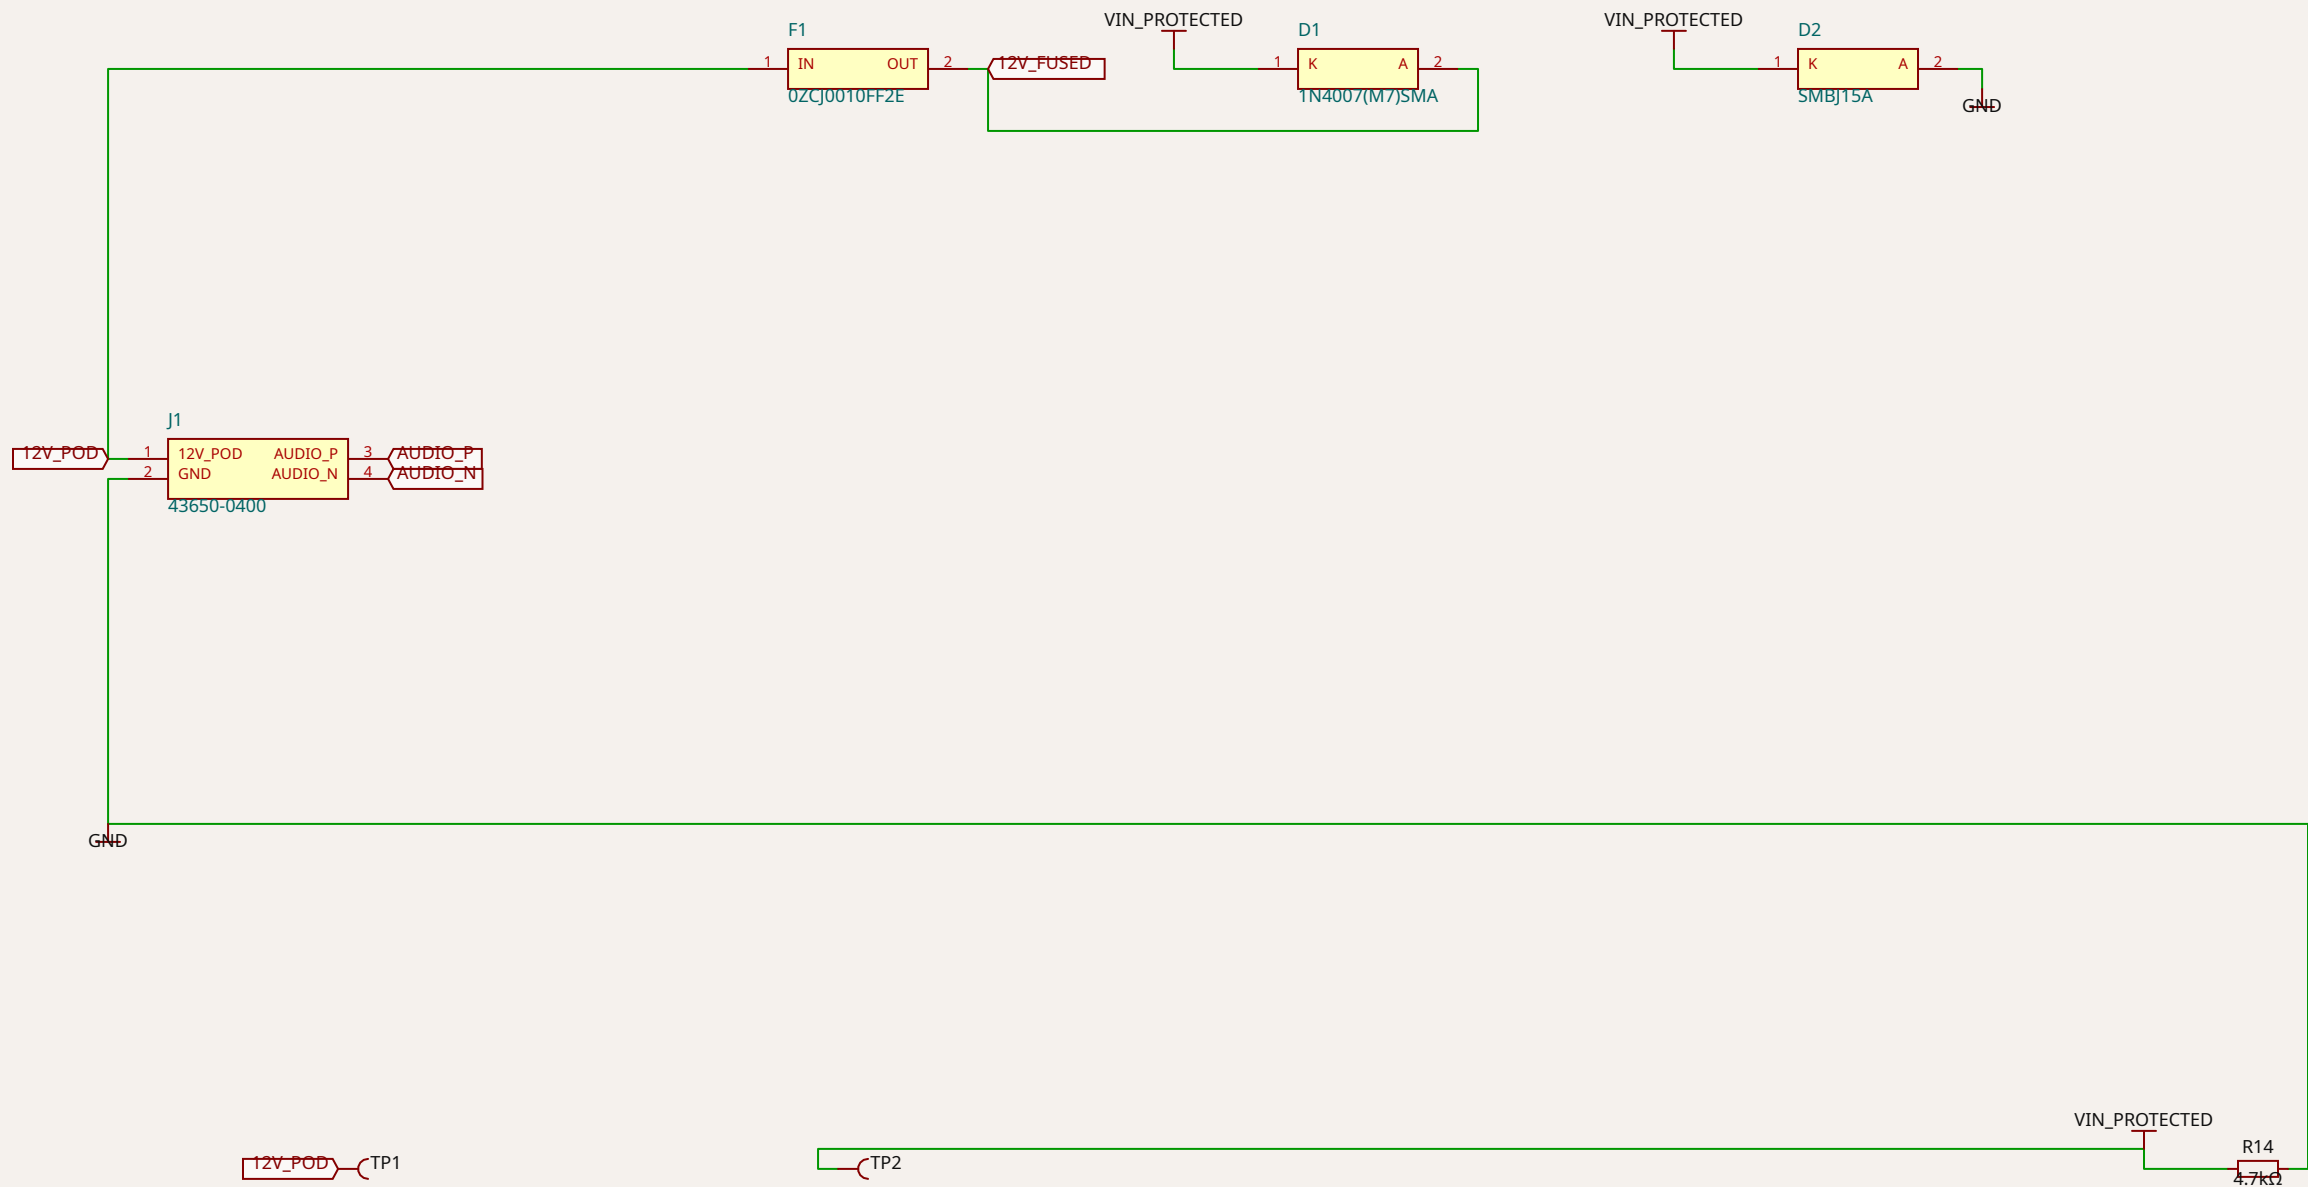

CROW MICROPHONE POD V3 - FIRST ARTICLE

QUIET 5 V — TPS7A4901 adjustable LDO / 10.1 uF connector-side capacitance


Page 2 of 4 • exact circuit.json SHA-256 a073f897ff4fa968... • 11 components • landscape page fit

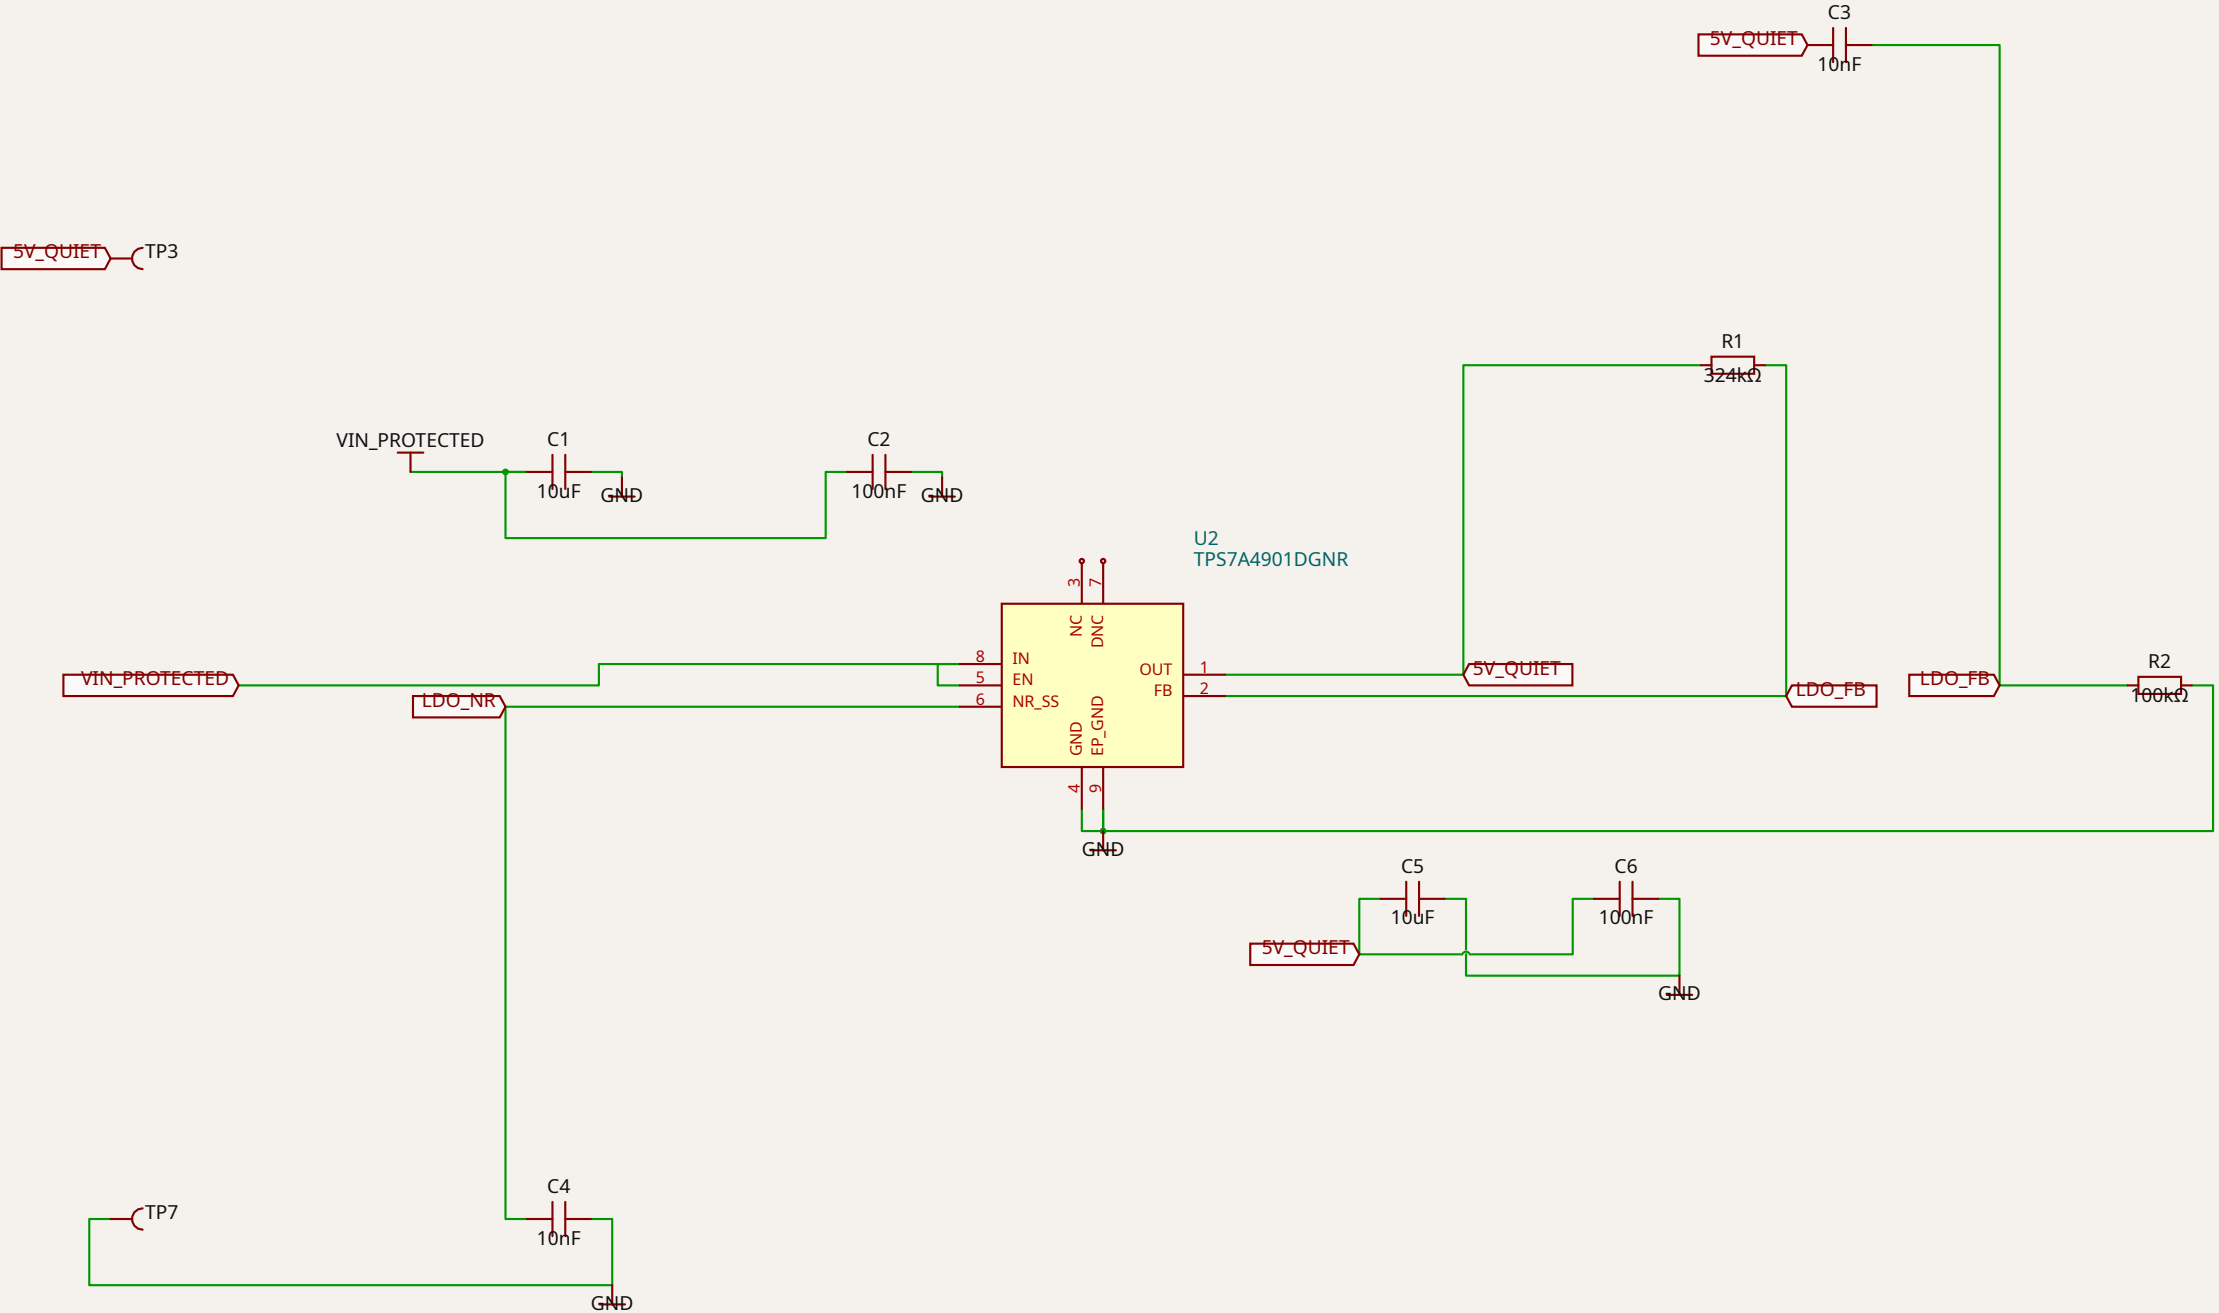

CROW MICROPHONE POD V3 - FIRST ARTICLE

ELECTRET FRONT END — hand-wired capsule / filtered bias / buffered half-rail

Page 3 of 4 • exact circuit.json SHA-256 a073f897ff4fa968... • 10 components • landscape page fit

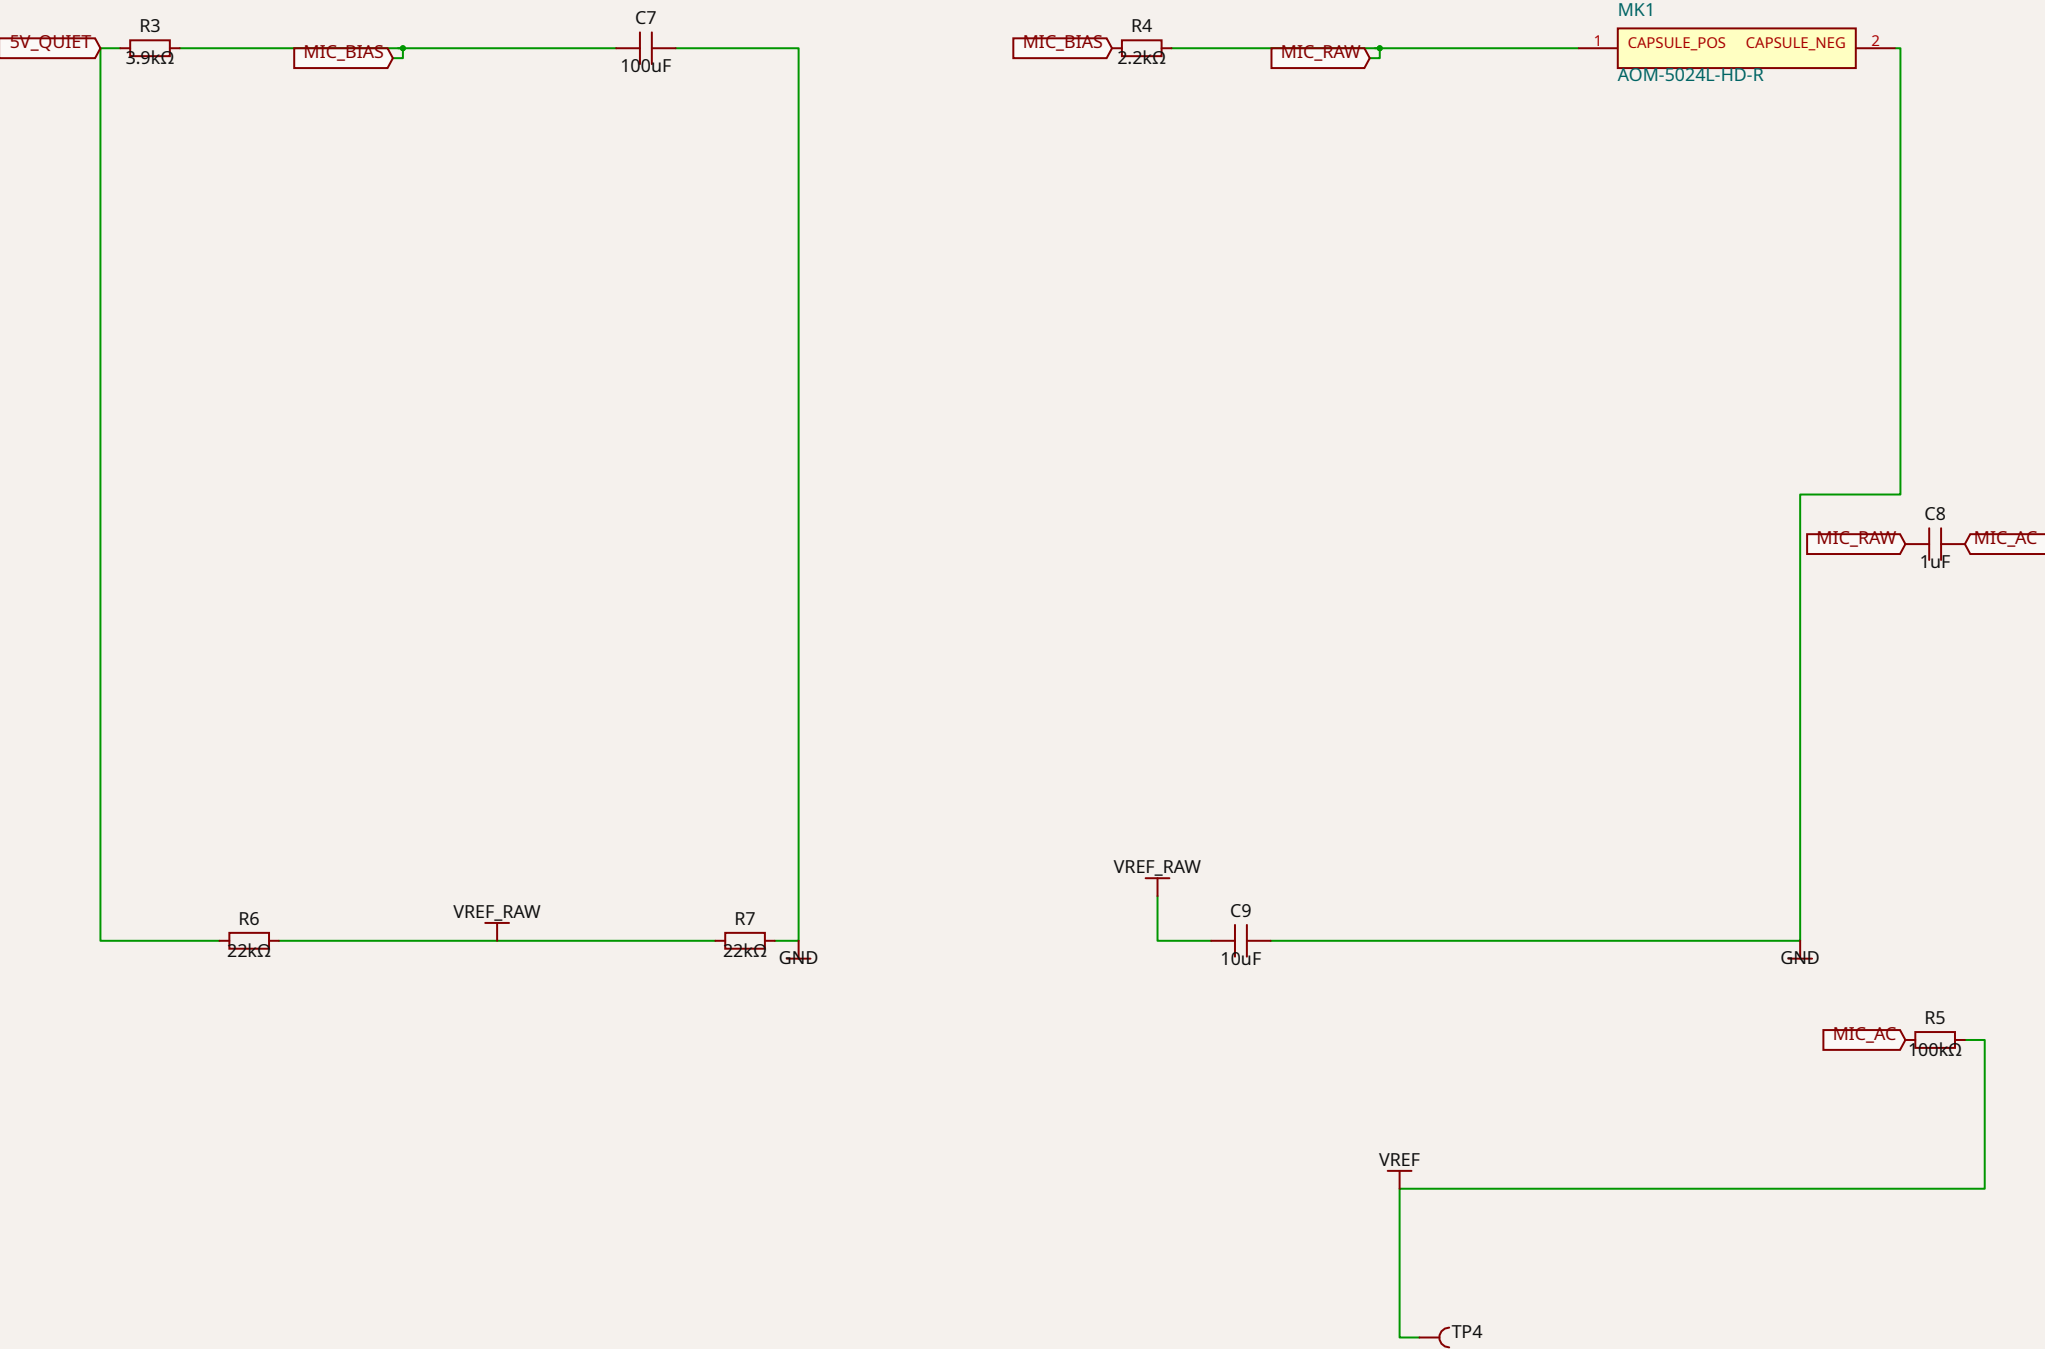

CROW MICROPHONE POD V3 - FIRST ARTICLE

ACTIVE BALANCED OUTPUT — gain 18/11 V/V differential / 100 ohm each leg / DC-coupled

