

CROW CARRIER — eight synchronous microphone channels / USB data / 12 V operating power

PROTOTYPE — NOT FOR FABRICATION. Outdoor protection and exact assembly qualification remain open.

12 V INPUT / REVERSE PROTECTION / 5 V CONVERSION

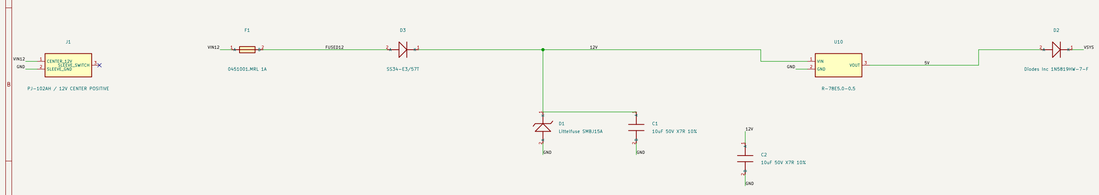


ADC 1: CHANNELS 1-4 / PCM1864 / common 3V3




U1 LOCAL DECOUPLING — separate capacitor positions at each supply pin




ADC 2: CHANNELS 5-8 / PCM1864 / common 3V3




U2 LOCAL DECOUPLING — separate capacitor positions at each supply pin

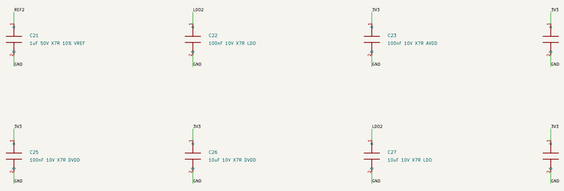


POD 1 — differential audio + power + active-low calibration command




POD 2 — differential audio + power + active-low calibration command




POD 3 — differential audio + power + active-low calibration command




POD 4 — differential audio + power + active-low calibration command




POD 5 — differential audio + power + active-low calibration command




POD 6 — differential audio + power + active-low calibration command



POD 7 — differential audio + power + active-low calibration command




POD 8 — differential audio + power + active-low calibration command





U3 ASSEMBLY: DEPOPULATE ON-MODULE D1 only: retain R10/R1 VBUS sense. USB DATA ONLY.



SHARED 12.288 MHz MCLK

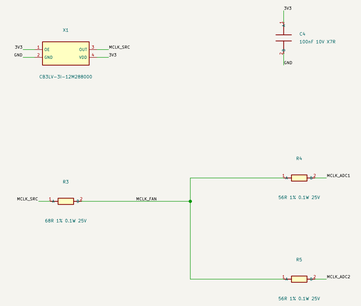

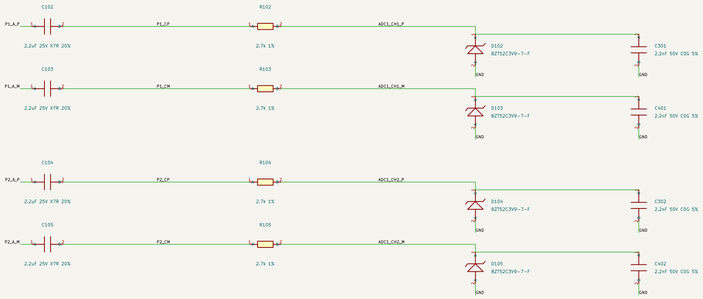



Sheet: /	
File: crow-carrier.kicad_sch	
Title: crow-carrier — PROTOTYPE / NOT FOR FABRICATION	
Size: A1	Date:
KiCad E.D.A. 10.0.4	**Rev:** Id: 1/1