

CROW POD — one differential microphone / USB-commanded calibration buzzer

PROTOTYPE — NOT FOR FABRICATION. CAT5/6 is a dedicated harness, not Ethernet or PoE.


LOCAL POWER — reverse-safe LDO; R14 must remain fitted to sink returned cable charge

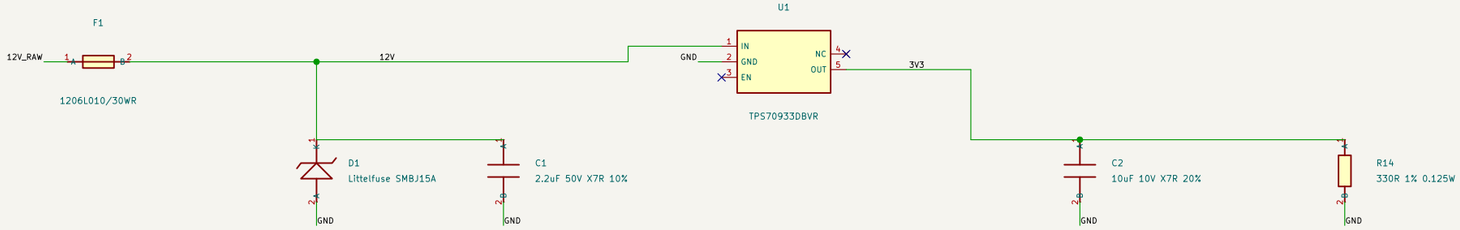


MICROPHONE / BIAS / PREAMPLIFIER

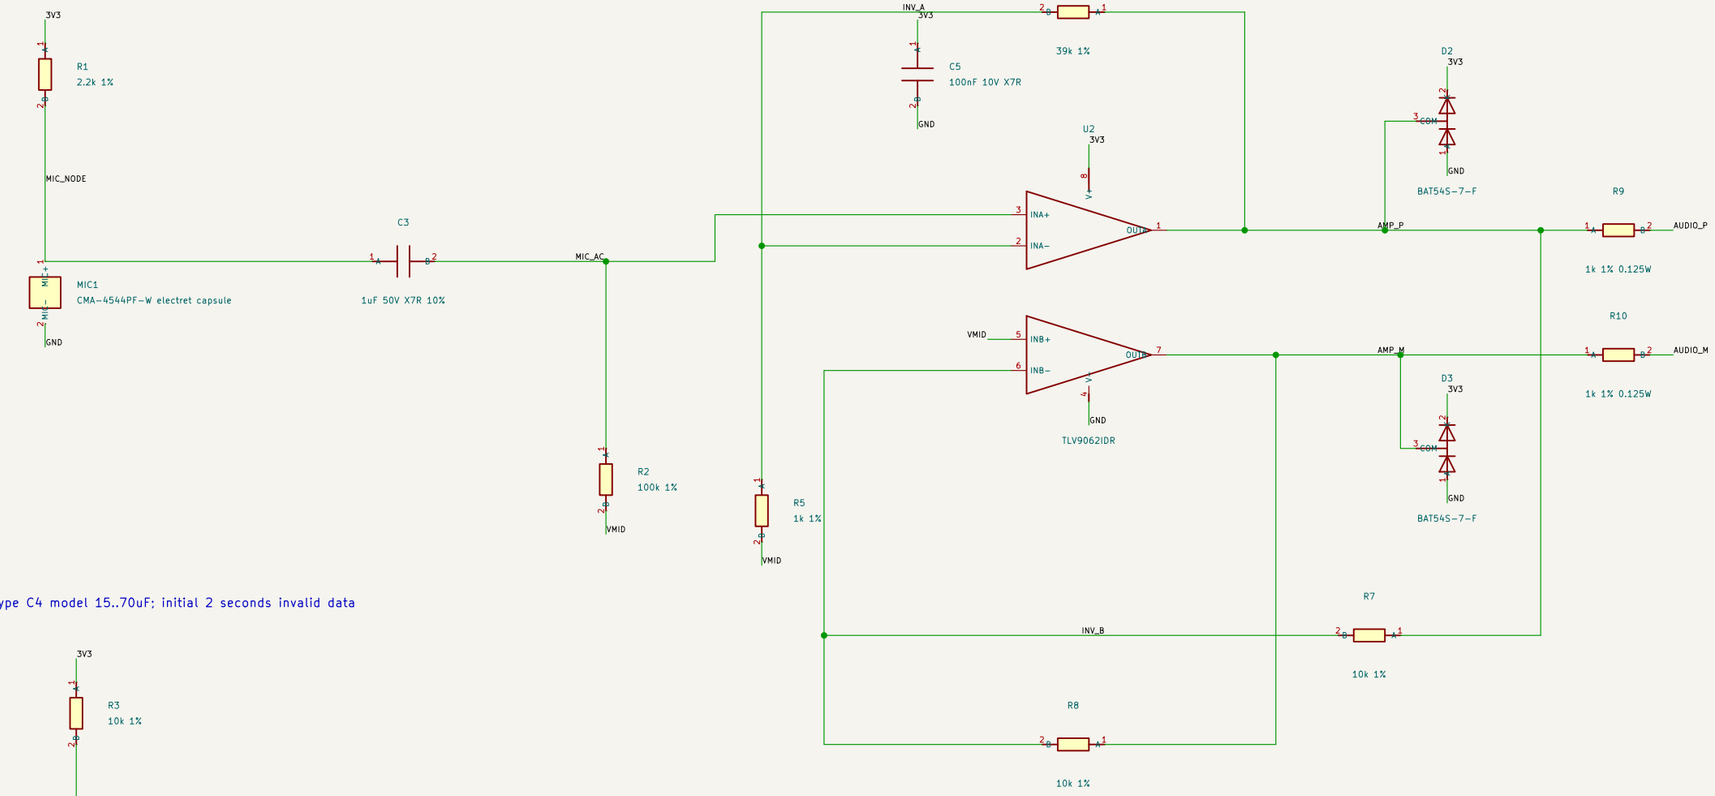


1k OUTPUT ISOLATION + RAIL STEERING






VMID — Prototype C4 model 15..70uF; initial 2 seconds invalid data

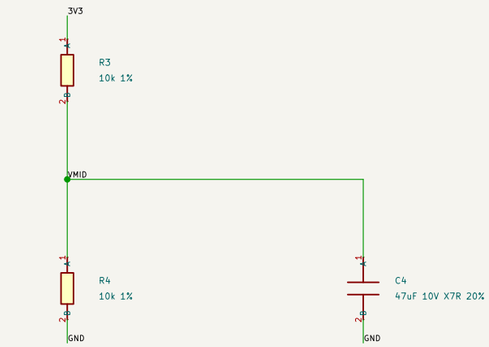

CALIBRATION BUZZER — active-low command, default OFF

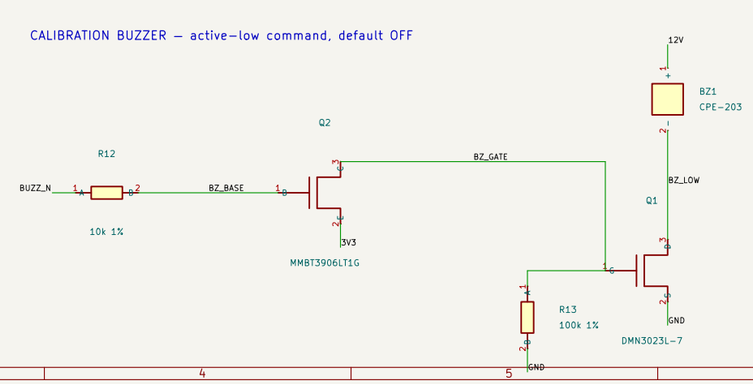



Sheet: /
File: crow-pod.kicad_sch

Title: crow-pod — PROTOTYPE / NOT FOR FABRICATION

Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 1/1