

CROW POD — one differential microphone / USB-commanded calibration buzzer

PROTOTYPE — NOT FOR FABRICATION. CAT5/6 is a dedicated harness, not Ethernet or PoE.


LOCAL POWER — reverse-safe LDO; R14 must remain fitted to sink returned cable charge

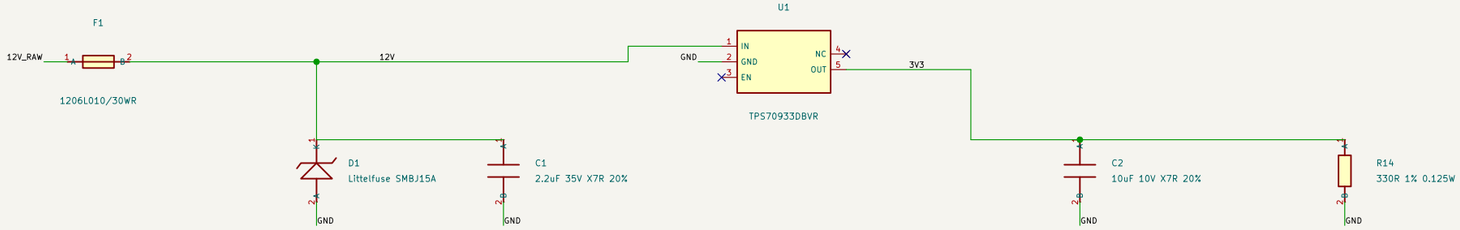



MICROPHONE / BIAS / PREAMPLIFIER

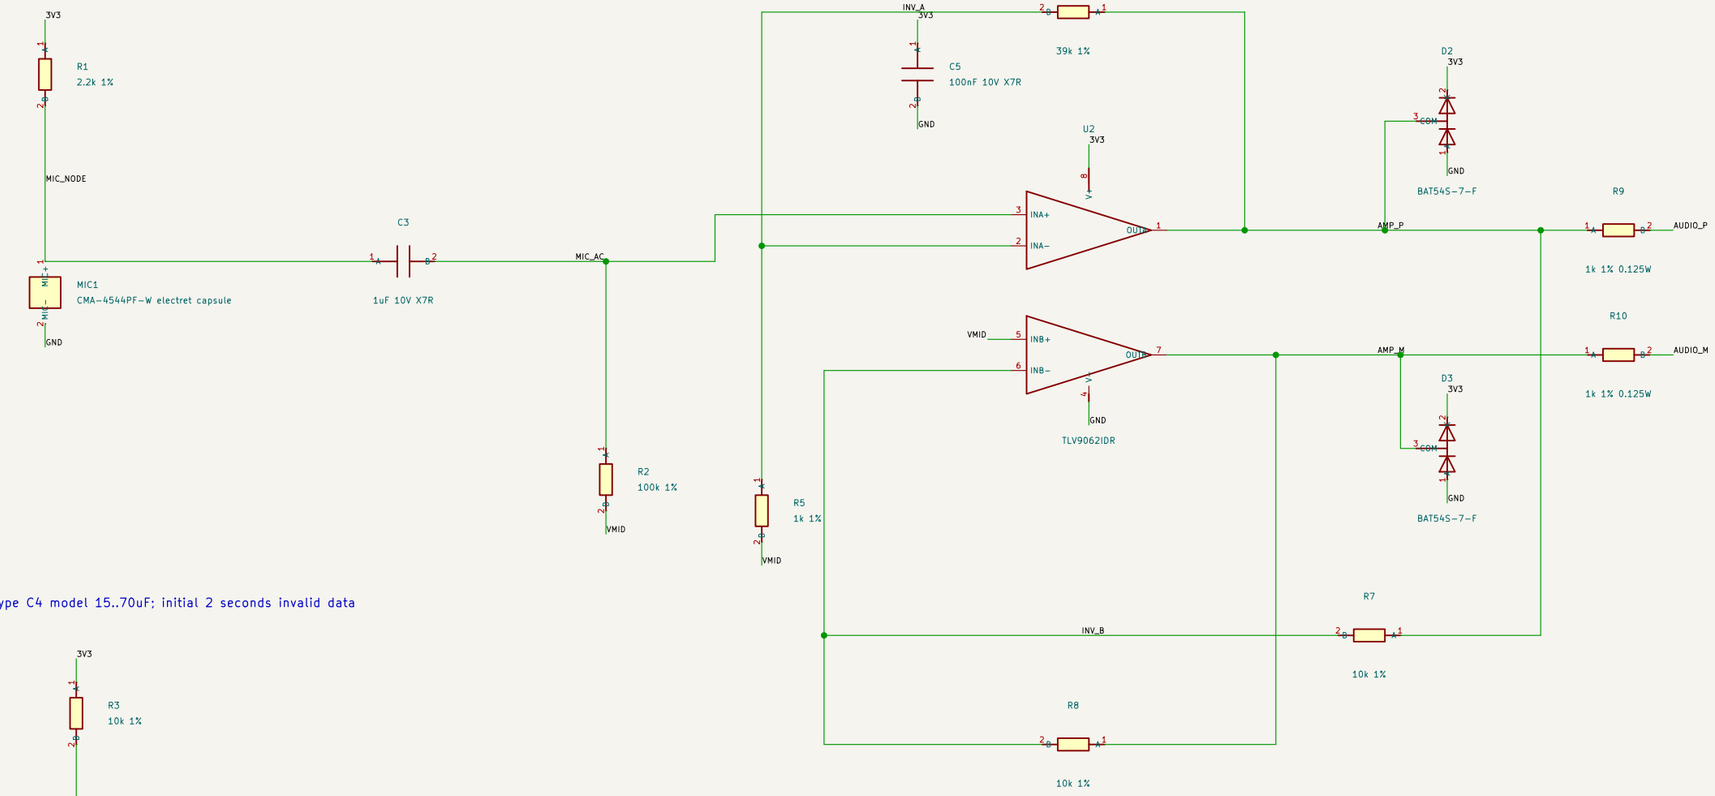

VMID — Prototype C4 model 15..70uF; initial 2 seconds invalid data

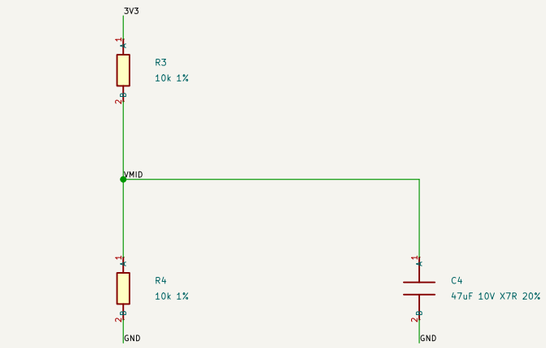

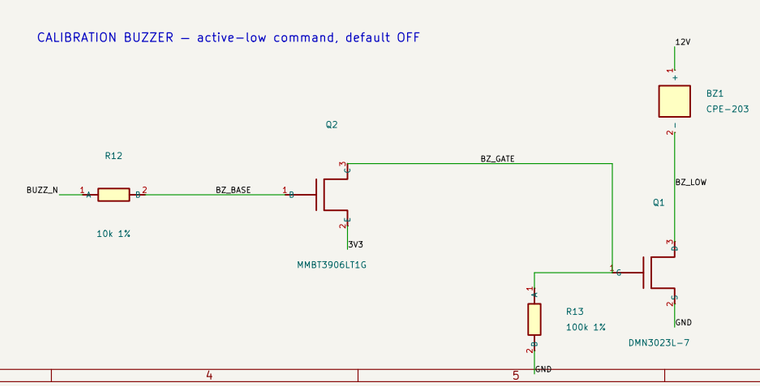





Sheet: /		
File: crow-pod.kicad_sch		
Title: crow-pod — PROTOTYPE / NOT FOR FABRICATION		
Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 1/1