



CROW MICROPHONE POD V3 - FIRST ARTICLE

SPOKE INPUT - 10.5-13.2 V at pod / no hot-plug / protected 12 V boundary

Page 1 of 4 • exact circuit.json SHA-256 05e07265ce6757d3... • 7 components • landscape page fit

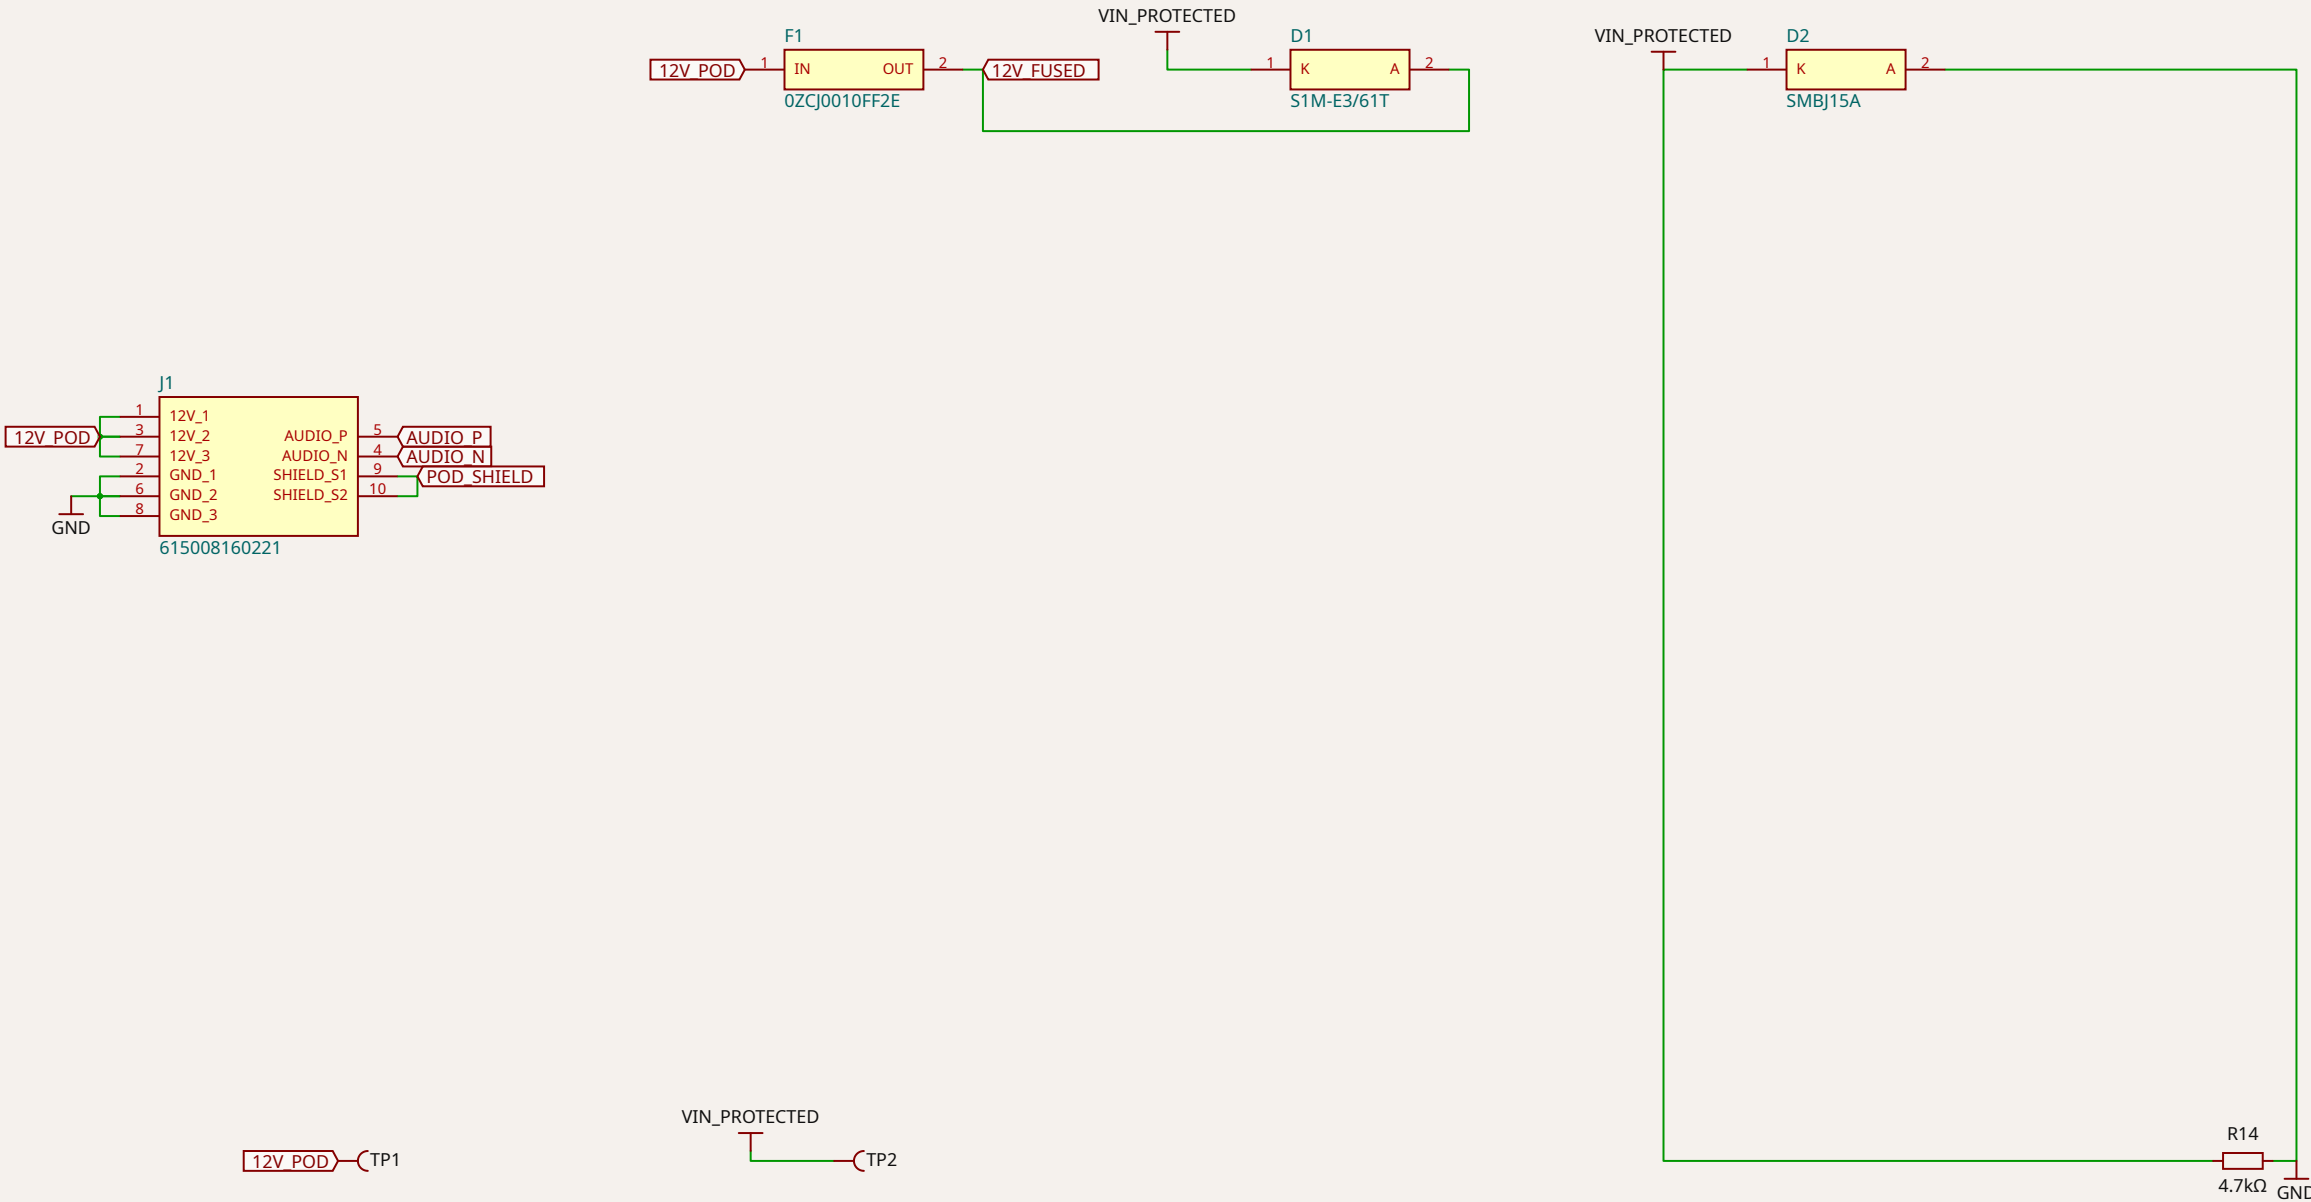


QUIET 5 V - TPS7A4901 adjustable LDO / 10.1 uF connector-side capacitance

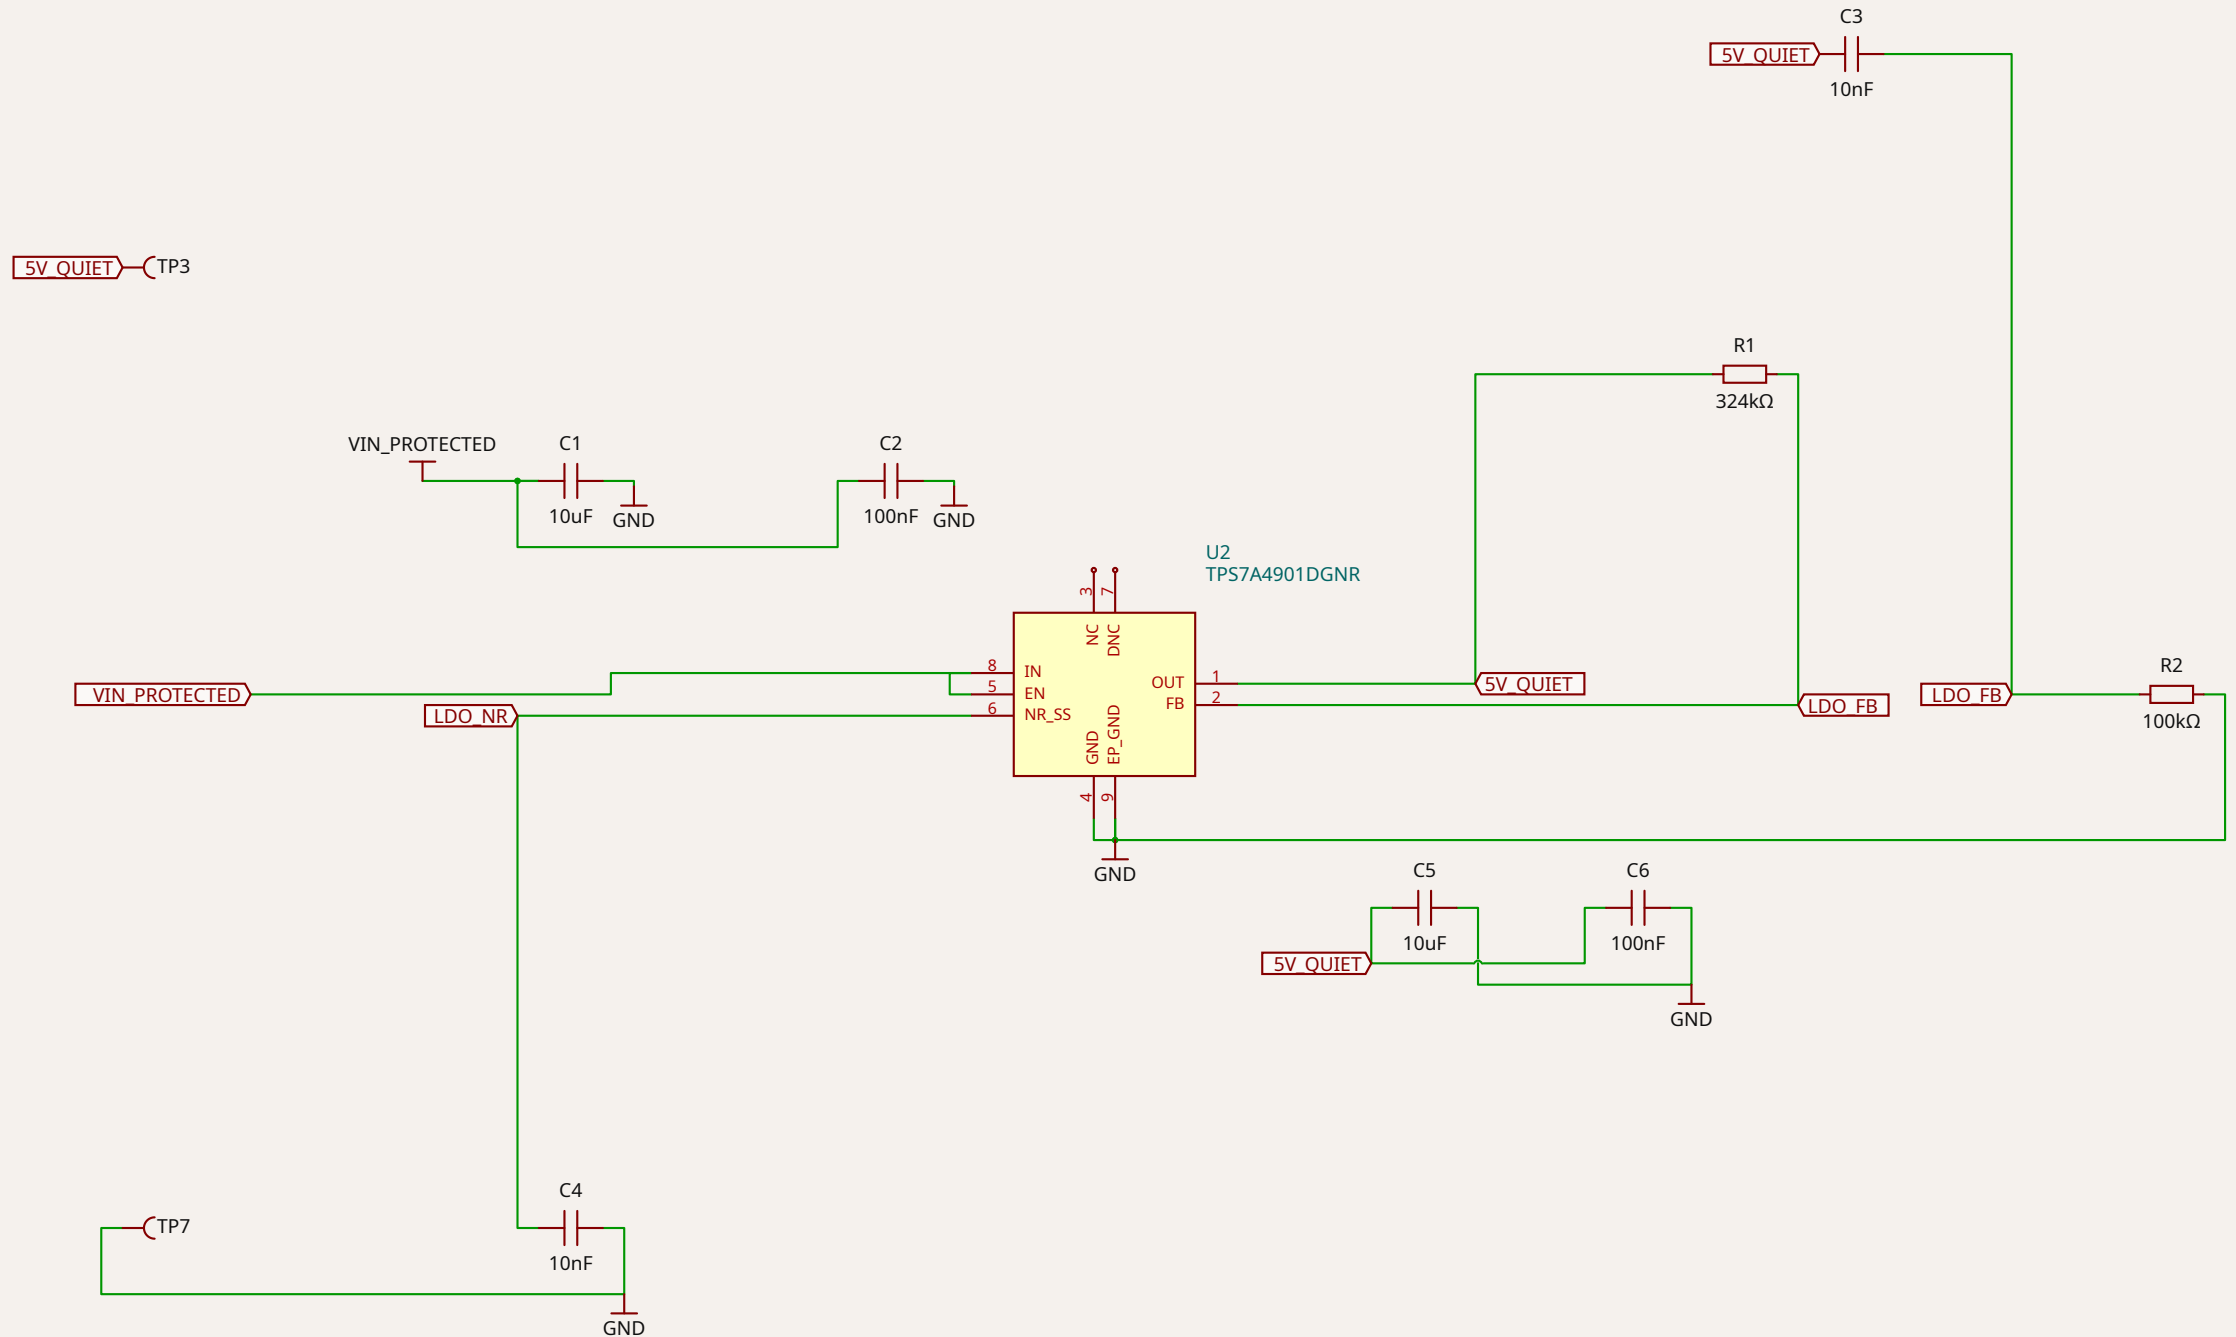

ELECTRET FRONT END - hand-wired capsule / filtered bias / buffered half-rail

The schematic diagram shows the MIC_BIAS circuit. It includes a 5V QUIET supply, a 3.9kΩ resistor (R3), a 100μF capacitor (C7), and two 22kΩ resistors (R6 and R7). The MIC_BIAS input is connected to the 5V QUIET supply through R3, to ground through R6, and to ground through R7. A VREF_RAW input is also connected to ground. A 100μF capacitor (C7) is connected between the MIC_BIAS input and ground.

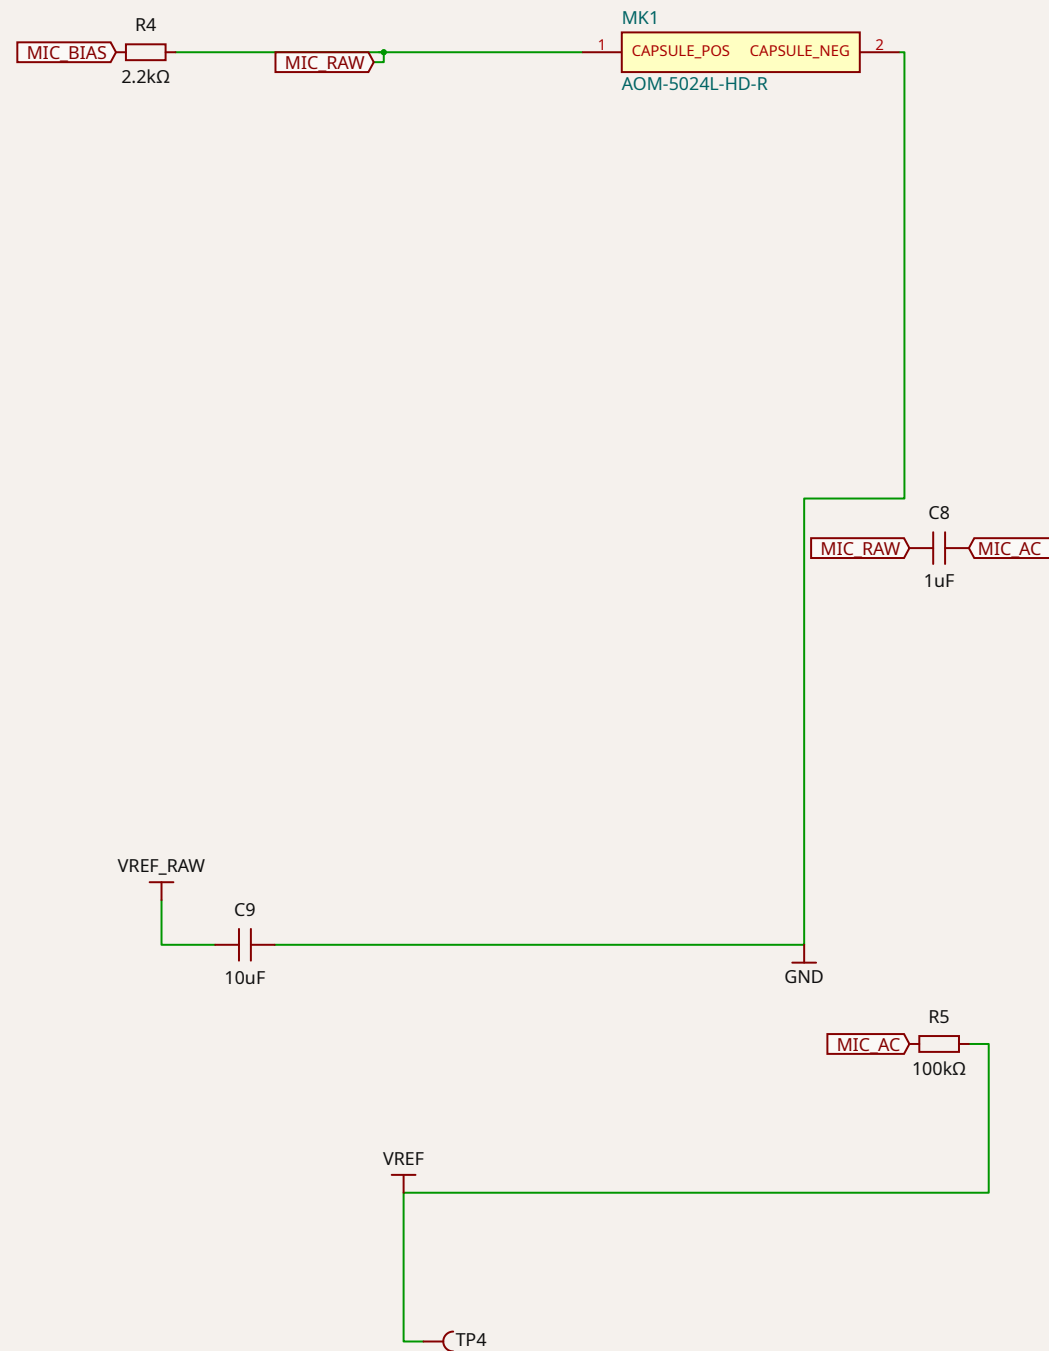

ACTIVE BALANCED OUTPUT - gain 18/11 V/V differential / 100 ohm each leg / DC-coupled

