


1210S106K4Z2A Datasheet



(1210 50V X7R 10uF ±10% AEC-Q200 FLEXITERM®)

Dimensions









	millimetres	inches
L	3.2 ± 0.2	0.126 ± 0.008
W	2.5 ± 0.2	0.098 ± 0.008
T max.	2.79	0.11
t	0.5 ± 0.25	0.02 ± 0.01

Basic Specifications

Item	Unit	Spec.	Conditions
Capacitance	uF	9 to 11	@ 1 kHz, 1 Vrms
DF	%	2.5 max.	@ 1 kHz, 1 Vrms
IR	MΩ	100 min.	@ 50 Vdc, t = 120 s
DWV	Vdc	125	@ I ≤ 50mA, t ≤ 5 s
Operating Temperature		-55°C to +125°C	
Dielectric		X7R	
AEC-Q200		Qualified	
RoHS Compliant		Yes	
Termination		FLEXITERM®	

Electrical Characteristics

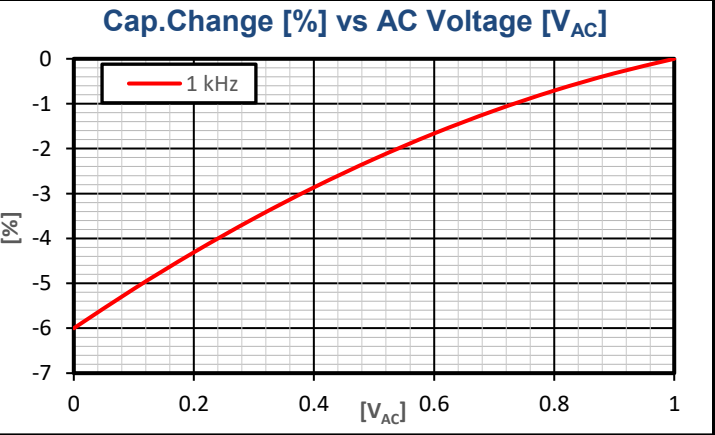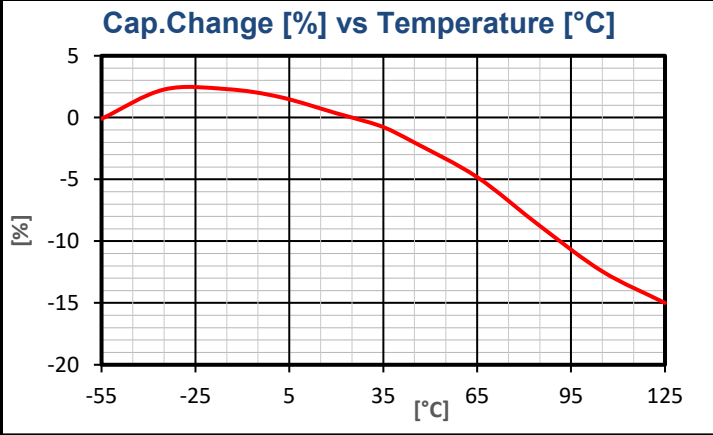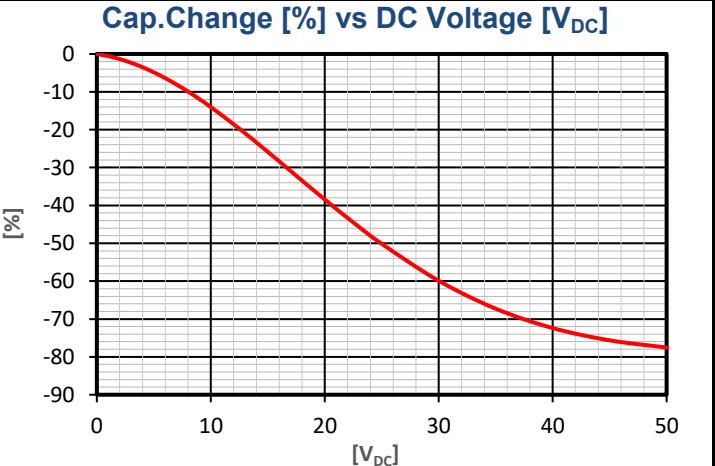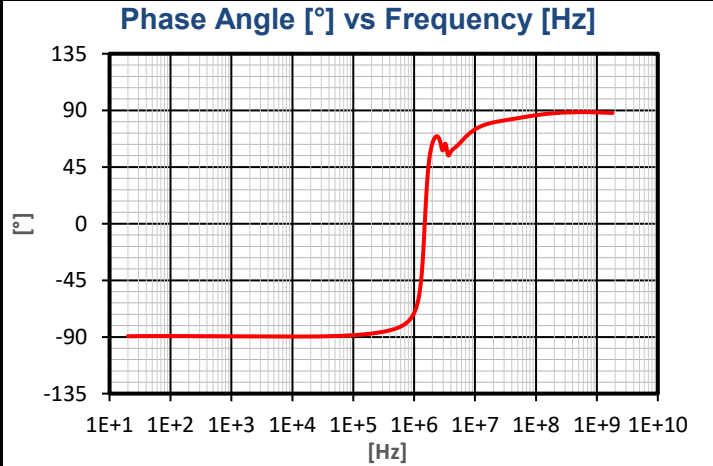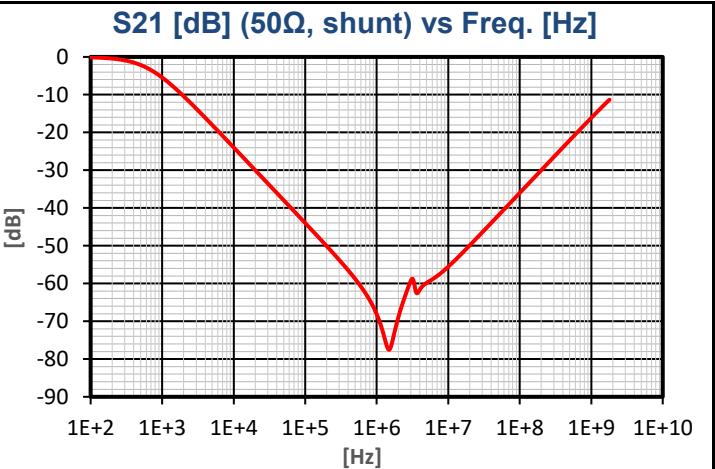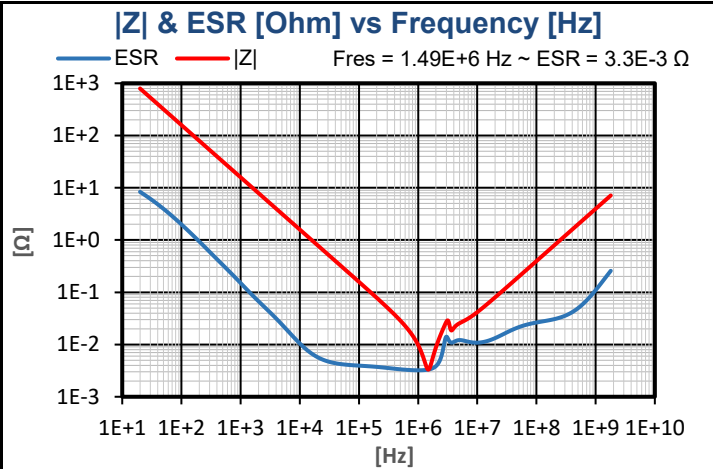


12105C106K4Z2A Datasheet



(1210 50V X7R 10uF ±10% AEC-Q200 FLEXITERM®)

Electrical Characteristics

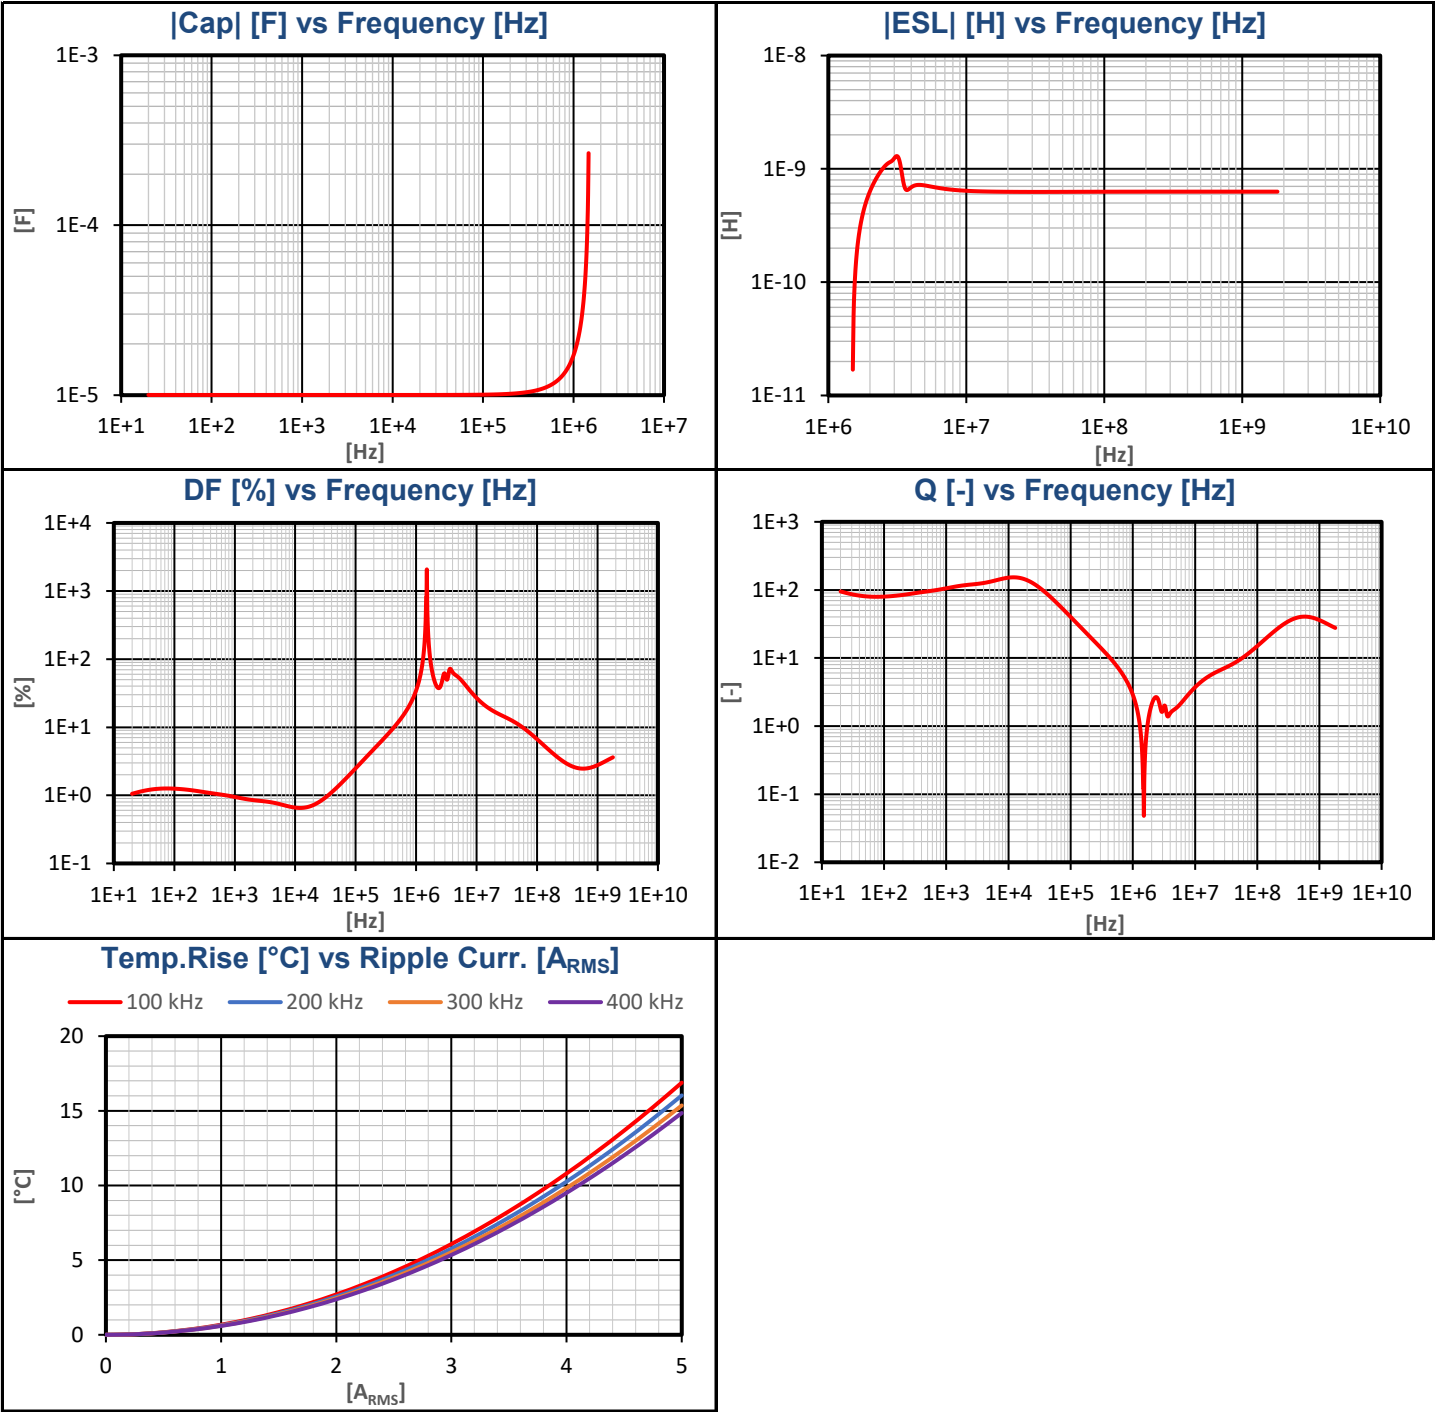

12105C106K4Z2A Datasheet



(1210 50V X7R 10uF ±10% AEC-Q200 FLEXITERM®)

How To Order

0805 Size (L" x W")	5 Voltage 4V = 4 6.3V = 6 10V = Z 16V = Y 25V = 3 50V = 5 100V = 1 200V = 2 500V = 7	C Dielectric X7R = C	103 Capacitance Code (In pF) 2 Sig. Digits + Number of Zeros	M Capacitance Tolerance J = ± 5%* K = ±10% M = ± 20% *≤1μF only, contact factory for additional values	A Failure Rate A = Not Applicable	T Terminations T = Plated Ni and Sn Z= FLEXITERM®** *Optional termination **See FLEXITERM® X7R section	2 Packaging 2 = 7" Reel 4 = 13" Reel Contact Factory For Multiples	A Special Code A = Std. Product
NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers. Contact factory for non-specified capacitance values.								
NOTICE: Specifications are subject to change without notice. All statements, information and data given herein are beleived to be accurate and reliable, but are presented without guarantee or responsibility of any kind, expressed or implied. Specifications are typical and may not apply to all applications.								