


Murata Global Part No.	Chip Size Code (mm/inch)	Temp. Chara.	Cap.Value	Cap.Tol	Rated Volt.	Durability (%Rated Volt.)
GRM21BR60J226ME39	2012M/0805	X5R	22 μ F	$\pm 20\%$	6.3Vdc	150%

1. Dimension

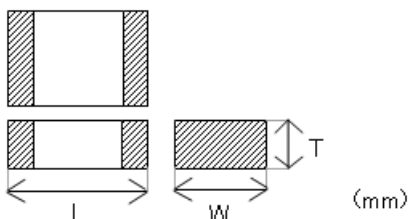


L	W	T
2 ± 0.15	1.25 ± 0.15	1.25 ± 0.15

2. Capacitance, D.F. and I.R.

	Specifications	Measuring condition
Capacitance	17.6 μ F to 26.4 μ F	120Hz / 0.5Vrms
D.F.	0.1(max.)	120Hz / 0.5Vrms
I.R.	2.27 Mohm(min.)	6.3V, 60s


3. Impedance/ESR-Frequency

Equipment: Impedance/Network Analyzer

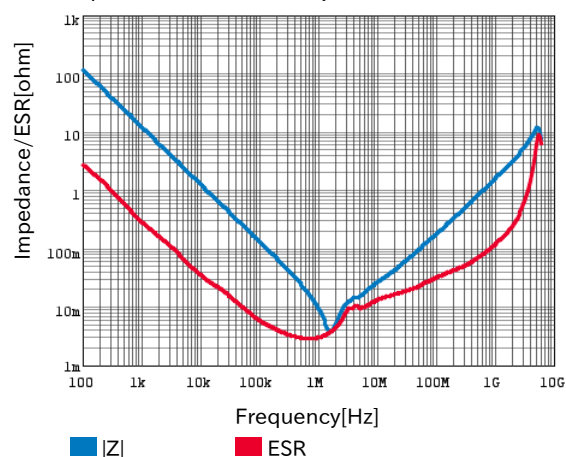


4. Capacitance-DC Bias Characteristics

120Hz / 0.5Vrms Equipment: LCR Meter

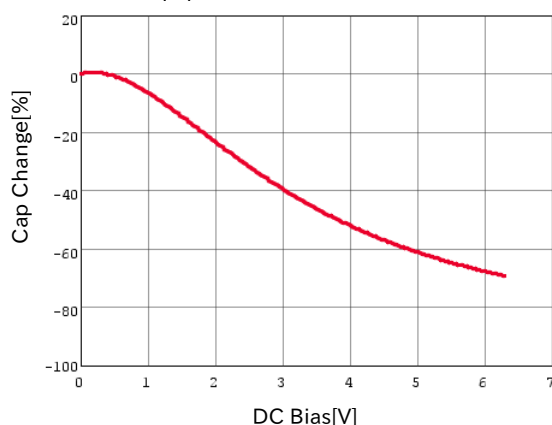


5. Capacitance-AC Voltage Characteristics

120Hz Equipment: LCR Meter

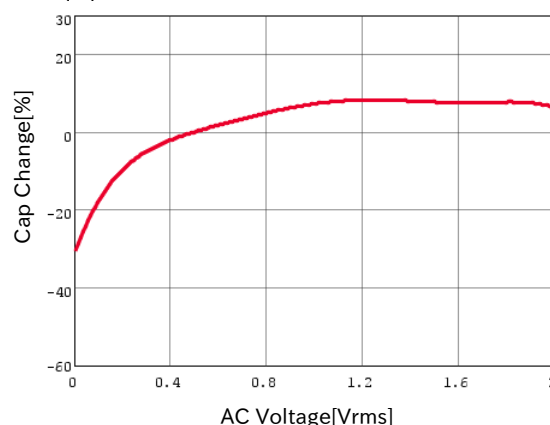

6. Capacitance-Temp. Characteristics

120Hz / 0.5Vrms Equipment: LCR Meter

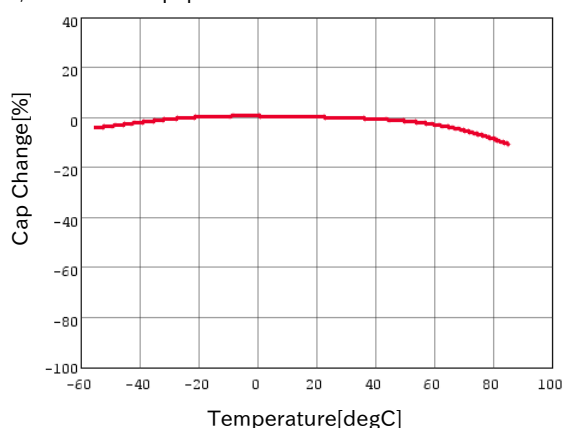

7. Temperature Rise-Ripple Current

Equipment: Temperature Rise - Ripple Current Measurement system

