




1. INPUT + PROTECTION (3S: 9–13V)

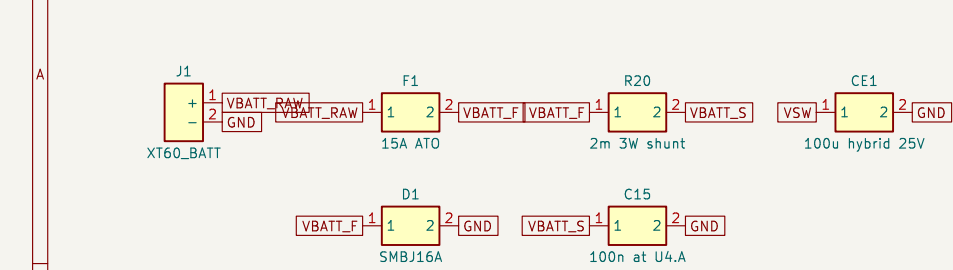


2. FRONT-END: LM74800-Q1 + 2x CSD18543Q3A b2b (rev-pol + on/off + OV; 2.87uA off)

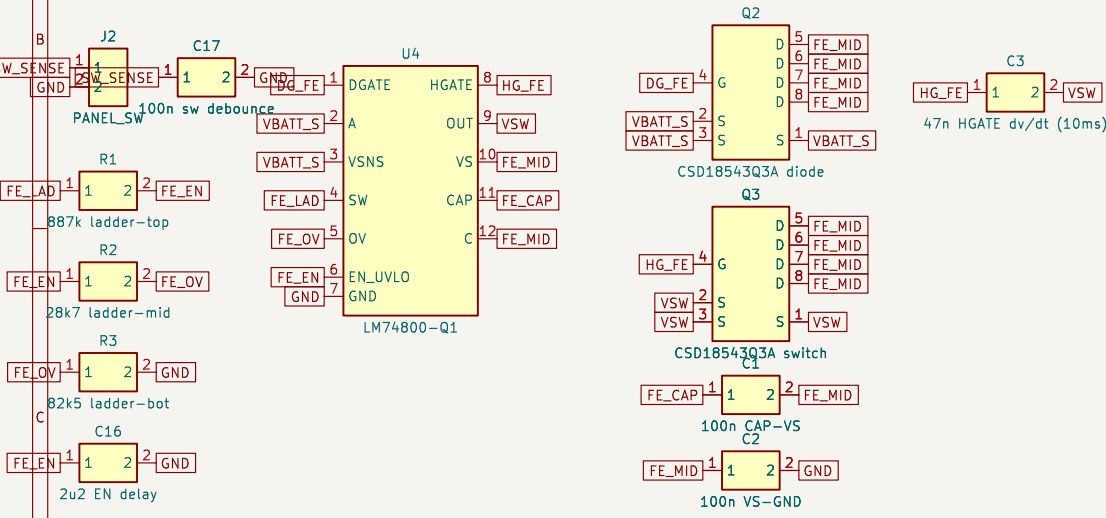


3. SUPERVISOR (always-on ~25uA) + TELEMETRY (switched)

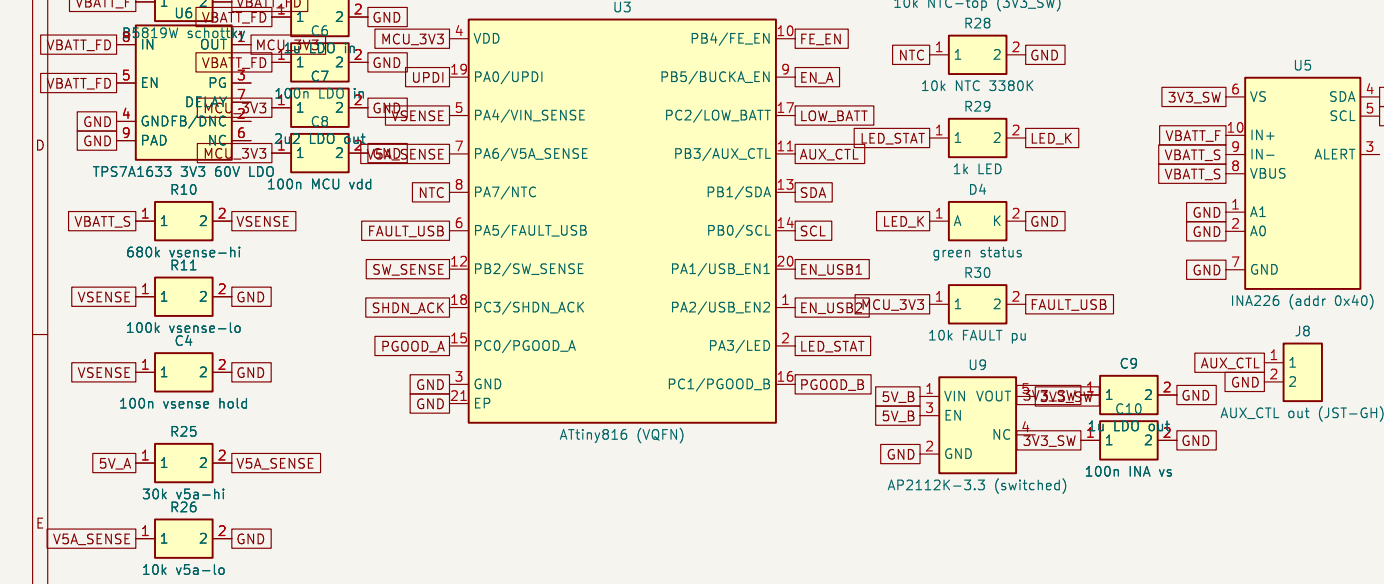


7. PI HARNESS (JST-GH) + UPDI

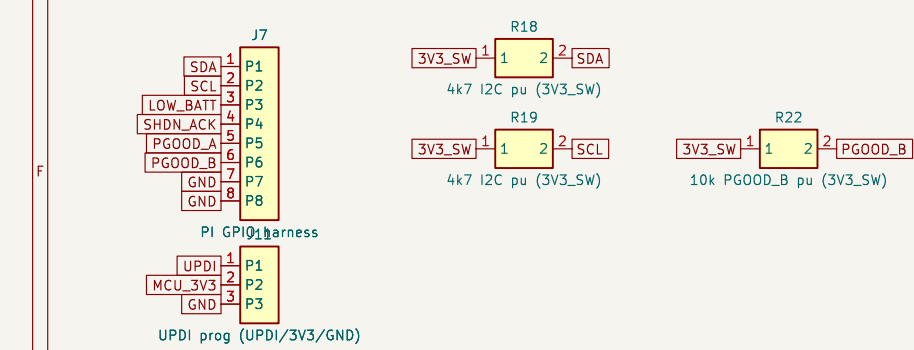


4. BUCK A 5.18V/6A (Pi 5) [values: P1_DETAIL_DESIGN.md sec 2]

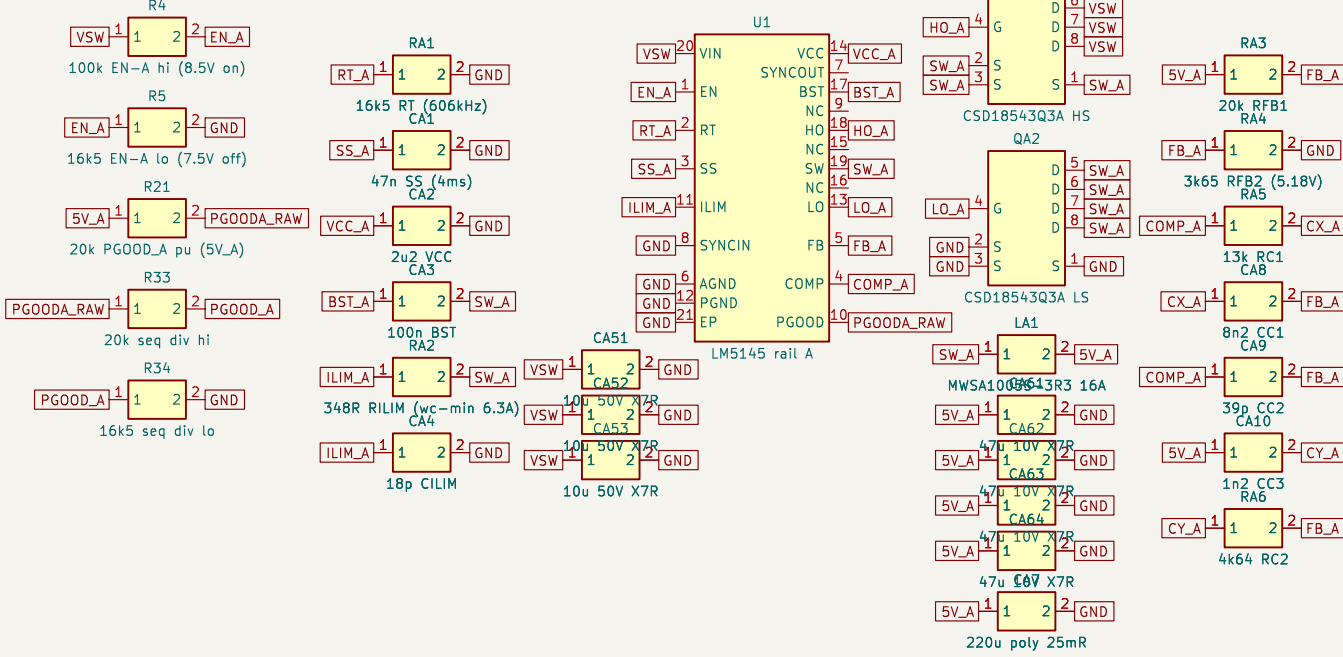

5. BUCK B 5.08V/5A (radios+aux) – EN = PGOOD_A (Pi rail first)

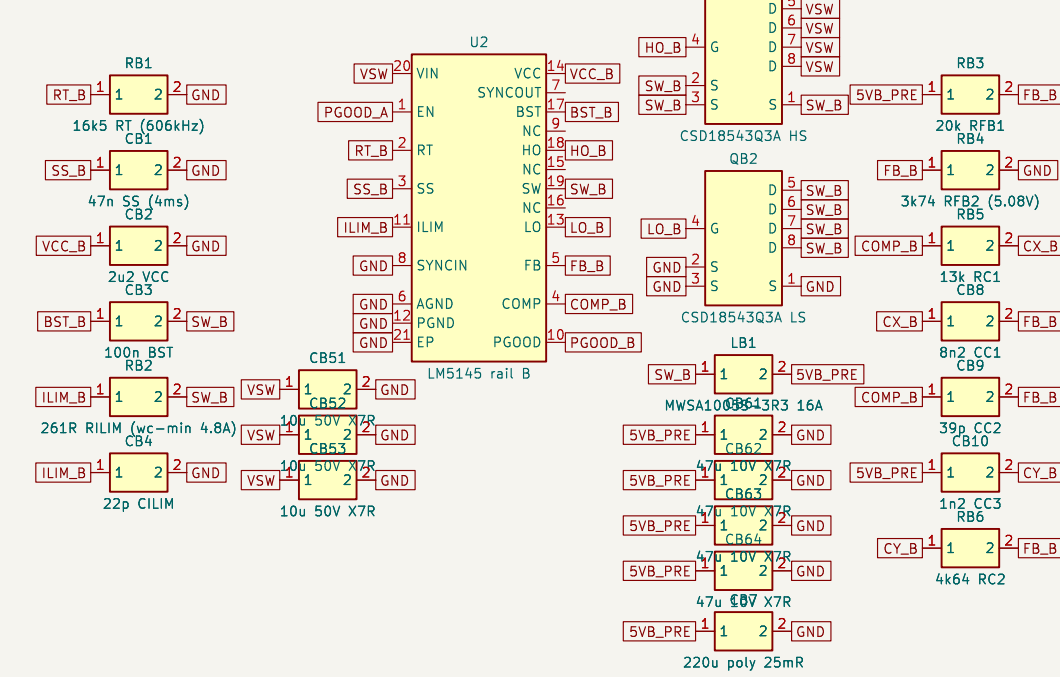

6. RADIO USB (power inject + data passthrough)

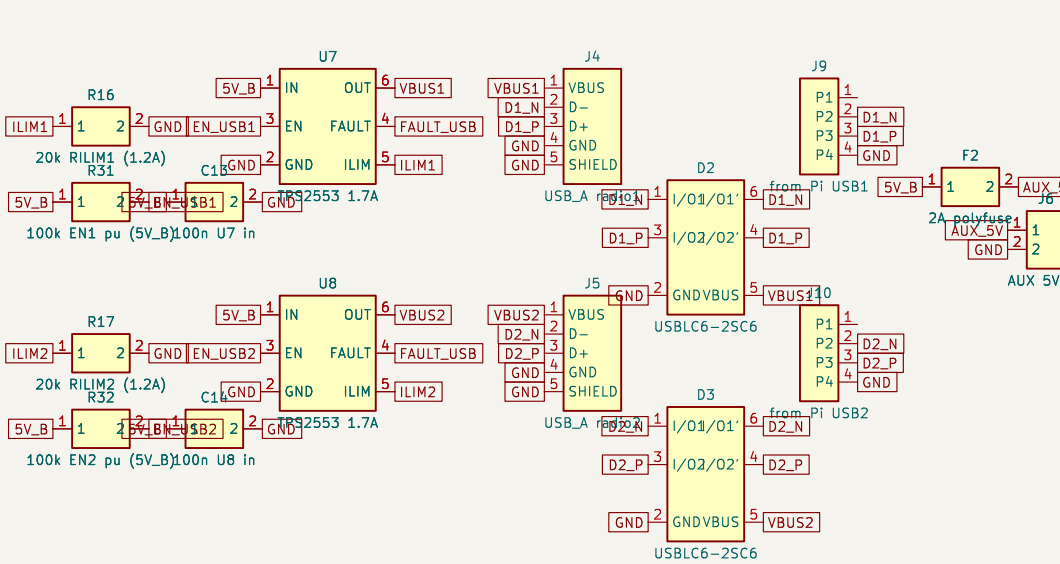

v4: adversarial-review fixes (decoupling, split bulk caps, 3V3_SW pulls, PGOOD seq divider, rail-A sense