




1. INPUT + PROTECTION (3S: 9–13V)

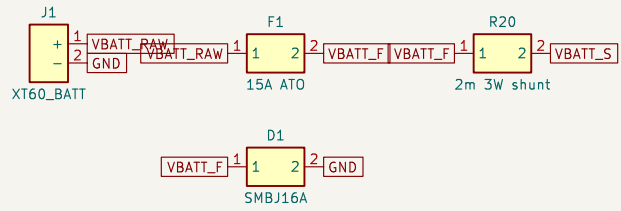


2. FRONT-END: LM74800-Q1 + 2x CSD18543Q3A b2b (rev-pol + on/off + OV; 2.87uA off)

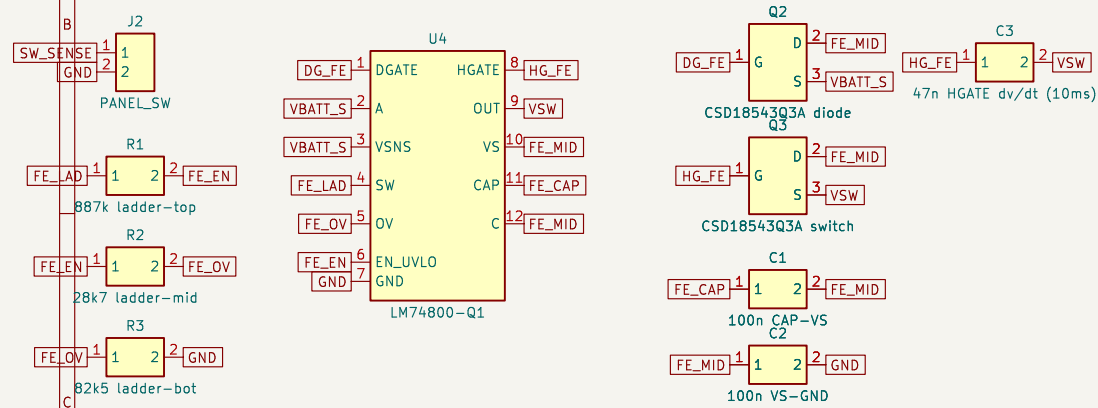



3. SUPERVISOR (always-on ~25uA) + TELEMTRY (switched)

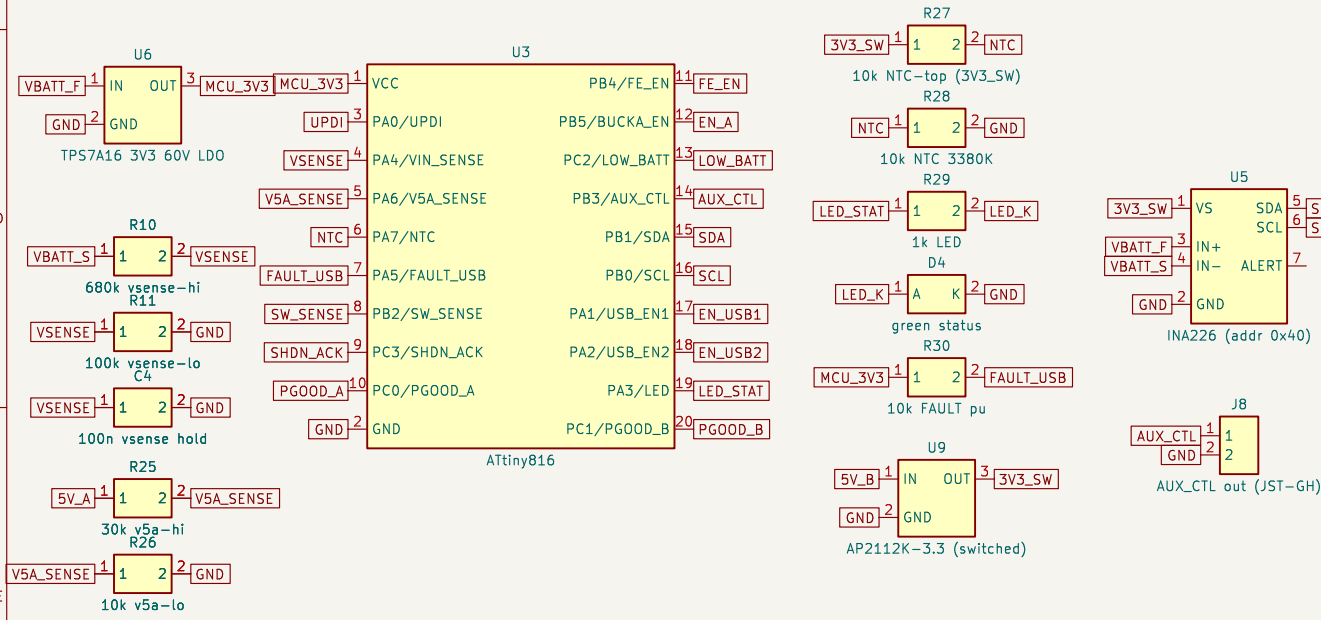



7. PI HARNESS (JST-GH) + UPDI

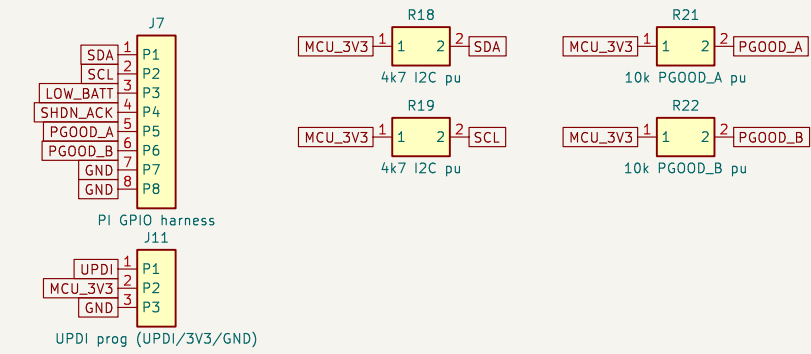


4. BUCK A 5.1V/6A (Pi 5) [values: P1_DETAIL_DESIGN.md sec 2]

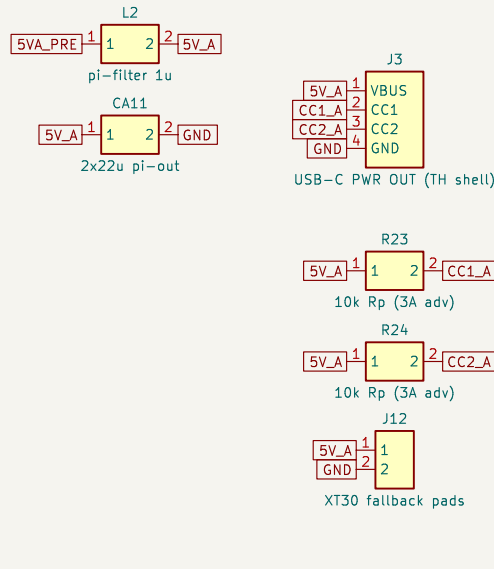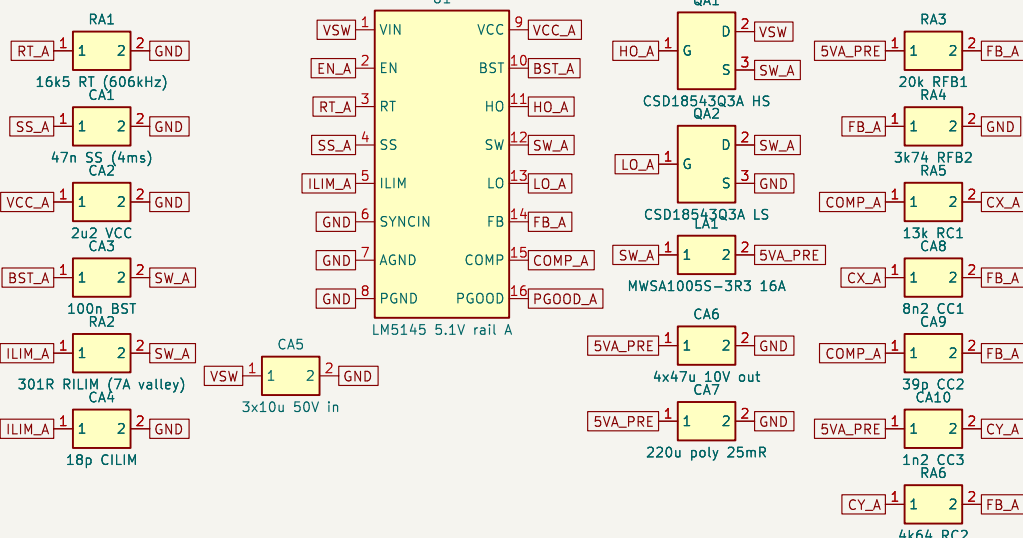

5. BUCK B 5.1V/5A (radios+aux) – EN = PG00D_A (Pi rail first)

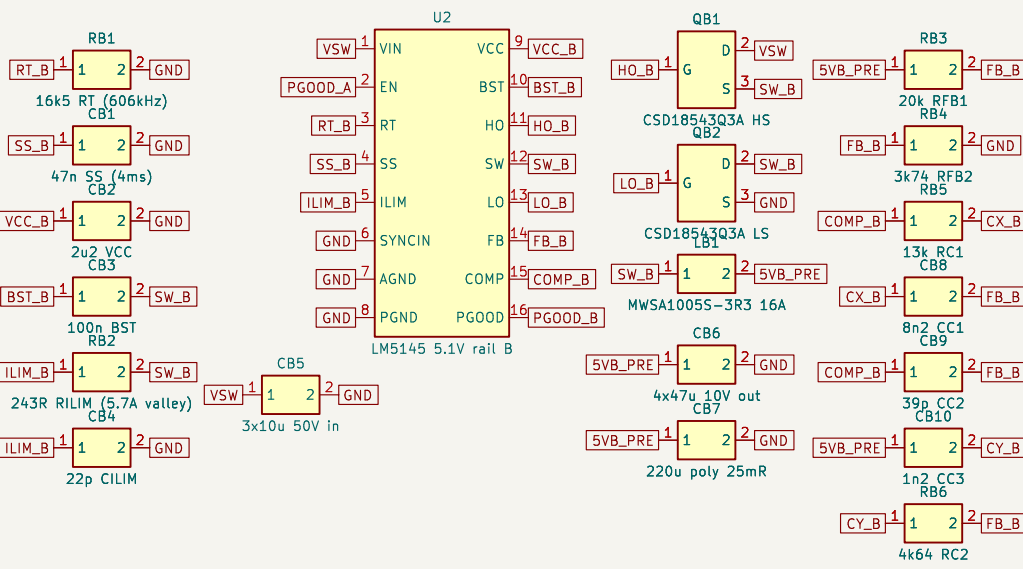

6. RADIO USB (power inject + data passthrough)

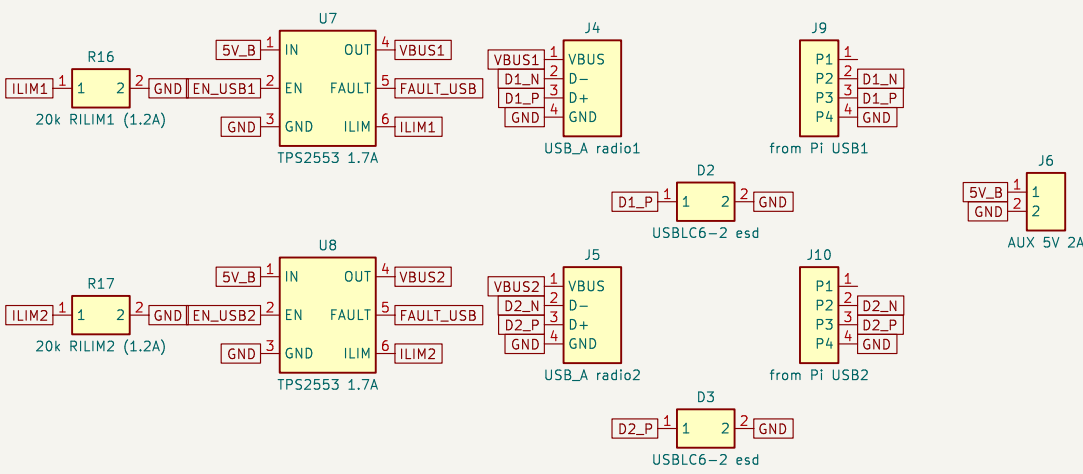

P1 detail design: LM74800 front-end, expanded LM25145 stages; see P1_DETAIL_DESIGN.md

Sheet: /
File: power_board_v1.kicad_sch

Title: SPF rover power board v1

Size: A2 Date: 2026-07-13 Rev: v2

KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Id: 1/1