Process of developing a mesh network with Raspberry Pi in wooded areas

Author
Liam Hogan

Supervisor
Philip Creevy

South East Technological University
Department Of Engineering Technology
School of Engineering
Ireland.
May 19, 2024

Contents

List of Figures

List of Tables

Listings

Glossary

APD   Avalanche PhotoDiode
API   Application Programming Interface
ASK   Amplitude Shift Keying
AWG   Agile Waveform Generator

B2B   Back-2-Back
BBP   Baseband Processor
BER   Bit Error Ratio
BL   Bandwidth-Length
BLAST   Bell Labs LAyered Space Time
BT   Time Bandwidth Product

CD   Chromatic Dispersion
CDMA   Code Division Multiple Access
CPM   Continuous Phase Modulation
CSI   Channel State Information

D   Dispersion Coefficient
DD   Direct Detection
DECT   Digital Enhanced Cordless Telecommunications
DPO   Digital Phosphorous Oscilloscope
DPM   Digital Phase Modulation
DSP   Digital Signal Processing

EDFA   Eridium Doped Fiber Amplifier

FBMC   Filter Bank Multi-Carrier
FDM   Frequency Division Multiplex
FDMA   Frequency Division Multiple Access
FEA   Finite Element Analysis
FEC   Forward Error Correction
FFT   Fast Fourier Transform
FIR   Finite Impulse Response
FRS   Full Response Signalling
FTTx   Fiber To The x

GASK   Gaussian Amplitude Shift Keying
GFDM   Generalised Frequency Division Multiplexing
GIPO   General Purpose Input/Output
GLPF   Gaussian Low-Pass Filter
GMSK   Gaussian Minimum Shift Keying
GSM   Global System for Mobile Communications
GVD   Group Velocity Dispersion

IFFT   Inverse Fast Fourier Transform
IIR   Infinite Impulse Response
IMDD   Intensity Modulation Direct Detection
ISI   InterSymbol Interference
IVI   Interchangeable Virtual Intruments

LAN   Local Area Network
LD   Dispersion Length
LD   Laser Diode
LUT   Look-Up Table

MC   Multiple-Carrier
MIMO   Multiple Input Multiple Output
MLSE   Maximum Likelihood Sequence Estimation
MMF   Multi Mode Fiber
MSK   Minimum Shift Keying
MSO   Mixed Signal Oscilloscope
MZI   Mach-Zehnder Interferometer
MZM   Mach-Zehnder Modulator
NGPON Next Generation Passive Optical Network
NLSE   Non-Linear Schrödinger Equation
NRZ   Non-Return to Zero

ODN   Optical Distribution Network
OS   operating system (OS)
OFDM   Orthogonal Frequency Division Multiplexing
OOK   On Off Keying
OSA   Optical Spectrum Analyzer
OSNR   Optical Signal to Noise Ratio

PAPR   Peak to Average Power Ratio
PD   Photo Diode
P-i-N   P-doped Intrinsic N-doped Photodiode
PON   Passive Optical Network
PRS   Partial Response Signalling

QMDD   Quadrature Modulation Direct Dectection

RF   Radio Frequency
RIN   Relative Intensity Noise

SCPI   Standard Commands for Programmable
                 Instruments
SISO   Single Input Single Output
SMF   Single Mode Fiber
SNR   Signal to Noise Ratio
SOA   Semiconductor Optical Amplifier
SPM   Self Phase Modulation
SS   Spread Spectrum
SSFM   Split-Step Fourier Method
SSSFM   Symmetricised Split Step Fourier Method

TCM   Trellis Coded Modulation
TDM   Time Division Multiplex
TDMA   Time Division Multiple Access
TFM   Tamed Frequency Modulation
TIA   TransImpedance Amplifier
TDD   Test Driven Develpoment
UFMC   Universal Filtered Multiple Carrier
USB   Universal Serial Bus

VISA   Virtual Instrument Software Architecture

WDM   Wave Division Multiplex

Abstract

In this project we aim to transmit data in a forest across a wireless channel,we will look at reference to learn about the technology and why it is used

Chapter 1

Introduction

1.1 Motivation

The motive for looking at this topic are the following:

1. To familiarize with linux os environment

2. To familiarize with bash scripting

3. To Showcase knowledge in the programming language python

4. To Showcase knowledge of embedded systems like the raspberry pi and Arduino uno

5. To Showcase the process of selecting sensor in the purposed area

6. To Familiarize with communication standards in the purposed area

Chapter 2

Literature Review

2.1 Introduction

The following literature review explores mesh networks in a wooded area,When communicating from two devices across a network there are many of issues associated with this communication such as signal loss due to:

- Environmental conditions such as rain .lighting etc

- Whether the device's antenna are in line of sight with each other

- If the devices are in the line of sight with each other. We can still reflections from a multi-path environment

- Possibility of falling trees obstructing the path of the signal causing more attenuation in the signal strength

In this project aims explore mesh networks and transmit data across them, a mesh network is a type of network where no node in the network acts as a master.A node is a device which has a transceiver.As we look at the environment in which this project will be carried out, we can expect different phenomena to occur such as Attenuation According to ITU (1) "Attenuation due to vegetation varies widely due to the irregular Nature of the medium and the wide range of species, densities and water content obtained in practice" Transmitting any radio wave takes energy ,Another factor to consider is whether wind will cause a delay in the signal. This report aims to show my findings and try to account for environmental conditions

2.1.1 Overview

The following section provides a brief overview of this project on mesh networks in a forest the following question is:

1. What frequencies can transmit in a forest

    - What are the disadvantages of transmitting at this range
    - What are the effects of the multi-path environment when there is a line of sight
    - What happens to bon-line of sight

2. What sensors /senor modules should be used

    - What sensors will give a good range in an Irish forest
    - What are the limitations on the board used
    - Is there any need for any additional hardware to accommodate a specific board

3. What microprocessor/hardware should be used?

- The advantages/disadvantages of Arduino vs Raspberry Pi
- What is the major factor in the choice
- How are the sensors wired to the processor
- How to read the data
- What is the effective resolution needed for each application

2.1.2 Mesh network

A mesh network is a type of network that uses multiple devices to relay data between each other, making a decentralized network. The mesh to be used is a wireless mesh network which is created through the connection of wireless access point(WAP) nodes. Wireless mesh networks work through mesh nodes, mesh clients and gateways:

1. Mesh node

   nodes act as mesh routers and endpoints

2. Mesh clients

   these are end devices

3. Gateways

   Data passes through the gateway as it enters or exits a network

The following is a block diagram of a mesh network:
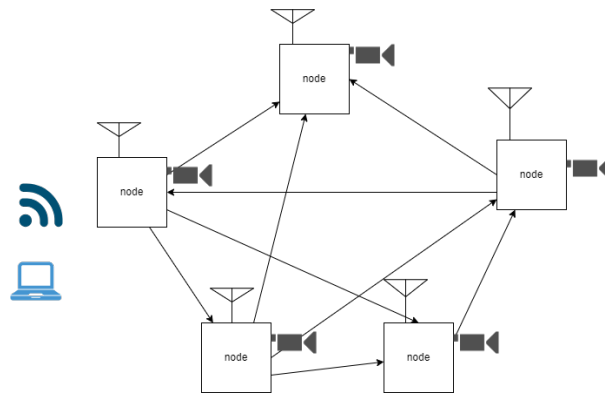
Figure 2.1: Basic block diagram of a mesh network

Each node will be attached to a tree, each having a transceiver

2.2 Hardware Consideration

In this project there needs to be data to transmit,The network needs to be able to:

1. Transmit data for example temperature, humidity,light and camera images.

2. Read data every hour and stored it as a CSV file, The image file will depend on the module chosen

3. Detect any animal that passes the node with a motion sensor.

The following is a rough circuit diagram for the project:
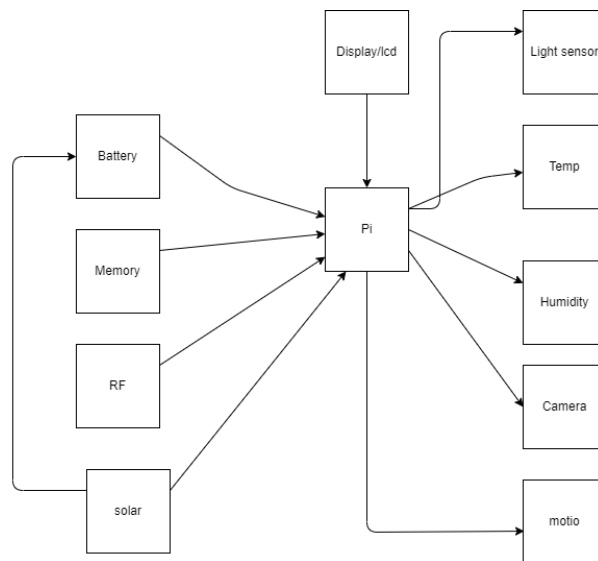
Figure 2.2: Rough circuit diagram for project

1. A PCB cannot be used due to the ordering process taking too long for the timeframe of this project

2. Any type of board like wire wrap would take too long and would be outside of the goals of this project

3. A choice of either the Arduino or Raspberry Pi is left

This section discusses the following:

1. The sensors to be used in the project

2. The ADC we will have to will have to consider

3. The camera chosen will have to be considered for this project

4. The memory module considerations

5. The battery chosen

6. A choice made between Ardunio or Raspberry PI

2.2.1 Sensor considerations

In this section, the process of considering each component of the sensors will be discussed. These components are:

1. Temperature

2. Humidity

3. Light

4. Motion

Temperature & Humidity sensor

The sensor needs to be able to work in the following conditions:

1. The mesh node will be outside

2. The device is in Ireland

3. The device is in a forest

Taking these requirements into consideration,the temperature in Ireland was researched.
The following table was obtained from Met Eireann (2). which shows the highest air temperature in a shaded area

Highest Shaded Air (℃)	Station	Date
18.5℃	Dublin (Glasnevin)	10th 1998
18.1℃	Dublin (Phoenix Park)	23rd 1891
23.6℃	Dublin (Trinity College)	28th 1965
25.8℃	Donegal (Glenties)	26th 1984
28.4℃	Kerry (Ardfert Liscahane)	31st 1997
33.3℃	Kilkenny (Kilkenny Castle)	26th 1887
33.0℃	Dublin (Phoenix Park)	18th 2022
31.7℃	Carlow (Oak Park)	12th 2022
29.1℃	Kildare (Clongowes Wood College)	1st 1906
25.2℃	Kildare (Clongowes Wood College)	3rd 1908
20.1℃	Kerry (Dooks)	1st 2015
18.1℃	Dublin (Peamount)	2nd 1948

Table 2.1: Highest shader air Met Eireann(13^{th} June 2023)

According to the table, the highest temperature is 33.3.The other extreme of the Lowest temperature was then considered:

Lowest Shaded Air (℃)	Station	Date
-19.1℃	Sligo (Markree)	16th 1881
-17.8℃	Longford (Mostrim)	7th 1895
-17.2℃	Sligo (Markree)	3rd 1947
-7.7℃	Sligo (Markree)	15th 1892
-5.6℃	Donegal (Glenties)	4th 1979
-3.3℃	Offaly (Clonsast)	1st 1962
-0.3℃	Longford (Mostrim)	8th 1889
-2.7℃	Wicklow (Rathdrum)	30th 1964
-3.5℃	Offaly (Clonsast)	8th 1972
-8.3℃	Sligo (Markree)	31st 1926
-11.5℃	Wexford (Clonroche)	29th 2010
-17.5℃	Mayo (Straide)	25th 2010

Table 2.2: Lowest shader air Met Eireann(13^{th} June 2023)

According to the table above the lowest temp is -19.1 In consideration for where the project the condition is a range of -19.1℃ to 33.3℃.

Humdity was also researched,Humidity refers to the amount of water vapeor in the air. The following table was obtained from Met Eireann (3):

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
Mean at 0900UTC	87.0	86.4	84.0	79.5	76.9	76.7	78.5	81.0	83.4	85.5	88.5	88.0	83.0
Mean at 1500UTC	80.6	75.7	71.0	68.3	68.0	68.3	69.0	69.3	71.5	75.1	80.3	83.1	73.3

Table 2.3: Realtive Humidity(%) according to met eirrean

The ranges are from 68.3% to 88 % Taking these considerations into account.Here are the different components:

Components	Voltage Range	temperature range	Accuracy	Analogue /Digtial outputs	Current in	additional information
DHT22	3-6 volts	-40 to 80^o C	+/-0.5ºC	Digital	1.5mA	sample period 2 seconds
LM35D2	4 -30 Volts	-55 to 150	+/-0.5ºC (at 25ºC)	Analogue	10mA	None
TMP36	2.7 to 5.5 Volts	-40 to 125	+/-1ºC (at 25ºC)	Analogue	250 µA	NONE
LM75	3.0 to 5.5V	-55 to 125ºC	+/-2.0ºC (at -55 to 125ºC range))	Analogue	100 µA	NONE
DHT111	3-5.5V	0-50 ºC	±2ºC	Digital	1mA	sample period 1 second

Table 2.4: Comparing of temperature sensors

After this, the choice between two sensors was narrowed down to DHT22 and DHT11. The following are the advantages and disadvantages of the DHT22 and DHT11:

Device	Advantages	Disadvantages
DHT22	good accuracy has temp and humidity, falls in our temp range	sample period 2 seconds
DHT11	OK voltage,better sample period	draws a lot of current , and our of range

Table 2.5: Comparing DHT22 and DHT11

DHT22 was chosen. Which has a Digital output. See a wiring diagram next page:

This will have an interface of the following:
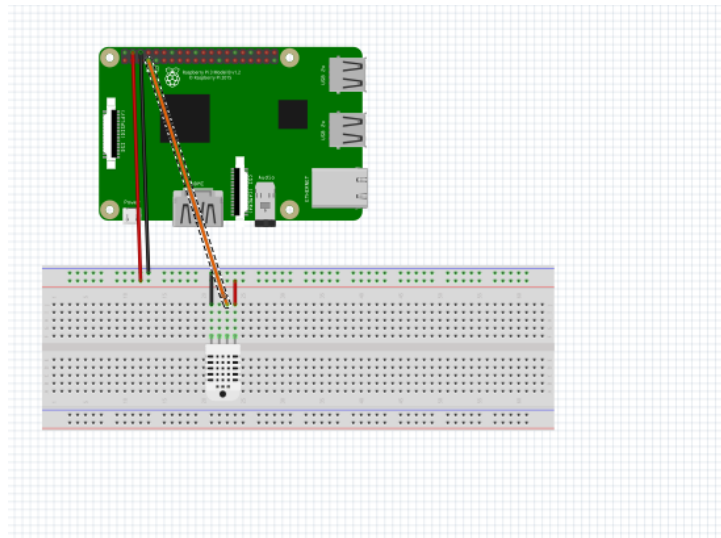
(a) Interface for DHT22
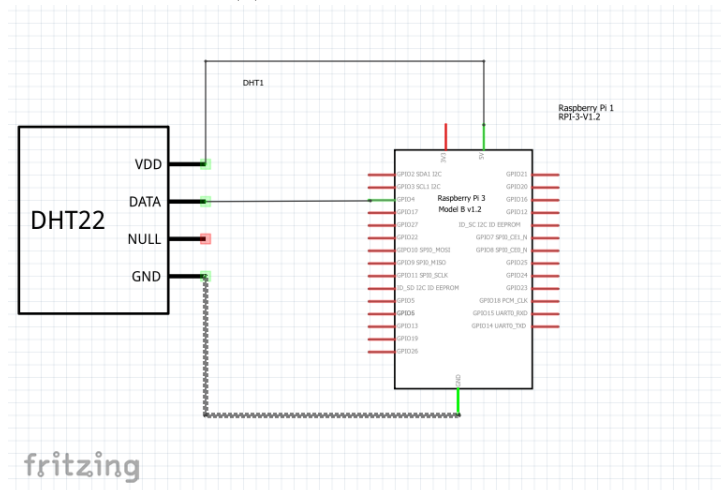
(b) Schematic for DHT22

From above the schematic is seen. DHT22 connections are the following:

- VDD is connected to 5v of the Pi

- the Data pin is connected to GPIO 3

- Gnd pin of the Pi is connected to the ground of DHT22

(4) The following is the link to the datasheet of this module when reading from this component. There is a delay of 2 seconds due to the sampling period.

Light sensor

In this section the following will be considered:

1. What region the project is in

2. What light levels are expected in this country

3. What sensor will accommodate this range

For this sensor the outside aspect of the project must also be considered.The following table was found on (5): This table is the associated lux level indicating when the values are . From

Imminence	Example
0.002 lux	Moonless clear night sky
0.2 lux	Design minimum for emergency lighting (AS2293).
0.27 & 1 lux	Full moon on a clear night
3.4 lux	Dark limit of civil twilight under a clear sky
50 lux	Family living room
80 lux	Hallway/toilet
100 lux	Very dark overcast day
300 to 500 lux	Sunrise or Sunset on a clear day. Well-lit office area.
1,000 lux	Overcast day; typical TV studio lighting
10,000 to 25,000 lux	Full daylight (not direct sun)
32,000 to 130,000 lux	Direct sunlight

Table 2.6: Illuminates values

above the sensor should ideally be 0.002 to 25000 lux, Bearing this in mind these components were researched:

Modules	Voltage Range	Analogue /Digital Outputs	illumination range	Current rating
LM393 with GL5528	3.3v to 5v	Analogue	0 lux to 100lux	250nA
DFR0026	3.3v to 5v	Analogue	1 Lux to 6000 Lux	120uA
LM393 with n5ac501085	max 150V	Analogue	10 lux to 100lux	1mW
LM393 with NSL-06S53	max 100v	analogue	1 to 100	50mw

Table 2.7: table of light sensors

After research DFR0026 (6) is the option proposed for use as it is the best for this application, which will have an analogue output to see the interface (see below):
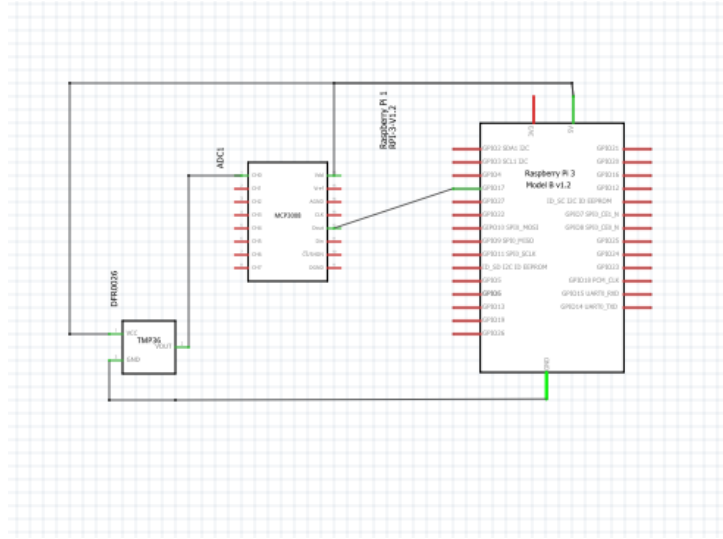
Figure 2.4: Interface for DFR0026

The following are the connections:

1. VCC pin is connected to 5v

2. Gnd of the sensor is connected to Gnd of the Pi

3. The output is connected to ch 0

4. the output ranges from 0 to 5 v

The component relies on the ADC which is on page12

Motion sensor

For this section the following must be considered:

1. The range of the sensor

2. The degree of the sensor

3. How long of a delay is the sensor

The following are the components considered:

Modules	Voltage Range	Distance	Max angle	Analogue /Digital Outputs	Power
HC-SR501	5-20V	3 to 7m	110	Digital	50uA
AM312	4.5-20v	3m	130	Digital	60uA
AS312	-0.3 - 3.6V	12m	130	Digital	100mA

Table 2.8: Motion sensor components

The sensor chosen is AS312(7)(which has a delay time of 2 seconds) which is a digital interface to see the wiring ,See below:

The following is the interface for the device:
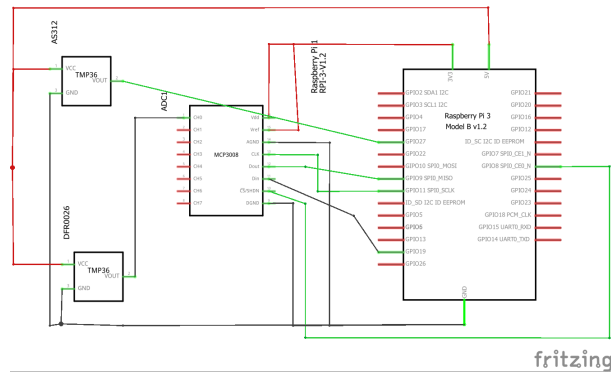
Figure 2.5: Interface for AS312

The connections are the following:
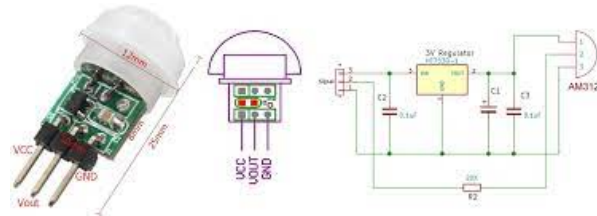
Pinout of AS312

1. VCC is connected to 5v pin of the Pi

2. GND is connected to the GND of the Pi

3. Vout is connected to GPIO 17

This component has the following:

1. Range of 12 meters

2. An angle of 65^o degree

3. A Delay of 15 μ Seconds

2.2.2 Radio Module

For this section there are the following considerations:

- The devices are in a forest

- Meaning Gigahertz isn't a desirable frequency

- A module that has low-power

- A model that will have a high throughput

Through research, I found the following table:

Modules	Tx/RX Voltage	Frequency	Range	TX/RX power	Through put	Error detection	Rx sensitivity	Hopping channel
Gravity: 315MHZ RF Receiver Module	3.3v/5v	315Mhz	50 m	-10dbm -95dm	9.6kbps (max)	none	-108 dbi	no
MM2 Series 900 MHz OEM Radio	3.5 5.0	902 928 Mhz	32km	1175 ma tx rx 125ma	80 - 115.2 kbps	32-bit CRC	-108dbm @ 115.2kbps for BER 10^{-4} -103 dm @153.6 for BER 10 -4	50 to 112, user-selectable
RF 433MHz Transmitter/Receiver Module	5V 3-12v	433.92 MHz	20-200 meters	10 mW	2kbps	ASK modulation no error check	-105 db	no
Digi XBee-PRO 900HP RF Module	2.1 to 3.6v dc	902 to 928 Mhz	14km - 6.5km	24dm	10kps -200kps	NONE	-101dm	FHSS (Software Selectable Channels)

Table 2.9: Radio modules found in research

Out of these, the MM2 Series 900 MHz(8) was chosen.Note that the seller of this radio module has limited the documentation of this module.This makes it hard to draw an interface for this module .

2.2.3 ADC Considerations

For the ADC there are the following considerations:

1. Low power

2. High bit resolution

3. Low number of channels

4. High sample rate

The two things needed for this is a high bit Resolution and a high sample rate

Device	Resolution	Sample rate	Input range	Power consumption
ADC pi Zero	17 bits	100KHz	0-5.06v	10mA
MCP3008	10 bits	200 ksps	2.7v- 5.5v	500uA
DFR0553	16 bits	1.7Mhz	0 5.0V	10mA

Above are the components to choose from for this project,MCP3008 was chosen due to its resolution and sample rate

The following is the schematic for the MCP3008(9)
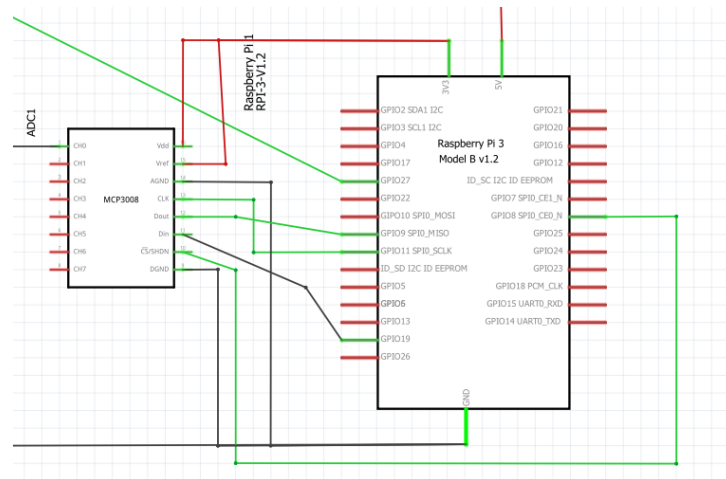
Figure 2.6: Schematic for MCP3008

The following are connections:

1. VDD is connected to 3v3 pin of the Pi

2. VRef is also connected to 3v3 pin of the Pi

3. AGND is connected to the gnd pin

4. CLK pin is connected to GPIO port 11

5. Dout pin is connected to GPIO port 9

6. Din pin is connected to GPIO port 19

7. CS pin is connected to GPIO port 8

8. DGND ping is connected to the gnd pin

This component has the following:

1. A 10 bit resolution

2. Seen as the reference will be 3.3v

3. 200ksps, meaning the delay to read is 5μ seconds

2.2.4 Camera

For the camera, the following has to be considered:

1. Focal length

2. Resolution

3. Power

4. The lux values it operates at

The camera chosen is a Raspberry Pi VR 220(10) Camera To see how to connect look at the following link.

Modules	Voltage range	lens size	Image Resolution	Video Resolution	Frame Rate	Type of Output	Preferred condition	Power
Raspberry Pi VR 220 Camera	3.3V ac	can change with lens	3280 X 2462	1920 x 1080	30 FPS	Need to research	Daytime	38mA
DIGILENT 410-358	3.6v	optical size 1/4 inches	2592 x 1944	?	?	Digital	?	200mA
The Raspberry Pi NoIR	3.3v	1/4 inches	3280 x 2464	1080 or 720	30 60 fps	need to research	house	38mA
OV7670 VGA	2.45 to 3.0v ac	1/6 inches	2.36mm x 3.6um	?	30 fps	analogue	need to research	60mW

Table 2.10: Camera module

2.2.5 Memory module

For this section, we consider the following:

1. The file formatting of the sensor data

2. The file formatting of the camera data

3. What are the possible sizes of data

4. What is the memory size of the raspberry pi OS

In my project the following is used:

1. The sensor data is stored in a CSV file with the following heading: (timestamp, heat, humidity, light level, anything detected), Which can be around 25KB

2. For the camera using 10 MB is the largest file size

3. For the Raspberry Pi downloaded the raspberry imager , This has lots of options such as the following on page 17

After has been we must consider a mircoSD ,The following are considerations:

Product Name	Capacity	Speed class	Read speed	V
SAMSUNG EVO Plus Class 10 microSDXC	256 GB	U3	up to 130MB/s	up
SANDISK Ultra Performance Class 10 microSDXC	128 GB	class 10 u1	up to 80 MB/s	up
Silicon Power 32GB 3D	32GB	class 10	Up to 100MB/s	Up
SanDisk 64GB Extreme PRO	64GB	UHS Speed Class 3	Up to 100MB/s	up

Table 2.11: Mirco SDs in consideration

The best here is the silicon power 32GB due to its temperature range and read and write times. we can consider extra memory:

1. DHTT22 has a sample period of 2 seconds

2. AS312 which has a delay time of 15 μ seconds

3. MCP3008 5 μ seconds

Through reserach,the following was discovered :

Brand	Product Name	Storage Capacity	USB Version	Data Transfer Sp	Read/Write Spee	Durability	Encryption	Form Factor	Compatibility	Price
SanDisk	Cruzer Glide 1GB USB 3.0 Flash Drive	1 GB	USB 3.0	100 MB/s	80 MB/s	Water and shock resistant	No	Standard	Windows, Mac, Linux	$5.99
PNY	Turbo 1GB USB 2.0 Flash Drive	1 GB	USB 2.0	480 Mbps	300 Mbps	Water and shock resistant	No	Standard	Windows, Mac, Linux	$3.99
Verbatim	Store 'n' Go 1GB USB 2.0 Flash Drive	1 GB	USB 2.0	480 Mbps	300 Mbps	Not specified	No	Standard	Windows, Mac, Linux	$2.99

Table 2.12: Memory usb to consider

The Raspberry Pi 4 supports USB 2 and USB 3. For this, the Turbo 1GB USB 2 Flash Drive will be chosen.

2.2.6 Battery

In this section the following must be considered:

1. Enough power for all sensors and radio module

2. Storage of the battery

3. Discharge rate of the battery (how many operating hours can be got out of the battery)

Here are the following Devices I found :

Modules	Voltage	Interface	Power	Chemistry	Supply time
Li-polymer Battery HAT	5v	Micro USB	1.8A	lithium battery	5 hours

Table 2.13: battery considerations

The battery chosen is the li-polymer which has a micro USB How to charge:

- Step 1: Insert the Li-polymer battery into a 2.0mm battery socket

- Step 2: Connect the power adapter to a micro USB or Type-C interface by USB cable.

Aside: this component has the following:

1. A battery that is 3.7v $3000mAh$

2. Output voltage of 5 volts

3. an estimated Power supply time of 5 hours

2.2.7 Arduino vs PI Consideration

In this project, we will have to choose between what microprocessor we will use.There are 3 options:

1. PCB (printed circuit board) where the circuit is deigned in a program like Fusion 360. The major issue is due to the current state of silicon chips which will slow down the progress of the implementation stage

2. Arduino

3. Raspberry Pi

The advantages and disadvantages of the Arduino and the Raspberry Pi are the following:

Arduino	Pi
Advantages	Advantages
1. Arduino has a 10-bit ADC	1. Pi can compile Python (easier to write)
Disadvantages	Disadvantages
1. Arduino has a supper set of C++	1. Pi is a technically a small CPU
2. Arduino only has 6 Analogue pins	2. The Pi needs an ADC circuit to deal with inputs that are analogu

Table 2.14: Advantages /Disadvantages of Arduino vs pi

Although the Arduino would be more efficient than the Raspberry Pi due to Raspberry Pi has an Operating System . The Pi was picked due familiar with Python and Linux. Linux can be used to handle the networking side of the project At the cost of some efficiency in power for an easier time writing the code for this project

Picking a Raspberry Pi

Now that a device was chosen to use the following need to be defined:

1. The amount of GIPO PORTS we need

2. Nature of the output of the sensor

3. Speed of the clock

GPIO(General purpose input/output) is used to select the input/output. The Pi can take in digital signals only Seen as the components are chosen that require A GPIO port (temperature/ humidity, on page 7, Light on page 9, motion on page 10)

At least 3 GPIO ports to be available to us as the light sensor and the motion will need an adc as looking through the documentation .firstly let's look at the different models:

Raspberry Pi Model	Internal Clock Speed	Power (Watts)	GPIO Features	Type of Connectors	SRAM
Raspberry Pi 1 Model B+	700 MHz	5.5	26 GPIO pins	1 HDMI, 1 micro USB, 1 USB 2.0, 1 audio jack	512 MB
Raspberry Pi 2 Model B	900 MHz	7.5	40 GPIO pins	1 HDMI, 1 micro USB, 4 USB 2.0, 1 audio jack	1 GB
Raspberry Pi 3 Model B+	1.4 GHz	8	40 GPIO pins	1 HDMI, 1 micro USB, 4 USB 2.0, 1 audio jack, 1 Gigabit Ethernet, 1 PoE header	1 GB
Raspberry Pi 3 Model A+	1.4 GHz	5	26 GPIO pins	1 HDMI, 1 micro USB, 2 USB 2.0, 1 audio jack	512 MB
Raspberry Pi Zero	1 GHz	1.2	40 GPIO pins	1 mini HDMI, 1 micro USB, 1 micro-USB OTG	512 MB
Raspberry Pi Zero W	1 GHz	1.3	40 GPIO pins	1 mini HDMI, 1 micro USB, 1 micro-USB OTG, 1 Wi-Fi/Bluetooth module	512 MB
Raspberry Pi Zero 2 W	1 GHz	0.8	40 GPIO pins	1 mini HDMI, 1 micro USB, 1 micro-USB OTG, 1 Wi-Fi/Bluetooth module	512 MB
Raspberry Pi 4 Model B	1.5 GHz	7	40 GPIO pins	2 HDMI, 2 USB 3.0, 2 USB 2.0, 1 Gigabit Ethernet, 1 audio jack	1 GB, 2

Table 2.15: Table of Raspberry Pi's

The above table displays the modules ,As our radio modules is 900Mhz we want 1.5GHZ which is the Raspberry Pi 4.This needs a USB c charger and an HDMI mini cable. For wiring our Pi here is the GPIO pin layout:
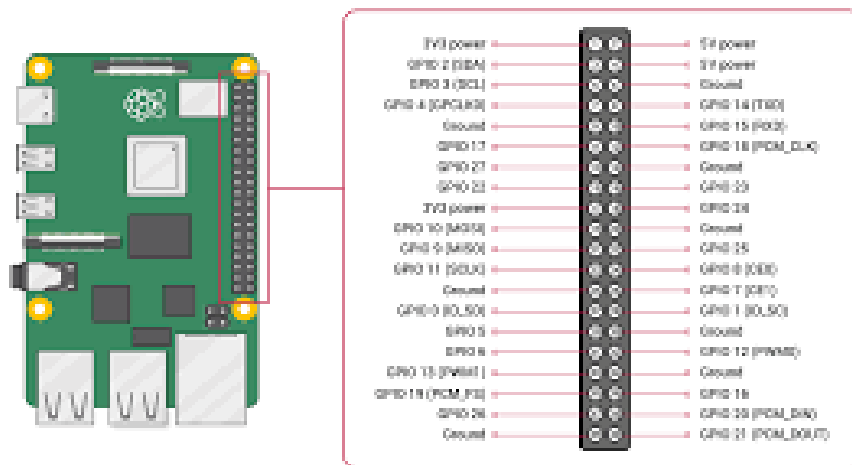
Pinout for the pi

2.2.8 Conclusion

In this project the hardware needed is the following components:

1. 1 x Raspberry Pi 4 Model B

2. 1 x HDMI cable

3. 1 x USBC cable

4. 1 x USB C charging head

5. 1 x DHT22

6. 1 x DFR0026

7. 1 x AS312

8. 1 x MM2 Series 900 MHz

9. 1 x MCP3008

10. 1 x Raspberry Pi VR 220 Camera

11. 1 x Li-polymer Battery HAT

12. 1 x Turbo 1GB

13. 1 x silicon power 32GB microSD

2.3 Software considerations

Having established the essential hardware needed for this project.Next consider the following for the software of the project:

1. How to structure code

2. Linux set up of sever and nodes

3. How will data be sent

4. Will this be an OOP or functional approach?

5. How to program each device?

2.3.1 Raspberry Pi OS

In this section it must be kept in mind that each OS is heavy weight the following needs to be considered:

1. If the SD is formatted the data on the SD is lost. Does it corrupt the card?

2. An os that is low in capacity

3. Is a desktop needed or can we use the terminal?

4. How does the OS respond to USB drives?

According to the (**?**) the imager will erase all the data while installing the os. From research the suggestion of backing up the data is a good suggestions. for now the recommended OS is used. and strip down as the project progresses. which will be discussed in the methodology section of this report.

2.3.2 Sensor code

In this section the following will be discussed :

1. DHT22

2. AS312

3. MCP3008

4. DFR0026

5. Kuman for Raspberry Pi 3B+ TFT LCD Display

6. Raspberry Pi VR 220 Camera

the project code will mainly be object-oriented. so the goal is to first test it with my laptop and Create A bash file full of commands to install the libraries,making the code to be split up into different parts so that all that is needed is the libraries used and code that won't all have to compiled in one file.

DHT22

In this section we have to consider the following:

1. The GPIO port as on page 8 This is connected to port 3

2. The type of output is digital so no extra hardware/code is needed

The following is a rough guide on how to read from the DHT22 from the following link. Firstly open the terminal in the Pi and type the following commands:

```
1            git clone https://github.com/adafruit/
                 ↪ Adafruit_Python_DHT.git
2            cd Adafruit_Python_DHT
3            sudo apt-get update
4            sudo apt-get install build-essential python-dev
5            sudo python setup.py install
```

the code does the following:

1. firstly git clone will clone the repository on to device

2. Then change dirertorys a

3. update linux

4. install dev kit for python

5. and install the setup

this will then lead to the following code:

Listing 2.1: Example code for DHT2

```python
#Libraries
import Adafruit_DHT as dht
from time import sleep
def setup_DHT22(Gpoiport:int):
    humidityy,temp=dht.read_retry(dht.DHT22, Gpoiport
        )
        sleep(5)
        return humundity,temp
h,t=setup_DHT22(3)
print('Temp={0:0.1f}*C  Humidity={1:0.1f}%'.
    format(t,h))
```

this code will do the following:

1. Import DHT from the adafuit libaray

2. in the functipon whch takes the gpioport as an integer this will read the data on the pin and print it out

AS312

for this section i followed this link we also want to keep in mind the following:

1. This has a digital interface and is connected to GPIO 27

Here are the rough steps firstly type the following into the terminal

```
sudo apt-get install python-rpi.gpio
```

which will intall a gpio python module

Then type this into an IDE of your choosing

Listing 2.2: Example code for AS312

```python
import RPi.GPIO as GPIO
import time

pir_sensor = 27
GPIO.setmode(GPIO.BOARD)

GPIO.setup(pir_sensor, GPIO.IN)
current_state = 0

time.sleep(0.1)
current_state = GPIO.input(pir_sensor)
if current_state == 1:
        print("GPIO pin %s is %s" % (pir_sensor,
            current_state))
        # trigger camera
# must look up this
GPIO.cleanup()
```

this code does the following:

1. it will look at the pin for a pulse

2. onece it sences a pulse it will tiggerr the camerae

DFR0026

from the last example, nothing has changed from the last component an example code for this can be found on page 20

2.3.3 MCP3008

for this section, we want to consider the following:

1. The MCP3008 data out is GIPO 9

this section follows this link firstly try the following in command in the terminal

```
sudo raspi-config nonint do_spi 0
```

Listing 2.3: ADC code

```python
from gpiozero import MCP3008
from time import sleep
DFR0026 = MCP3008(channel=0, device=0,port=9)

print ('raw: {:.5f}'.format(DFR0026.value))
sleep(0.1)
```

this code will selcect a channel and device , port and print the vaules of the adc's

2.3.4 Raspberry Pi VR 220 Camera

to get started with this simply look at the following link here is an example of the code of this module :

Listing 2.4: example code for camera

```
1              from picamera import PiCamera
2              from time import sleep
3
4              camera = PiCamera()
5
6              camera.start_preview()
7              sleep(5)
8              camera.stop_preview()
```

this will take a photo of what is in fron of the camera

2.3.5 MM2 Series 900 MHz

for this section, the seller of this module has no public documentation so it is hard to come with an make a interface for this section

2.3.6 code structure

The code structure for this will be an object-oriented program all the individual sensors and hardware for the pi will be as displayed above the code in this section will be formatted into objects for example I will have an object called proj_sensor and a method of this would be DHT22 while an attribute of this would be the sample rate the following is a rough breakdown of the structure of the code

- Sensor object

  - Temperature and humanity method
  - light method
  - Motion method which triggers the camera
  - Battery method which is a constructor method
  - Memory method which links with the radio

- radio object which reads from Memory and transmits the data

2.3.7 File structure

For the File structure, we want our sensor data to be stored every hour in a CSV file with the following column headings:

1. timestamp

2. Heat

3. Humidity

4. light level

5. motion detected (True/False)

21

for the writing to Date, we will use Pandas to write to the CSV file for file sorting, I will use the Python Library glob which I can use to look for files the following is an example of how to make a CSV file: firstly let's make a data frame:

Listing 2.5: sample code for turning sensor data into a data

```python
import pandas as pd
import numpy as np
from datetime import datetime
cols_name=["Timestamp","Tempeature","Hummidty","Light_level","Motion_dected"]

#assume that being recorded now
data=[]
timestap=datetime.now()
timestap=timestap.strftime("%d/%m/%Y %H:%M:%S")
Current_state=1
Heat=0.40
Hummidty=1.0
Light_level=0.23
data=np.array([[timestap],[Heat],[Hummidty],[Light_level],[Current_state]])
data=data.T
df= pd.DataFrame(data,columns=cols_name)
```

Next, use the.To_csv method from pandas another Libraries that could be useful is the Tkinter here is a sample of how to store where the file is gonna be:

Listing 2.6: example code for storing directory

```python
import tkinter as tk
from tkinter import filedialog
import json
import os

root = tk.Tk()
root.withdraw()
selected_dir = filedialog.askdirectory()

if not os.path.exists('selected_dir.json'):
        # Write the selected directory to a JSON file
        with open('selected_dir.json', 'w') as f:
                json.dump(selected_dir, f)
                print("Successfully saved selected directory to JSON file.")
else:
        print("File 'selected_dir.json' already exists. Not saving the directory.")

root.quit()
```

Other useful Libraries allow you to select all .csv, png called glob for our TDD Section we will have use the following command:

```
# !/bin/bash

dir_name=$1

size=$(du -sh "$dir_name" | cut -f1)

echo "Directory size: $size"
```

This is a script that will look at a director this can be home dirctory this will cal the space if 13K the "— cut -f1" will only foucs on the size string messeage and then print out the size. this is just a sample script

2.3.8 Test Driven devolmponet

In this project ill will be useing Test Driven Development (TDD) is a software development approach where tests are written before the actual code the following is the advantages and dissadvantges of TDD:

1. Advantages

    (a)

2. Dissadvantages

    (a)

2.4 Attenuation

Attenuation refers to a reduction in the strength of a signal. Attenuation occurs with any signal, whether digital or analogue. Seen the aim of making a network the first step is to look into what frequencies can be transmitted and received.
In the environment in which we want our project to take place, we want the following:

1. An antenna that a high so we can affect the data rate of the signal

2. A frequency range at which Attenuation is not present

Through research, I found the following plots:

1. First Plot The first plot I got for Savage e.t al pg. 7 (11)
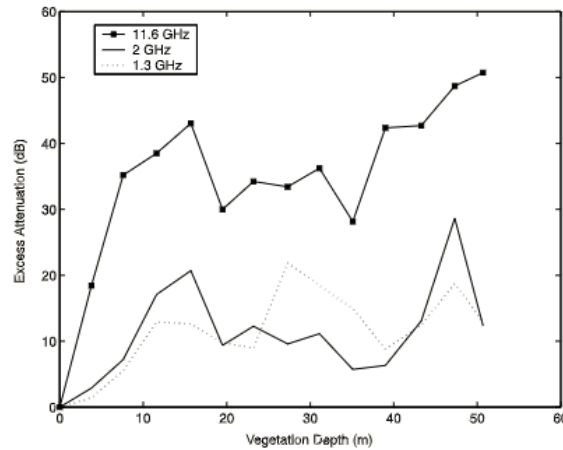
Figure 2.7: Silver Maple in-leaf excess attenuation for the line of trees geometry (receiver antenna height: 3.5 m, SAVAGE ET AL.pg.7

This graph displays as vegetation depth increases Attenuation rises. The problem with this graph is that it doesn't give an in-depth view of which attenuation occurs. This then led me to look up the International Telecommunication Union (1) recommendations for Attenuation in wooded areas

2. Second Plot V is the vertical polarization H is the horizontal polarization
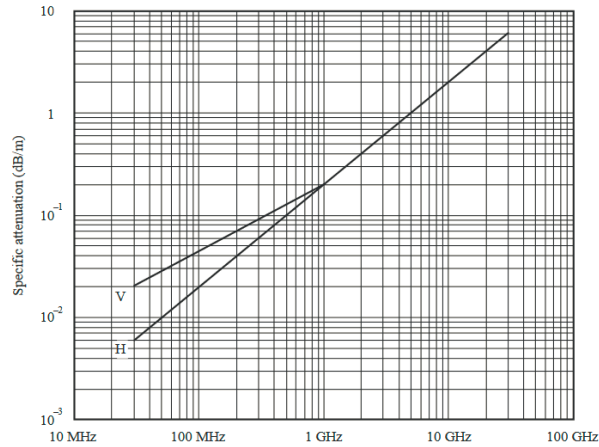
Figure 2.8: Specific attenuation due to woodland (Recommendation ITU-R P.833-7 (02/2012) Attenuation in vegetation pg.5

From this graph we can assume the following:

(a) From a frequency $\geq$15GHz we can assume Attenuation is more components

(b) Around the 1 GHz range we get low values of Attenuation

(c) in the MHz range we get the best response

from this, I selected the range which is $10^6 hz$

so now that we established our range let us consider what happens when it rains
(12)

Frequency MHz	Attenuation dB/m
106	0.04
466	0.12
949	0.17
1852	0.3
2118	0.34

Figure 2.9: Predicted attenuation due to rain for the region, which is measured by using the ITU standards,(Source: Hindawi(2014))

Ideally, we want a low MHz but we want speed and this is dictated by what we choose let's further see how radio waves are affected by water/rain

2.4.1   Absorption of water

for this, I found this graph from Lunken Heimer (13)
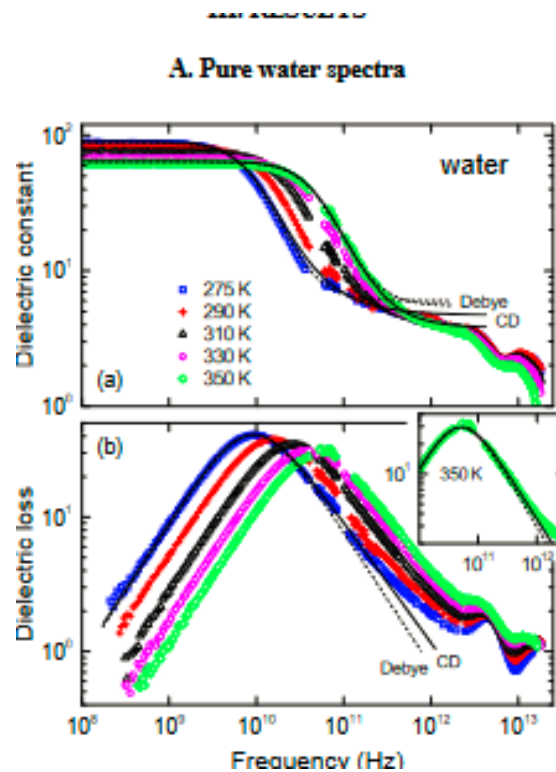
Figure 2.10: absorption of water

According to the graph, Water absorbs MHz frequencies which will affect the transmission in the transmission and in some cases, we might have to consider non-line-of-sight communication when it rains or we might also consider another node to route to receive the node.

2.5 mesh network considerations

For this section, we have to consider the following:

1. How are we setting up the network

2. What framework are we using to set this Up

3. What are the advantages/disadvantages

In my research I found two main frameworks that this project could use to achieve the mesh network these are the following:

1. LORA

2. Zigbee

According to Chen (2023)(14) "LoRa, as one of Low Power Wide Area Networks (LP-WANs) technologies, aims to enable IoT devices to perform long-range communications with lower power consumption [18]. LoRa makes use of the chirp spread spectrum (CSS) modulation to improve the transmission distance up to kilometres and also be resistant to multi-path effects."

According to Vlad(15), "ZigBee is an LP-WPAN (Low-Power-Wireless Personal Area Network) with short range and low power consumption, as mentioned before. The range for ZigBee devices is up to fifty meters and it is characterized by a low data rate, having a maximum value of 250 kbps. The protocol is suitable for sensors and IoT applications because of the low data rate and low power consumption"

the following are the differences between the two: from research, these are very similar but

LoRa		ZigBee	
Advantages	Disadvantages	Advantages	Disadvantag
Long transmission distance	Low transmission rate	Low power consumption	Low data ra
Low power consumption	Slow data transfer rate	Long range	Limited ran
Multi-channel information procession	Small payload	Scalability	Signal interfere
Strong anti-interface ability	Low bandwidth	–	High-sensitivity
High-sensitivity levels	Spectrum interference		

Table 2.16: Advantages and Disadvantages of LoRa and ZigBee

it seems if I plan on adding lots of Zigbee is the best for this challenge

2.6 Review key of research Papers

The following are the research papers I used

1. zhao

   In my research, I found multiple projects that are similar to mine In Zhao(2023)(16, zhao) used LORA to track light sensitivity, air pressure one of the challenges Zhao came across was Attenuation as stated above and also the author came across the problem of not having sufficient solar panels

2. Daniel

   Another paper I found in my research is by Daniel (17) In this, Daniel discusses modeling radio wave propagation in a forest environment which isn't in the scope of the project Daniel's work shows that a better approximation for transmission loss was a key read to under what happens on a more in-depth scale in my project

3. Anna

   (18) in Anna's paper she mainly used LORA where she compared line of sight and the non-line line of sight environments in urban and forested areas this paper aims to study the effects of signal propagation in different environments.

4. ITU

   (1) in ITU in most research papers I found it referred back to this document this document was very helpful in terms of understanding Attenuation and challenges that face

2.7   Summary

This report highlights the challenges at come from transmitting data in a wooded area these challenges are the following:

1. Attenuation

2. Absorption

In a wooded area, we established that Attenuation occurs due to the reflection, and penetration of radio through any type of medium. We established that our antenna will have to be in the Mhz range but will still have signal loss /errors due to Absorption of the signal received due to rain or water being in the signal path we have yet to consider the non-line of sight environment but this is to be discussed when prototyping, this report mainly focuses on the hardware where the focus is on sensors such as:

- Temperature

- Light

- Motion

- Humidity

The report focuses on how to read this data from a Software perspective the code will be an object-oriented program where the code will be separated into different blocks of code so the file size is minimized and leads to a faster compile time.

Chapter 3

Methodology

3.1 Introduction

In this Section the proposed methodology of this project will be discussed this will cover the following:

1. The Procedure of the project

2. The Additional reserach

3. The setup of the raspberry pi

4. The Model Development

5. The Data Analysis Methods

6. The validity and reliability

7. The Limitations and Delimitation

8. The timeline

3.2 Setup of raspberry pi

Firstly once you have your pi heres a quick guide to setup the pi are the following:

1. once you unpack the pi be sure to connect keyboard mouse and hdmi cable

2. next on a computer you must download the raspberry pi imager and selet the 64 bit recommned os

3. once u have os set simpley put the mircosd card into the pi once the pi is setup you can make sub dirrys for this project type the following:

        git clone https://github.com/mistaherd/meshnetwork_in_forest.git

    this will downlaod the nessary eniroment for setinng up the pi intiall this will have to built out through the process of the project look at the timeline Section

4. next simply follow the ReadME.md file to understand how to setup the py

3.3 Additional Research

3.4 Additional Research

In this section will discuss any extra research done on the project. in this section we will discuss the following:

1. ADC

2. Radio module

3.4.1 ADC

The MCP3008 was not available when ordering parts,Another part for this was choosen which is the DFR0553 which has the following:

1. a supply voltages(VCC) of 3.3 to 5 v

2. Analog signal detection 0 to 5v

3. 4 analog chanel's

4. resolution of 16 bits

5. Operating current of 3mA

3.4.2 Radio module

for this section we want to keep the following in mind :

1. We want a module that will send and received data

2. we don't want an expensive solution due to wanting to have multiple nodes

3. must we pick a standard?

4. what module has an open source project on it

5. how do we set up a mesh network with this

Do we need a radio standard?

Lets assume we communicate with two pi via wires we know that an interference will occur when we commutation that is wireless we can have multiple cases where interference can occur these are the following:

1. the signal being reflected of objects such as trees

2. the signal can reach the receiver due to an object blocking the antenna

3. the signal isn't power to be picked up by the receiver

one essential part of this project is the ability to have our nodes have an address to set this up from a communication preceptive we could develop this when there is open source project that has sorted out the routeing for you. only issue with this approach is if there is any issues that come from the open source project we will inherit the bugs with this in mind the following standards were found

1. LoRa

LoRa

In (19) lora is used that will organize sensor data from all nodes in the spanning tree toward the root(laptop /PC) this can be show by the following: this proves it possible to make a mesh


Fig. 3. Recursive data collection. (a) Each node (other than the root) has a data item indicated by a square. (b) Root requests data from nodes A and B. (c) Nodes A and B request data from nodes C–F. (d) In the next round of requests, the root collects the data items of nodes C–F from nodes A and B.
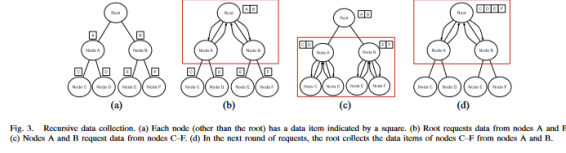
Figure 3.1: protocol Wu used(wu_lie et.al,2023:16705)

network using Lora.

from looking online Lora has more projects that are open source meaning we can use it.freely for example

Lora is uses spread spectrum modulation, In (20) spread spectrum is apparent in Shannon's theorem which states the channel capacity C the upper limit on the information rate of data that can be communciated at a lower error rate through the received signal power S:

$$C = B \log_2(1 + \frac{S}{N})$$

Where B is the is the bandwidth of the channel in hertz.Where the bandwidth is:

$$B = F_{max} - F_{min}$$

spread spectrum creates a pseudo-random code sequence that modulates the data signal which will determine the how the signal is spread out.

To simulate the system we can use the following FIR response as an example in a given
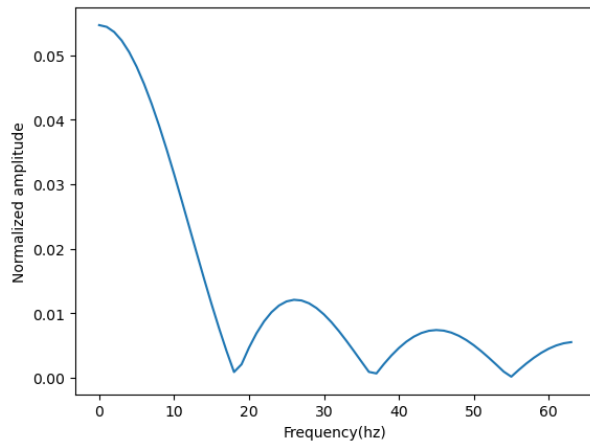
Figure 3.2: sample graph of a FIR response

medium of transmit each bandwidth is the length the of the sinc-roll-off which degrade depends on the impulse response in this given bandwidth channels are separated in the same fashion .

3.4.3 What is the difference between a port and a channel

In (21) "A port is a virtual point where network connections start and end. Ports are software-based and managed by a computer's operating system. Each port is associated with a specific

process or service. Ports allow computers to easily differentiate between different kinds of traffic: emails go to a different port than webpages, for instance, even though both reach a computer over the same Internet connection."

3.4.4 Why the MM2 Series 900 MHz wasn't picked

When ordering the parts for this module issues where due to company not selling the product to enterprise-level businesses so then two alternative radio modules were found:

1. SB Components LoRa HAT for Raspberry Pi

2. RPIZ SHD LORA433 Raspberry Pi Shield - LoRa, 433 MHz, SX1268

when we compare these we get the following table:

Modules	Tx/RX Voltage	Frequency	Range	TX/RX power	Through put	Error detection	Rx sensitivity	Hopping channel
SX1268 433M LoRa HAT	5v	410.125~493.125MHz or 850.125~930.125MHz	5KM(Sunny day; open area; Antenna: AUX 5dBi, Height 2.5m; Air Speed: 2.4kbps)	11ma /100ma	0.3Kbps	None	-147dBm@0.3Kbps (On air)	None
SB Components LoRa HAT for Raspberry Pi	5v	915/868/433 MHz	5km	22dBm	0.3Kbps	None	N/A	None

Table 3.1: Comparing New Radio modules

3.4.5 SB Components LoRa HAT

Which has a E22-900T22S on the board which has a throughput rate of 0.3kbps62.5kbps so the maximum time it will take to get to a node will be around 16 seconds depending on distance ,the module has two was of interacting with the board:

1. Pi

2. usb to windows desktop in this configuration we can test single node from our laptop this is just to test sending message across the serial

This hat supports three frequencies:

1. 868 Mhz

2. 433 Mhz

3. 915 Mhz

E22-900T22S

E22-900T22S is a wireless serial port module (UART) based on SEMTECH's SX1262 RF chip. It has multiple transmission modes, working in the 850.125MHz 930.125MHz, (default 900.125MHz).which has the following functions:

1. LoRa spread spectrum

2. Listen before talk(LBT):

   The module will monitor the channel before transmitting data , if the environment exceeds the threshold. it will be delayed .

3. RSSI(Received Signal Strength Indicator):

4. Networking function:

5. Ultra-low power consumption

6. Broadcast monitoring

3.5 Software Module Development

This section is here to discuss the method we took for developing software for the following:

1. Sensors

2. ADC

3. Camera

4. Radio module

5. Memory management

6. TDD

3.5.1 Sensors

This Section will discuss the following:

1. DHT22

2. AS312

3. DFR0026

To see the light sensor look on page 34

DHT22

For this section we used the following libraries:

```
1  #!/home/mistaherd/Documents/Github/meshnetwork_in_forest/env/lib/
       python3.11
2  import adafruit_dht
3  import board
4  import pandas as pd
```

This uses the library from this link

1. we define the our class

```
1      class DHT22:
2      ##Set DATA pin to pin 4
3          def __init__(self):
4              """this will setup the  data pin  for  DHT2"""
5              # self.dhtDevice =adafruit_dht.DHT22(board.D4)
6              self.dhtDevice =adafruit_dht.DHT11(board.D4)
7              self.humidity=self.dhtDevice.humidity
8              self.temperature=self.dhtDevice.temperature
```

   In this class we have define our DhT device as 11 seen as the DHT22 was broken so we set our gpio pin 4 and setup the variables that read the sensor data

2. Next we read the data from the following function.

```python
def Read_DHT22_data(self)-> tuple[float,float,str]:
    """This  will setup a DHT instance and  return the
        data from the sensor"""
    try:
        return self.temperature,self.humidity
    except RuntimeError as e:
        print(f"Error reading sensor: {e}")
        return None, None
```

this will return out the temperature and humidity if the sensor is not connected this will return nothing . next use the following:

```python
if __name__ =="__main__":
    DHT22()
```

AS312

For this we import the following libraries:

```python
#!/home/mistaherd/Documents/Github/meshnetwork_in_forest/env/
    lib/python3.11
import RPi.GPIO as GPIO
import time
```

1. next we set up our variables in the class

```python
class AS312:
    def __init__(self):
        "connect the AS312 to pin 17"
        self.pin_number=17
        self.GPIO=GPIO
        self.GPIO.setmode(GPIO.BCM)
        self.GPIO.setup(self.pin_number,GPIO.IN)
        self.current_state=0
```

This sets current state as 0

2. next we detect movement

```python
def read_state(self)->bool:
    time.sleep(0.1)
    self.current_state =bool(self.GPIO.input(self.
        pin_number))
    return self.current_state
```

DFR0026

From the repository DFRobot$_A DS$1115$we do the following$:

import the libraries

```python
#!/home/mistaherd/Documents/Github/
    meshnetwork_in_forest/env/lib/python3.11
from DFRobot_ADS1115 import ADS1115
import time
```

Next we define our variables

```python
class DFR0026():
    def __init__(self):
        self.ADS1115_REG_CONFIG_PGA_6_144V        = 0x00
            # 6.144V range = Gain 2/3
        self.ADS1115_REG_CONFIG_PGA_4_096V        = 0x02
            # 4.096V range = Gain 1
        self.ADS1115_REG_CONFIG_PGA_2_048V        = 0x04
            # 2.048V range = Gain 2 (default)
        self.ADS1115_REG_CONFIG_PGA_1_024V        = 0x06
            # 1.024V range = Gain 4
        self.ADS1115_REG_CONFIG_PGA_0_512V        = 0x08
            # 0.512V range = Gain 8
        self.ADS1115_REG_CONFIG_PGA_0_256V        = 0x0A
            # 0.256V range = Gain 16
        self.ads1115 = ADS1115()
        self.ads1115.set_addr_ADS1115(0x48)
        self.ads1115.set_gain(self.
            ADS1115_REG_CONFIG_PGA_6_144V)
        self.adc_channel=0
```

This configures all the pins and set the associative gain

Next read the analogue channel

```python
    def read_voltage(self):
        return self.ads1115.read_voltage(self.adc_channel
            )
```

3.5.2 Camera

Here are the steps for module development of the Camera:

1. install the following libraries:

```
1          #!/home/mistaherd/Documents/Github/
              meshnetwork_in_forest/env/lib/python3.11
2          from picamera2 import Picamera2 ,Preview
3          from time import sleep
4          from datetime import datetime
```

2. we dine our class variables

```
1      class Raspberry_Pi_VR_220:
2          def __init__(self):
3              """setup an instan  for the  camera"""
4              self.timestamp=datetime.now().strftime("%Y-%m
                  -%d_%H-%M-%S")
5              self.fname ='/home/mistaherd/Documents/Github
                  /meshnetwork_in_forest/Images_camera/{}.
                  png'.format(self.timestamp)
6              self.camera=Picamera2()
7              self.camera_config=self.camera.
                  create_preview_configuration()
8              self.timeamount=2
```

3. make the function for takeing a picture

```
1          def take_pic(self)-> str:
2              """this will take  a picture from camera"""
3              self.camera.configure(self.camera_config)
4              self.camera.start_preview(Preview.QTGL)
5              self.camera.start()
6              sleep(self.timeamount)
7              self.camera.capture_file(self.fname)
8              return self.fname
```

3.5.3 Memory Management

For this we want to read data and append and check it the memory size.Here are the following steps:

1. import the following libraries:

```
1          #!/home/mistaherd/Documents/Github/
              meshnetwork_in_forest/env/lib/python3.11
2          import pandas as pd
3          from DHT22 import DHT22
4          from AS312 import AS312
5          from DFR0026 import DFR0026
6          import glob
7          import re
8          import subprocess
```

2. define our class senors

```
1      class sensor_data:
2          def __init__(self):
3              self.dht22 = DHT22()
4              self.humidity,self.temperature=self.dht22.
                  Read_DHT22_data()
5              self.AS312=AS312(17)
6              self.motion_detected =AS312.read_state()
7              self.DF0026 =DFR0026()
8              self.light_value=self.DF0026.Read_data()
9              self.fname="sensor_data.csv"
```

3. We write and append our data to the csv file

```
1          def write_append_csv(self):
2              data = { "Timestamp" : self.timestamp,
3                       "Temperature(oc)" : self.
                          Temperature,
4                       "Humidity(%)" : self.humidity,
5                       "Light(lux)" :self.light_value,
6                       "Motion␣Detected": self.
                          motion_detected
7                     }
8              df = pd.DataFrame(data)
9              if glob.glob(self.fname):
10                     df.to_csv(self.fname,mode='a' ,
                          index=False,header=False)
11             else:
12                     df.to_csv(self.fname,mode='w' ,
                          index=False)
```

4. Next we define our variables for testing memory

```
1    class Memory_tester():
2        def __init__(self):
3            self.units={"K":10e3,"M": 10e6,"G":10e9}
4            self.regex ="\d{4}\.\[0-9]{1,3}[K,M,G]"
5            self.fname="../bash_scrpits/memorytest.sh"
6            self.output_bash=subprocess.check_output(["
                 bash",self.fname],universal_newlines=True)
```

5. next we check our memory

```
1        def check_memory(self):
2            try:
3                if re.search(self.regex,self.output_bash)
                     :
4                    value,unit=match.group(0).split()
5                    try:
6                        return float(value)*self.units[
                             unit]
7                    except KeyError:
8                        raise ValueError(f"unknown unit: 
                             {unit}")
9
10            except subprocess.CalledProcessError as e:
11                raise ValueError(f"Error running script:{
                     e.output}")
```

6. we then make an error if its useing 20 percent memory

```
1        def error_check(self):
2            mem=self.check_memory()
3            max=32*10e9
4            if mem >= 0.2* max:
5                raise MemoryError("memory on pi is about 
                     to  used up")
```

7. to make sure our class run from another python file

```
1        if __name__=="__main__":
2            sensor_data()
3            Memory_tester()
```

The following is the process of devlop:

- To make test that will be there for the codeing section of the project

this section will discuss the following for testing:

1. 1 x DHT22

2. 1 x DFR0026

3. 1 x AS312

4. 1 x SB Components LoRa HAT for Raspberry Pi

5. 1 x MCP3008

6. 1 x Raspberry Pi VR 220 Camera

7. 1 x Li-polymer Battery HAT

DHT22

According to the data sheet (4) seen as the data is 8 bits and the range at which this operates at -40 to 80^{o}c for tempeature meaning we have at least 7 bit in the exponent to represent the measured value. to represent the high end of this sensor i used the following calculation:

$$2^6 + 2^4 = 80$$

which mean we have a 2 bits dedicated to decimal place so the high temperature to be 80.3^{o}c for the lowest temp we have 6 bits to represent - 40 due to 2s complement so lowest will be -40.3^oC so with that that stablish we must make a unit that will do the following:

1. Test if the output is a float

2. Test the high end of the temp sensor so it reads 80.3 as the highest

3. Test for the lowest temp around

be sure to follow steps for folder setup follow instructions on page **??**. we get the following sample code:

Listing 3.1: sample test intial code

```
import unittest
from protest import Read_DHT22
class test_project_code(unittest.TestCase):
    def test_DHT_22_temp_output_type(self):
        self.assertIsInstance(Read_DHT22, float)
    def test_DHT22_temp_range(self):
        self.assertGreaterEqual(Read_DHT22,-30.3)
        self.assertLessEqual(Read_DHT22,80.3)
```

This code import unitest . the from protest is a python files we can install functions from other python files this can be usefull for testing purposes then we initalized a test class call Unittest.testcase our firstion fucntion of the class we check if the number of the output is a float or not this is for testing tempearture the next function we test for is the range i look at the datasheet online this code is simpley testing the limits of the DHT22 for humidity the Datasheet which ranges from 0 to 100 % we want to test for the following:

1. Test if the output is a float

2. Test if the output ranges 0 to 100

this lead to the following code

Listing 3.2: sample test for DHT22

```python
import unittest
from protest import Read_DHT22
class test_project_code(unittest.TestCase):
    hum,temp=Read_DHT22(2)
    def test_DHT22_output_type(self):
        self.assertIsInstance(Read_DHT22,tuple)
    #....

    def test_DHT22_hum_output_type(self):
        self.assertIsInstance(hum,float)

    def test_DHT22_hum_range(self):
        self.assertGreaterEqual(hum,0.0)
        self.assertLessEqual(hum,100.0)
```

seen as we expect our sensor to print out a humdity and temp values we set the output to a tuple to test for this we use isInstacne which will test if its a tuple next we test for the limits of the humidity

DFR0026 & MCP3008

According to the datasheet (9) we must keep in mind that this componet is connected to an ADC this will give me the following test conditions:

1. Test if the output is a float

2. Test the range of this with the upper limit being 5v

3. test the lover limit being 0

Listing 3.3: unit test for DFR0026 and MCP3008

```python
import unittest
from protest import Read_DHT22,Read_MCP3008
class test_project_code(unittest.TestCase):
def test_DFR0026_MCP3008_out_type(self):
    self.assertIsInstance(Read_MCP3008,float)
def test_DFR0026_MCP3008_out_range(self):
    self.assertLessEqual(5.0000000)
    self.assertGreaterEqual(0.0000000)
```

this code is in the same in theres of limits

40

AS312

for this section we want our tests to be the following:

1. test for type is boolean

we can now add to the snipppet :

Listing 3.4: unit test for AS312

```
1    def test_AS312_out_type ( self ):
2        self . assertIsInstance ( Read_AS312 , bool )
```

Note : Don't forget to import read$_a$s12 $function from test file seen as thhis is a motion sensor our ouout$

Raspberry Pi VR 220 Camera

according to the data sheet (22) we the resoultion to it uses is 1080p50 which is 1920x1080p so our tests will have to in copoarte the followoing:

1. Test the output shape if open cv is gonna be used

   (a) test the amout of elelecelm in the 3 dimesional array

2. test the file type is png

this would lead me to the following code snippet.

Listing 3.5: camera unit test

```
1    def test_Raspberry_Pi_VR220_out_shape ( self ):
2    self . assertEqual ( Read_Raspberry_PiVR220 . shape
         ,(1920 ,1080 ,3))
```

this function check the pixeal count or resoulkation

Li-polymer Battery HAT

memory moduldes

in this setion will dicuss the following:

1. silicon power 32GB

2. Turbo 1GB

for this i will use useing a bash script(see this on page 22) and what we are doing is testing the size in a certain range for the silicon SD card

1. Turbo 1GB as from above we are import the file at which where our functions live in code frist we import the function

Listing 3.6: si powerd SD snippnet

```
1    import unittest
2    from protest import Read_DHT22,Read_MCP3008,
         Read_AS312,Read_Raspberry_PiVR220,
         Read_Memory_module
3
4    def Test_memory_module_turbo_1GB_size(self):
5        #testing  turbo 1GB
6        self.assertLessEqual(Read_Memory_module,1e9)
7        self.assertGreaterEqual(Read_Memory_module,0)
```

then simply we call assert and greater than which sets the bounds of the modes the 1e9 is a way to put 110^9 whcih output that will between 1GB and 0

2. silicon power 32GB

MM2 Series 900 MHz

Unit test iterations

the frist iteatarations as see here has the following problems for the sensors:

1. time stamp for DHT22 wasnt in a string format

2. forget to look for but a float and int in the DHT22.read fucntion

conculsion

The intiall draft code for the test devlopemnt si the following on page

3.6   Data Analysis Methods

Statistical and machine learning techniques are employed to analyze the data collected from both computational models and real-world sources. These techniques are used to identify patterns, trends, and relationships within the data.

3.7   Validity and Reliability

Validation of computational models is achieved through rigorous testing and evaluation. This involves comparing model predictions with real-world data and examining the sensitivity of the models to different parameters. Reliability is ensured through the use of standardized methods and procedures for data collection, analysis, and interpretation.

3.8   Limitations and Delimitations

The computational nature of the research introduces limitations due to the complexity of the systems being modeled and the potential for errors in modeling and data analysis. Moreover, the generalizability of the findings may be limited to the specific contexts and conditions considered in the research.

3.9   Timeline

The research phase will be conducted from 20/09/2023 to May 19, 2024.The prosed impanation phase is from january till May 19, 2024

Chapter 4

Results

In thes section we will be showing results for different aspects of this project this will include the following:

1. Recorded data from sensors

2. Recorded data from transceiver

3. Recorded data from testing the mesh network

4.1   Recorded data from sensors

in this section will have tables from the following components:

1. DHT22 **heat and temp**

2. AS312 **Motion**

3. DFR0026 **Light**

4. Raspberry Pi VR 220 **Camera**

4.1.1   DHT22

Results during protypeing

date/time of record	Temperature	Humidity
2024-02-21 00:03:56	22	66

Table 4.1: Recorded data from DHT22 on the May 19, 2024

last we tested if our code satisfies our python code after testing the unit test code we upadated see the foolwing message

Figure 4.1: unit test message for DHT22 module

4.1.2 AS312

Results during protype

date/time of record	motion detected(yes/no)
2024-03-25$_1$5 − 02 − 57	False
2024-03-25$_1$5 − 04 − 37	True
2024-05-03$_1$8 − 07 − 51	False
2024-05-03$_1$8 − 18 − 37	True

Table 4.2: Recorded data from AS312 on the May 19, 2024

4.1.3 DFR0026

Results during protypes

for our first test we got the following table

Date/time of record	lux values(lux)
2024-03-25$_1$5 − 02 − 57	940
2024-03-25$_1$5 − 03 − 13	945
2024-03-25$_1$5 − 04 − 37	4963
2024-05-03$_1$8 − 54 − 57	1284 height

Table 4.3: Recorded data from DFR0026 on the 25th of march 2024

4.1.4 Raspberry Pi VR 220

When testing the Raspberry Pi VR 220

Results during portotypeing
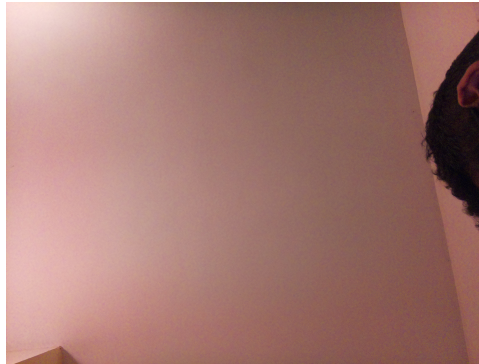
Figure 4.2: A photo from 25th of march 2024

4.2 Recorded data from transceiver

when tessting the radio module the follow was tested:

1. Sending a message across the serial

   heading

2. Sending a txt file across the serial

   heading

3. Sending a csv file across the serial

   heading

4. Sending a image file across the serial

   heading

Chapter 5

Conclusion & Future Work

Bibliography

[1] ITU, "Recommendation itu-r p.833-4"$_,^{''}recommendationITU-RP.833-7_,$, 2012.

[2] m. Eirrean, "Weather extreme records for ireland."

[3] m. eirrean, "Dublin 1920-2010 humidty aveages."

[4] sparkfun.

[5] wiki, "Lux," Oct 2023.

[6]

[7] micros.

[8] freewave.

[9] ada.

[10] RS.

[11] N. D. S. A. V. E. Savage, N. and J. Austin, "Radio wave propagation through vegetation: Factors influencing signal attenuation,," $_RadioSci._,38,1088,2003.$

[12] R. Sabetahd, S. A. Mousavi Ghasemi, R. Vafaei Poursorkhabi, A. Mohammadzadeh, and Y. Zandi, "Response attenuation of a structure equipped with atmd under seismic excitations using methods of online simple adaptive controller and online adaptive type-2 neural-fuzzy controller," *Computational Intelligence and Neuroscience*, vol. 2022, p. 1–25, 2022.

[13] P. Lunkenheimer, S. Emmert, R. Gulich, M. Köhler, M. Wolf, M. Schwab, and A.Loid, "Electromagnetic-radiation absorption of wate," tech. rep., Experimental Physics V, Center for Electronic Correlations and Magnetism, University of Augsburg, 86159 Augsburg, German, ?

[14] H. Chen, F. Xing, Q. Yang, Y. Shu, Z. Shi, J. Chen, and Z. Tao, "A lightweight mobile-anchor-based multi-target outdoor localization scheme using lora communication," *IEEE Transactions on Green Communications and Networking*, vol. 7, no. 4, pp. 1607–1619, 2023.

[15] V. Gavra, O. A. Pop, and I. Dobra, "A comprehensive analysis: Evaluating security characteristics of xbee devices against zigbee protocol," *Sensors*, vol. 23, no. 21, p. 8736, 2023.

[16] M. Zhao, R.-J. Ye, S.-T. Chen, Y.-C. Chen, and Z.-Y. Chen, "Realization of forest internet of things using wireless network communication technology of low-power wide-area network," *Sensors*, vol. 23, no. 10, 2023.

[17] Y. C. Daniel, "Modeling of radiowave propagation in a forested environment," tech. rep., NAVAL POSTGRADUATESCHOOL MONTEREY, CALIFORNIA, 2014.

[18] a. E. Ferreira and F. Ortiz, "A study of the lora signal propagation in forest, urban, and suburban environment"$tech.rep., Institut national de recherche en science set$, 2020.

[19] D. Wu and J. Liebeherr, "A low-cost low-power lora mesh network for large-scale environmental sensing," *IEEE Internet of Things Journal*, vol. 10, p. 16700–16714, Oct 2023.

[20] F. . 2003 and A. C. Information, "An introduction to spread-spectrum communications," Jan 2023.

[21] c. flare, "What is a computer port? — ports in networking — cloudflare."

[22]

Appendix A

Appendix

Appendix B

Python Scripts

B.1 Python Scripts

B.1.1 DHT22

Listing B.1: DHT22code

```python
#!/home/mistaherd/Documents/Github/meshnetwork_in_forest/env/
    lib/python3.11
import adafruit_dht
import board
import datetime
import pandas as pd
class DHT22:
##Set DATA pin to pin 4
    def __init__(self):
        # self.dhtDevice =adafruit_dht.DHT22(board.D4)
        self.dhtDevice =adafruit_dht.DHT11(board.D4)
    def Read_DHT22_data(self)-> tuple[float,float,str]:
        try:
            Humidity=self.dhtDevice.humidity
            Temperature=self.dhtDevice.temperature
            timestamp =datetime.datetime.now()
            timestamp = timestamp.strftime("%Y-%m-%d %H:%M:%S
                ")
            return Temperature,Humidity,timestamp
        except RuntimeError as e:
            print(f"Error reading sensor: {e}")
            return None, None
    def write_to_csv(self,filename:str):
        temperature, humidity, timestamp = self.
            Read_DHT22_data()
        if temperature is not None and humidity is not None
            and timestamp is not None:
            data = [(temperature, humidity, timestamp)]
            df = pd.DataFrame(data, columns=['Temperature', '
                Humidity', 'Timestamp'])
            df.to_csv(filename, index=False)
        else:
```

```
28                    print("Failed␣to␣retrieve␣data␣from␣sensor.␣Data␣
                          not␣written␣to␣CSV.")
29   dht_sensor = DHT22()
30   dht_sensor.write_to_csv("sensor_data.csv")
```

B.1.2   AS312

Listing B.2: code for AS312

```
#!/home/mistaherd/Documents/Github/meshnetwork_in_forest/env/
    lib/python3.11
import RPi.GPIO as GPIO
import time
import datetime
import pandas as pd
#pin 17
class AS312:
        def __init__(self,pin_number:int):
                self.pin_number=pin_number
                self.GPIO=GPIO
                self.GPIO.setmode(GPIO.BCM)
                self.GPIO.setup(self.pin_number,GPIO.IN)
                self.current_state=0
                self.timestamp=datetime.datetime.now().
                    strftime("%Y-%m-%d %H:%M:%S")
        def read_state(self)->int:
                self.current_state =self.GPIO.input(self.
                    pin_number)
                return self.current_state
        def append_data(self):
                data={
                        "Motion Dectected": [self.
                            current_state],
                        "Timestamp": [self.timestamp]
                }
                df =pd.DataFrame(data)
                df.to_csv('sensor_data.csv',mode='a' ,index=
                    False,header=False)
pir_sensor = AS312(17)
try:
        time.sleep(0.1)
        current_state =pir_sensor.read_state()
        timestamp=pir_sensor.timestamp
        print("GPIO pin %s is %s" % (pir_sensor.pin_number,
            current_state))
        if current_state == 1:
                print("Motion dectected")
        pir_sensor.append_data()
except KeyboardInterrupt:
        pass
finally:
        GPIO.cleanup()
```

B.1.3 DFR0026

Listing B.3: Code for DFR00026

```python
#!/home/mistaherd/Documents/Github/meshnetwork_in_forest/env/
    lib/python3.11
from DFRobot_ADS1115 import ADS1115
import time
class DFR0026():
    def __init__(self):
        self.ADS1115_REG_CONFIG_PGA_6_144V        = 0x00 #
            6.144V range = Gain 2/3
        self.ADS1115_REG_CONFIG_PGA_4_096V      = 0x02 #
            4.096V range = Gain 1
        self.ADS1115_REG_CONFIG_PGA_2_048V      = 0x04 #
            2.048V range = Gain 2 (default)
        self.ADS1115_REG_CONFIG_PGA_1_024V      = 0x06 #
            1.024V range = Gain 4
        self.ADS1115_REG_CONFIG_PGA_0_512V      = 0x08 #
            0.512V range = Gain 8
        self.ADS1115_REG_CONFIG_PGA_0_256V      = 0x0A #
            0.256V range = Gain 16
        self.ads1115 = ADS1115()
        self.ads1115.set_addr_ADS1115(0x48)
        self.ads1115.set_gain(self.
            ADS1115_REG_CONFIG_PGA_6_144V)
        self.adc_channel=0
    def read_voltage(self):
        return self.ads1115.read_voltage(self.adc_channel)
        #time.sleep(0.2) after read it
light_vaule=DFR0026()
print(light_vaule.read_voltage())
```

B.1.4 Camera

Listing B.4: Code for Camera

```python
#!/home/mistaherd/Documents/Github/meshnetwork_in_forest/env/
    lib/python3.11
from picamera import PiCamera
from time import sleep
from datetime import datetime
class Raspberry_Pi_VR_220:
    def __init__(self):
        """setup an instan  for the  camera"""
        self.timestamp=datetime.now().strftime("%Y-%m-%d_%H:%
            M:%S")
        self.fname ='/home/mistaherd/Documents/Github/
            meshnetwork_in_forest/{}.png'.format(self.
            timestamp)
        self.camera=PiCamera()
        self.timeamount=2
    def take_pic(self)-> str:
        """this will take  a picture from camera"""
        self.camera.start_preview()
        sleep(self.timeamount)
        self.camera.capture(self.fname)
        self.stop_preview()
        return self.fname
camera=Raspberry_Pi_VR_220()
picture=camera.take_pic()
```

Camera alt

Listing B.5: Code for alternaive code for Camera

```
1    #!/home/mistaherd/Documents/Github/
        meshnetwork_in_forest/env/lib/python3.11
2    import subprocess
3    class camera:
4            def __init__(self):
5                    self.run=subprocess.run(["bash","/
                        home/mistaherd/Documents/Github/
                        meshnetwork_in_forest/bash_scrpits
                        /camerea.sh"])
6    if __name__=="__main__":
7            camera()
```

B.1.5 Memory management

Listing B.6: Code for memory mangement

```
1  #!/home/mistaherd/Documents/Github/meshnetwork_in_forest/env/
       lib/python3.11
2  import pandas as pd
3  from DHT22 import DHT22
4  from AS312 import AS312
5  from MCP3008 import DF0026
6  import glob
7  import re
8  import subprocess
9  class sensor_data:
10         def __init__(self):
11                 self.dht22 = DHT22()
12                 self.humidity,self.temperature,self.timestamp
                       =self.dht22.Read_DHT22_data()
13                 self.AS312=AS312(17)
14                 self.motion_dected =AS312.read_state()
15                 self.DF0026 =DF0026()
16                 self.light_value=self.DF0026.Read_data()
17                 self.fname="sensor_data.csv"
18         def write_append_csv(self):
19                 data = { "Timestamp" : self.timestamp,
20                         "Temperature(oc)" : self.Temperature,
21                         "Humidity(%)" : self.humidity,
22                         "Light(lux)" :self.light_value,
23                         "Motion␣Dected": self.motion_dected
24                         }
25                 df = pd.DataFrame(data)
26                 if glob.glob(self.fname):
27                         df.to_csv(self.fname,mode='a' ,index=
                               False,header=False)
28                 else:
29                         df.to_csv(self.fname,mode='w' ,index=
                               False)
30 class Memory_tester():
31         def __init__(self):
32                 self.units={"K":10e3,"M": 10e6,"G":10e9}
33                 self.regex ="\d{4}\.\[0-9]{1,3}[K,M,G]"
34                 self.fname="../bash_scrpits/memorytest.sh"
35                 self.output_bash=subprocess.check_output(["
                       bash",self.fname],universal_newlines=True)
36         def check_memory(self):
37                 try:
38                         if re.search(self.regex,self.
                               output_bash):
39                                 value,unit=match.group(0).
                                       split()
40                                 try:
```

```python
                            return float(value)*
                                self.units[unit]
                    except KeyError:
                        raise ValueError(f"
                            unknown␣unit:␣{
                            unit}")

            except subprocess.CalledProcessError as e:
                raise ValueError(f"Error␣running␣
                    script:{e.output}")
    def error_check(self):
        mem=self.check_memory()
        max=32*10e9
        if mem >= 0.2* max:
            raise MemoryError("memory␣on␣pi␣is␣
                about␣to␣␣used␣up")
```

B.1.6   Radio module

Listing B.7: Code for Radio module

```python
        #!/home/mistaherd/Documents/Github/
            meshnetwork_in_forest/env/lib/python3.11
        import time
        import serial
        import pandas as pd
        import numpy as np
        import threading
        import subprocess
        import base64
        from memory_mangment import sensor_data
        class Transciever:
                def __init__(self):
                        self.transceive_ser=serial.Serial(
                            port='/dev/ttyS0',baudrate=9600,
                            parity=serial.PARITY_NONE,stopbits
                            =serial.STOPBITS_ONE,bytesize=
                            serial.EIGHTBITS,timeout=1)
                        self.message="Hello␣world!"
                        self.chunk_size=240
                        self.txt_fname="/home/mistaherd/
                            Documents/Github/
                            meshnetwork_in_forest/Tests/
                            transmited_text.txt"
                        self.csv_fname=sensor_data().fname
                        self.timelimit=time.time()+6
                        self.recived=self.transceive_ser.
                            in_waiting
                        self.event=threading.Event()
                def serial_interrupt(self):
                        if self.recived:
```

```python
22                              self.event.set()
23              def cal_bytes(self)-> int:
24                      return len([bytes(self.data[i],'utf-8
                            ').hex() for i in range(len(self.
                            data))])
25
26              # hello world
27              def transceive_test_message(self,transceive:
                    bool):
28                      """send /recive a hello world"""
29                      if transceive:
30                              # self.message
31                              #transmite
32                              self.transceive_ser.write(
                                    bytes(self.message,'utf-8'
                                    ))
33                              time.sleep(0.2)
34                      if not transceive:
35                              while time.time()< self.
                                    reive_timelimit:
36                                      self.transceive_ser.
                                            attachInterrupt(
                                            self.
                                            serial_interrupt)
37                                      if self.event.is_set
                                            ():
38                                              data_read=
                                                    self.
                                                    transceive_ser
                                                    .readline
                                                    ()
39                                              data=
                                                    data_read.
                                                    decode("
                                                    utf-8")
40                                              print("
                                                    message
                                                    received:"
                                                    ,data)
41                                              self.event.
                                                    clear()
42              # Text file
43              def transceive_test_txt_file(self,transceive:
                    bool):
44                      """send /revive a txt file"""
45                      if transceive:
46                              with open(self.txt_fname,'r')
                                    as f:
47                                      data=f.read()
48
```

```python
                                        self.transceive_ser.write(
                                            bytes(data,'utf-8'))
                                        time.sleep(0.2)
                        if not transceive:
                                while time.time()< self.
                                    timelimit:
                                        self.transceive_ser.
                                            attachInterrupt(
                                            self.
                                            serial_interrupt)
                                        if self.event.is_set
                                            ():
                                                data_read=
                                                    self.
                                                    transceive_ser
                                                    .readline
                                                    ()
                                                data=
                                                    data_read.
                                                    decode("
                                                    utf-8")
                                                print(data)
                #test csv file
                def transceive_test_csv(self,transceive:bool)
                    :
                        if transceive:
                                with open('/home/mistaherd/
                                    Documents/Github/
                                    meshnetwork_in_forest/main
                                    /sensor_data.csv','r') as
                                    f:
                                        data=f.readlines()
                                data=''.join(data)
                                lora.write(bytes(data,'utf-8'
                                    ))
                                time.sleep(0.2)
                        if not transceive:
                                while time.time() <self.
                                    timelimit:
                                        self.transceive_ser.
                                            attachInterrupt(
                                            self.
                                            serial_interrupt)
                                        if self.event.is_set
                                            ():
                                                data=self.
                                                    transceive_ser
                                                    .readlines
                                                    ()
                                                output=[data[
                                                    i].decode
```

```python
                                                    () [: -1].
                                                    split(",")
                                                     for i in
                                                    range(len(
                                                    data))]
72                                          df=pd.
                                                    DataFrame(
                                                    output)
73                                          print(df)

74
75              #Test png,jpg
76              def Transcevie_png_file(self):
77                      """Transmit a PNG file"""
78                      if transceive:
79                              with open(self.png_fname, 'rb
                                    ') as f:
80                                      data = f.read()
81                              chunks=[data[i:i+self.
                                    chunk_size] for i in range
                                    (0,len(data),self.
                                    chunk_size)]
82                              for chunk in range(len(chunks
                                    )):
83                                      encoded_chunk=base64.
                                            b64encode(chunk)
84                                      self.transceive_ser.
                                            write(
                                            encoded_chunk)
85                      if not transceive:
86                              output=[]
87                              self.transceive_ser.
                                    attachInterrupt(self.
                                    serial_interrupt)
88                              if self.event.is_set():
89                                      while(self.
                                            transceive_ser.
                                            read() != b''):
90                                              data_read =
                                                    self.
                                                    transceive_ser
                                                    .read()
91                                              print("bytes
                                                    reviced %a
                                                    "%
                                                    data_read)
92                                              output.append
                                                    (base64.
                                                    b64decode(
                                                    data_read)
                                                    )
```

```python
                                    output=b"".join(
                                        output)
                                    with open("
                                        recived_img.png",
                                        'wb') as f:
                                            f.
                                                write
                                                (
                                                output
                                                )
                def transive_choice(self,arugement):
                        """ run this for demo"""
                        if not self.event.is_set():
                                #transmit something
                                self.transmit=True
                                choice ={
                                        1:lambda :self.
                                            transceive_test_message
                                            (self.transmit),
                                        2:lambda :self.
                                            transceive_test_txt_file
                                            (self.transmite),
                                        3:lambda :self.
                                            transceive_test_csv
                                            (self.transmit),
                                        4:lambda :self.
                                            Transcevie_png_file
                                            (self.transmit)}
                                choice[arugement]()
                        #revived somthing
                        self.transmit=False
                        choice[self.user_message]()
        if __name__=='__main__':
                Transciever()
```

Appendix C

TDD Script

C.1 TDD scripts

This section is for All the TDD section of this report in this section will be shareing the TDD of the following:

1. DHT22

2. AS312

3. DFR0026

4. Raspberry Pi VR 220 Camera

5. silicon power 32GB

6. SB Components LoRa HAT for Raspberry Pi

C.1.1 DHT22

Listing C.1: DHT22 unit test

```python
#!/home/mistaherd/Documents/Github/meshnetwork_in_forest/
    env/lib/python3.11
from DHT22 import DHT22
import unittest
dht22_instance=DHT22()
hum,temp,ts=dht22_instance.Read_DHT22_data()
class test_project_code(unittest.TestCase):
    # DHT22
    def test_DHT22_output_type(self):

        self.assertIsInstance(dht22_instance.
            Read_DHT22_data, tuple)

    def test_DHT_22_temp_output_type(self):
        self.assertIsInstance(temp, (int,float) )

    def test_DHT22_temp_range(self):
        self.assertGreaterEqual(temp,-30.3)
```

```python
17            self.assertLessEqual(temp,80.3)
18
19        def test_DHT22_hum_output_type(self):
20            self.assertIsInstance(hum,(int,float))
21
22        def test_DHT22_hum_range(self):
23            self.assertGreaterEqual(hum,0.0)
24            self.assertLessEqual(hum,100.0)
25    if __name__ == '__main__':
26        unittest.main()
```

C.1.2 AS312

Listing C.2: Code for unit test of AS312

```python
#!/home/mistaherd/Documents/Github/meshnetwork_in_forest/
    env/lib/python3.11
import unittest
from AS312 import AS312
class test_project_code(unittest.TestCase):
    def test_AS312_out_type(self):
        self.assertIsInstance(AS312_instance.read_state,
            bool)
if __name__ == '__main__':
    unittest.main()
```

C.1.3 DFR0026

```python
#!/home/mistaherd/Documents/Github/meshnetwork_in_forest/
    env/lib/python3.11
import unittest
from DFR0026 import DFR0026
class test_project_code(unittest.TestCase):
    def test_DFR0026_out_type(self):
        self.assertIsInstance(DFR0026().read_voltage(),
            float)
    def test_DFR0026_out_range(self):
        self.assertLessEqual(DFR0026().read_voltage(),5)
        self.assertGreaterEqual(DFR0026().read_voltage()
            ,0)
if __name__ == '__main__':
    unittest.main()
```

C.1.4 Memory Management

Listing C.4: Code for unit test of memory module

```
1   #!/home/mistaherd/Documents/Github/meshnetwork_in_forest/
        env/lib/python3.11
2   import unittest
3   from memory_mangment import sensor_data,Memory_tester
4   memorytest_obj=Memory_tester()
5   class test_project_code(unittest.TestCase):
6       def Test_memory_silicon_power_32GB(self):
7           self.assertLessEqual(memorytest_obj.check_memory
                ,32e9)
8           self.assertGreaterEqual(memorytest_obj.
                check_memory,0)
9
10  if __name__ == '__main__':
11      unittest.main()
```

C.1.5 Radio Module

```python
#!/home/mistaherd/Documents/Github/meshnetwork_in_forest/env/lib/python3
import unittest
from Radiomodule import Transciever
Transciever_instance=Transciever()
class test_project_code(unittest.TestCase):
    def test_serial_connection(self):
        self.assertIsInstance(Transciever_instance.transceive_ser, serial
    def test_serial_interrupt(self):
        self.assertEqual(Transciever_instance.event.is_set(),(False,True
    def test_transceiver_test_message(self):
        message=Transciever_instance.message
        Transciever_instance.transceive_test_message(True)
        received_message=Transciever_instance.transceive_test_message(Fa
        self.assertEqual(message,received_message)
    def test_transceiver_test_txt_file(self):
        txt_fname=Transciever_instance.txt_fname
        with open(txt_file,'r') as f:
            expected_txt=f.read()
        Transciever_instance.transceive_test_txt_file(True)
        received_txt_file=Transciever_instance.transceive_test_txt_file(
        self.assertEqual(expected_txt,received_txt_file)
    def test_transciver_test_csv(self):
        csv_fname=Transciever_instance.csv_fname
        expected_df=pd.read_csv(csv_fname)
        Transciever_instance.transceive_test_csv(True)
        reviced_df=Transciever_instance.transceive_test_csv(False)
        self.assertEqual(expected_df,reviced_df)
    def test_trancsive_img_file(self):
        img_fname=Transciever_instance.png_fname
        with open(img_fname,'rb') as f:
            expted_out=f.read()
        Transciever_instance.Transcevie_png_file(True)
        received_bin=Transciever_instance.Transcevie_png_file(False)
        self.assertEqual(expted_out,received_bin)
```

Appendix D

Bash scripts

D.1 Bashscripts

in this section we will have the following bash files:

1. Camerea

2. main

3. memorytest

4. radiomodule

D.1.1 Camerea

Listing D.1: Code for triggering the camerea

```bash
#!/bin/bash
timestamp=$(date +"%Y-%m-%d_%H_%M_%S")
fname="camera_output_$timestamp.png"
output_dir="Images_camera"
if [ ! -d "$output_dir" ]; then
# Create the directory if it doesn't exist
mkdir -p "$output_dir"
fi
rpicam-still --raw -o "$output_dir/$fname"
```

D.1.2 Main

Listing D.2: Code for runing the main function

```bash
#!/bin/bash
is_root() {
if [[ $EUID -ne 0 ]]; then
    echo "This script requires root privileges. Please
        ↪ run with sudo."
    exit 1
fi
}
if [[ $1 -eq 0 ]]; then
    echo "Error no aruguments provided"
    echo -e "enter what is transmited:\n\r1:hello world \
        ↪ n\r2:text file \n\r3:csv file\n\r4:PNG\n\r"
    exit 1
fi
# Call the is_root function to verify permissions
is_root
sudo chmod g+rw /dev/ttyS0
#get current time
current_time=$(date +%H:%M)
current_hour=$(echo $current_time | cut -d: -f 1)
previous_hour=$((current_hour-1))
while [ $current_time != "12:00" ]&&[ $current_time != "
    ↪ 9:00" ]; do
if [ $current_time == "$current_hour:00" ]; then
    # python Documents/Github/meshnetwork_in_forest/main/
        ↪ main.py $1
    python main/main.py $1
    echo "file ran successfully"
fi
break #because everyone needs a break sometime
done
```

D.1.3 Radio Module

Listing D.3: Code for the testing serial of the radio module

```bash
#!/bin/bash
#only use this  for  transcive module
# Function to check if the script is run with root
    privileges
is_root() {
if [[ $EUID -ne 0 ]]; then
    echo "This script requires root privileges. Please
        run with sudo."
    exit 1
fi
}
# Call the is_root function to verify permissions
is_root
# Set appropriate permissions for /dev/ttyS0 (consider
    group or user access)

sudo chmod g+rw /dev/ttyS0

if [[ "$1" == "1" ]]; then
python test_tranmiter.py
elif [[ "$1" == "0" ]]; then
python test_reciver.py
else
echo "Invalid argument. Please provide 1 (transmitter) or
     0 (receiver)."
exit 1
fi
```