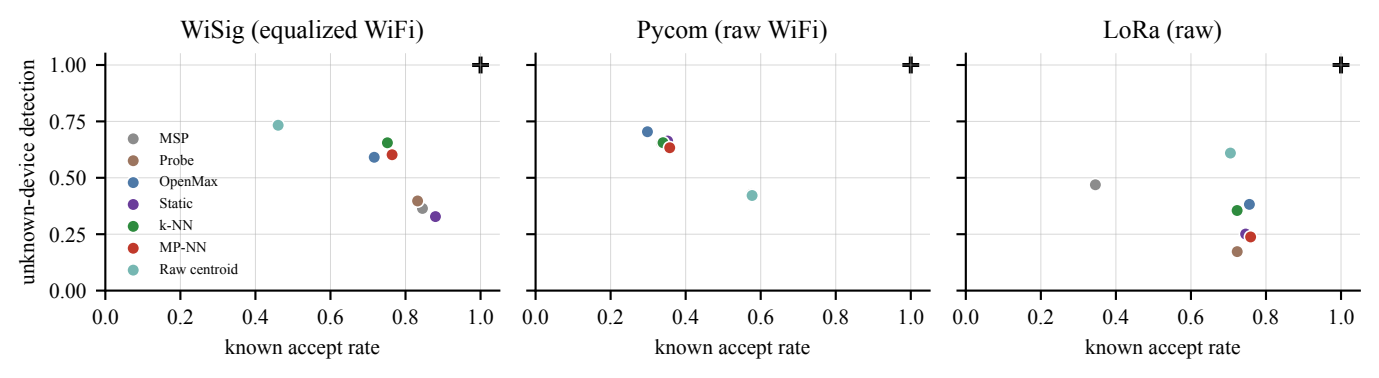
WiSig (equalized WiFi)
Pycom (raw WiFi)
LoRa (raw)
unknown-device detection
known accept rate
MSP
Probe
OpenMax
Static
k-NN
MP-NN
Raw centroid
0.00
0.25
0.50
0.75
1.00
0.0
0.2
0.4
0.6
0.8
1.0