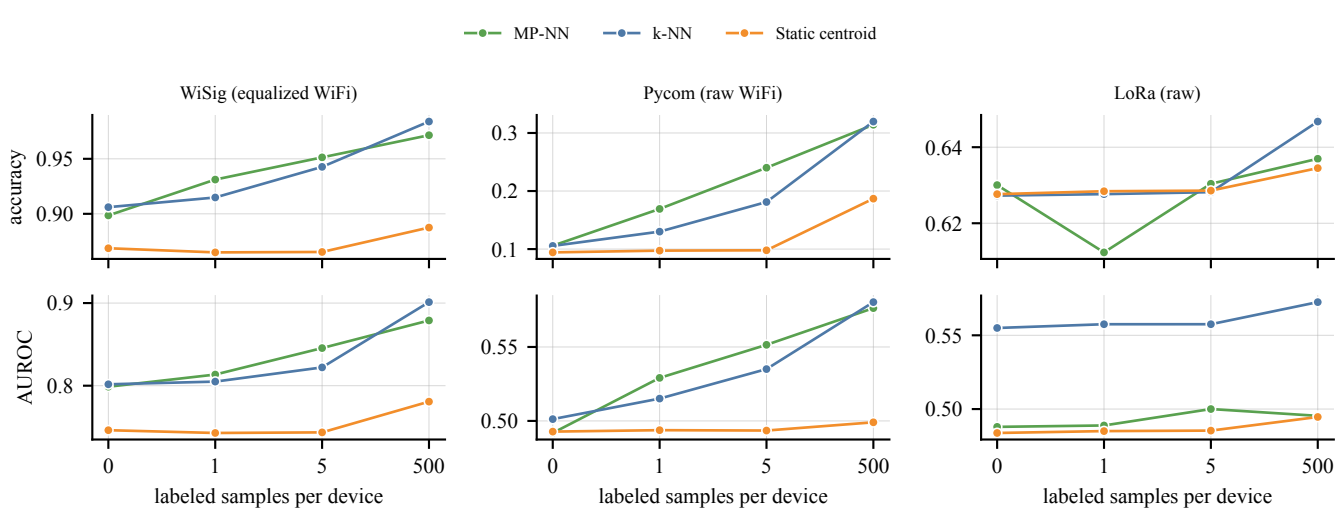
MP-NN
k-NN
Static centroid
WiSig (equalized WiFi)
Pycom (raw WiFi)
LoRa (raw)
accuracy
AUROC
0.95
0.90
0.9
0.8
0.3
0.2
0.1
0.55
0.50
0.64
0.62
0
1
5
500
labeled samples per device