



RADIAL LOAD (P1)

AXIAL LOAD (P2)

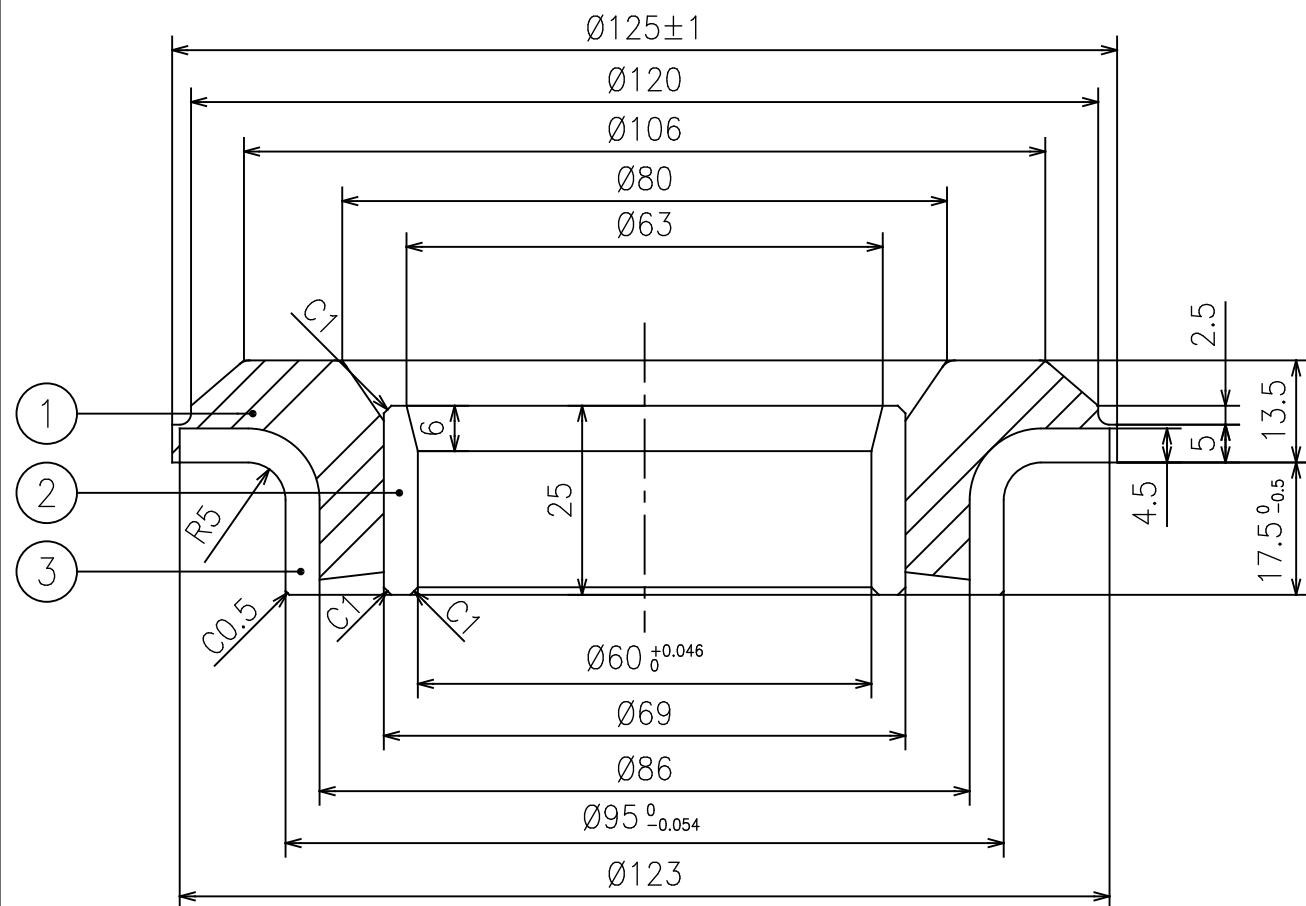

SECTION VIEW

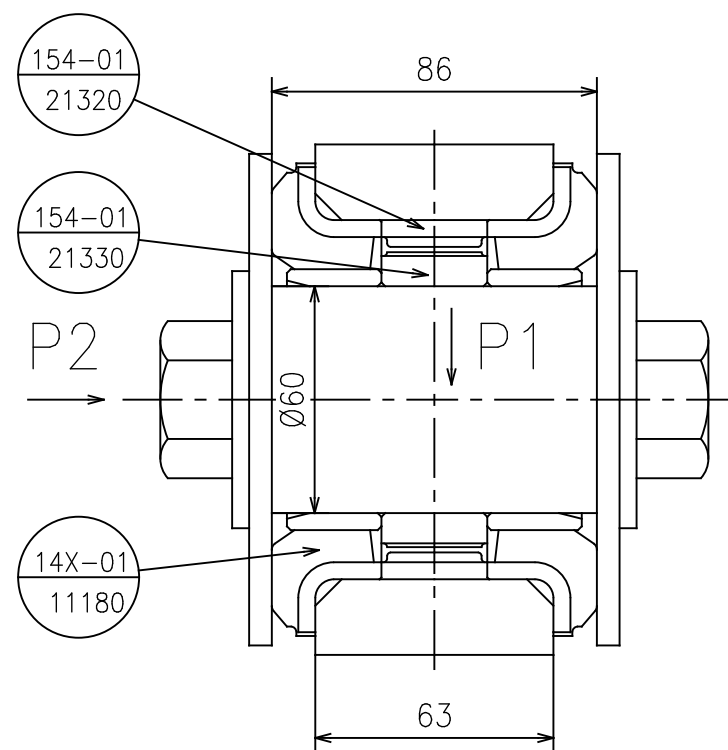

MEASUREMENT METHOD

 $\triangle$ STKM13A

SPECIFICATIONS

1. SPRING CURVE WITHIN THE  ZONE OF CHART AT RIGHT. $K=640 \text{ kg/mm} \pm 15\%$ 2. AFTER DURABILITY TEST BELOW, SPRING CURVE SHALL BE WITHIN THE  ZONE.

RADIAL LOAD P1 650~6500 kg

AXIAL LOAD P1 0~5100 kg

FREQUENCY 1 Hz

NUMBER OF CYCLES 1.2×10^5

3. INNER SLEEVE (2) AND OUTER SLEEVE (3) SHALL BE CHEMICAL CONVERSION COATED.


4. NO DURABILITY PROBLEMS UNDER THE OPERATING CONDITIONS BELOW.

1) EXPOSED TO RAIN AND SUNLIGHT.

2) AMBIENT TEMPERATURE -50°C TO $+80^\circ\text{C}$

5. THIS PART DIFFERS FROM 154-01-21310 IN SPRING CHARACTERISTICS.

THIRD	2	INNER SLEEVE	1	STKM13A						
ANGLE	1	RUBBER	1	NR	T.P.Hs=55 (REF.)	3	OUTER SLEEVE	1	STKM11A	
PROJ.	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS
△4						倉敷化工株式会社 INDUSTRIAL MACHINERY DIVISION				
△3										
△2										
△1	DRAWING CONVERTED TO CAD; MATERIAL CORRECTED			'19.10.03	YOKOBE	TATANO	KOMATSU LTD.			
CODE	REVISION HISTORY / CHANGES			DATE	APPD	REV.				
APPROVED		CHECKED	DRAWN	DATE CREATED		SCALE	CUSHION			
FUJITA		TAKATSUKI	TAKATSUKI	YEAR MONTH DAY '92.03.04		1:1				
							PART NO.	14X-01-11180		



倉敷化工株式会社

INDUSTRIAL MACHINERY DIVISION