


CONFIDENTIAL


MANUFACTURING
DRAWING

IDENTIFICATION (EMBOSSED)
PART NO. "V1311-42151"
SHALL BE EMBOSSED.

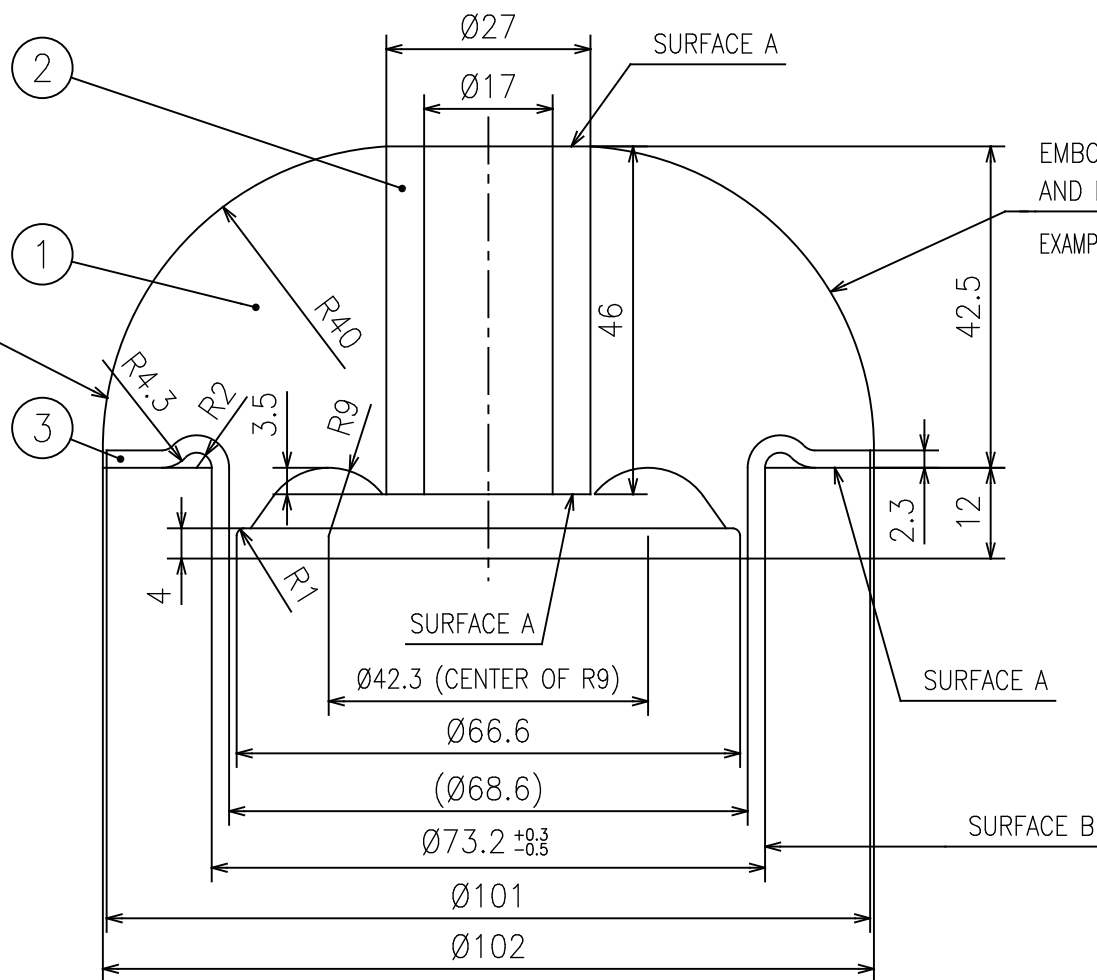

INSTALLED CONDITION (DEFLECTION DUE TO EQUIPMENT LOAD IS NOT CONSIDERED)

EMBOSS THE MANUFACTURER MARK
AND DATE OF MANUFACTURE.
EXAMPLE: AUGUST 2014:

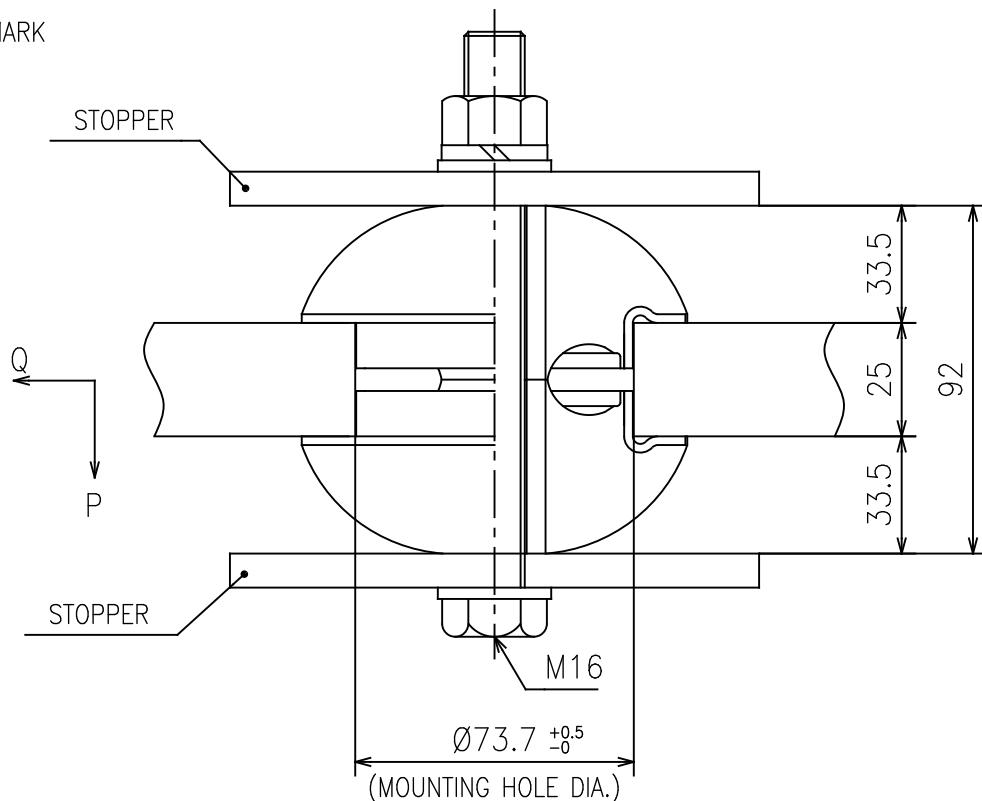

SPECIFICATIONS

1. STATIC SPRING RATE

STATIC SPRING RATE IN P DIRECTION KsP(N/mm)±15%	STATIC SPRING RATE IN Q DIRECTION (REF.) KsQ(N/mm)	MEASUREMENT RANGE		1W (N)	PRELOAD (N)		TEST SPEED (mm/min)	
		P DIRECTION	Q DIRECTION		P DIRECTION	Q DIRECTION	P DIRECTION	Q DIRECTION
851	710	BETWEEN 676 AND 2028 N	BETWEEN 676 AND 1352 N	1352	5408	4056	10	10

MEASURE IN THE INSTALLED CONDITION. (A DISC-TYPE STOPPER IS ACCEPTABLE.)

2. RUBBER MATERIAL: HEAT-RESISTANT NR

3. SURFACE TREATMENT: METAL PRETREATMENT: No. 21

METAL PART SURFACE TREATMENT: BLACK COATING (ACRYLIC WATER-BASED EMULSION PAINT / ASUKA KK)

FILM THICKNESS: 15 µm MIN. / ADHESION TO RUBBER IS ACCEPTABLE, EXCEPT INNER SURFACE OF INNER SLEEVE.

4. DURABILITY: NO HARMFUL DAMAGE AFTER THE FOLLOWING TEST.

DIR.	LOAD CONDITIONS	1W	NUMBER OF CYCLES	FREQUENCY	AMBIENT TEMPERATURE
P	1W±2.5W	SEE TABLE	1x10 ⁶ CYCLES	2Hz	40°C
Q	±2.5W	SEE TABLE	1x10 ⁶ CYCLES	2Hz	40°C

PRESS-BLANKING TOLERANCES	
CLASS C	mm
6 OR LESS	± 0.3
OVER 6 TO 30	± 0.5
OVER 30 TO 120	± 0.8
OVER 120 TO 400	± 1.2
OVER 400 TO 1000	± 2.0
OVER 1000 TO 2000	± 3.0

MACHINING TOLERANCES	
MEDIUM CLASS	mm
0.5 TO 6	± 0.1
OVER 6 TO 30	± 0.2
OVER 30 TO 120	± 0.3
OVER 120 TO 400	± 0.5
OVER 400 TO 1000	± 0.8
OVER 1000 TO 2000	± 1.2

GENERAL RUBBER TOLERANCES	
CLASS B	mm
3 OR LESS	± 0.3
OVER 3 TO 6	± 0.4
OVER 6 TO 10	± 0.5
OVER 10 TO 50	± 1.0
OVER 50 TO 120	± 1.4
OVER 120 TO 250	± 2.0
OVER 250 TO 315	± 2.5
OVER 315 TO 500	± 3.5
500 OR MORE	± 0.8%

NOTES

1. THIS PART DIFFERS FROM V1411-4215A IN STATIC SPRING RATE AND RUBBER SHAPE.

2. SURFACE A (ENTIRE SURFACE) IS A FASTENING SURFACE (SEE INSTALLATION DRAWING); NO RUBBER FLASH IS PERMITTED.
NO LOOSE RUBBER FLASH IS PERMITTED ON SURFACE B (ENTIRE CIRCUMFERENCE).

3. PROTOTYPE PART NO.: V1311-4215B

MASS	0.51 kg
RUBBER VOLUME	232 cm ³

THIRD			△ G1752K T.P.Hs=52 (REF.)	△ G1750K T.P.Hs=50 (REF.)	2	INNER SLEEVE	1	STKM12C	V0511-42151-2		
ANGLE	1	RUBBER	1	HEAT-RES. NR	△ G1752K T.P.Hs=A52 (REF.)	3	PLATE	1	SPHC-P	V0511-42151-3	
PROJ.	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS	
△ 4						倉敷化工株式会社 INDUSTRIAL MACHINERY DIVISION					
△ 3											
△ 2	RUBBER HARDNESS CHANGED			'24.07.18	MIKAI						KAGEYAMA
△ 1	RUBBER HARDNESS CHANGED			'22.10.14	TATANO						KAGEYAMA
CODE	REVISION HISTORY / CHANGES			DATE	APPD						REV.
APPROVED		CHECKED	DRAWN	DATE CREATED		SCALE	NAME	ENGINE MOUNT			
KATO		YOKOBE	TOMIWA	YEAR MONTH DAY '14.08.18		1:1		PART NO.	V1311-42151		