
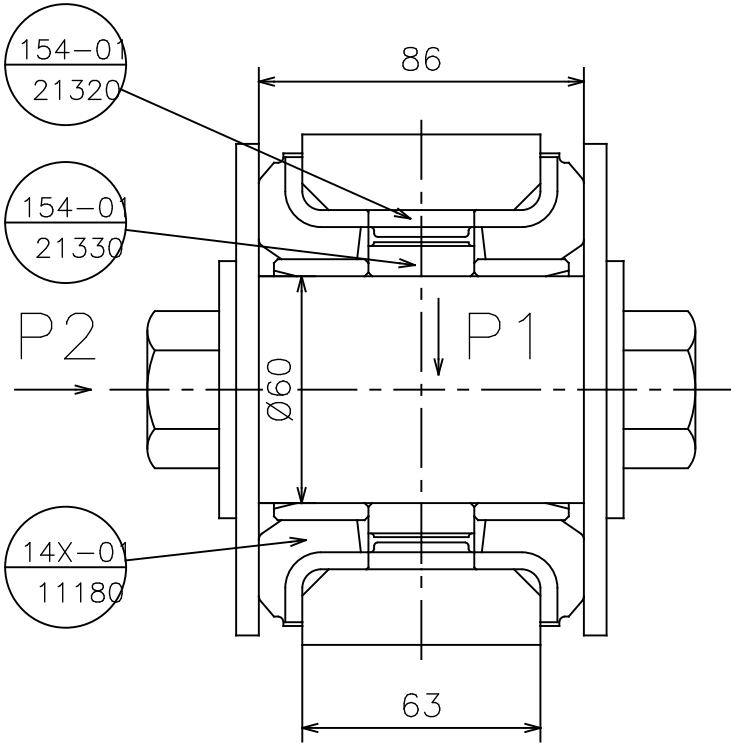


RADIAL LOAD (P1)

AXIAL LOAD (P2)

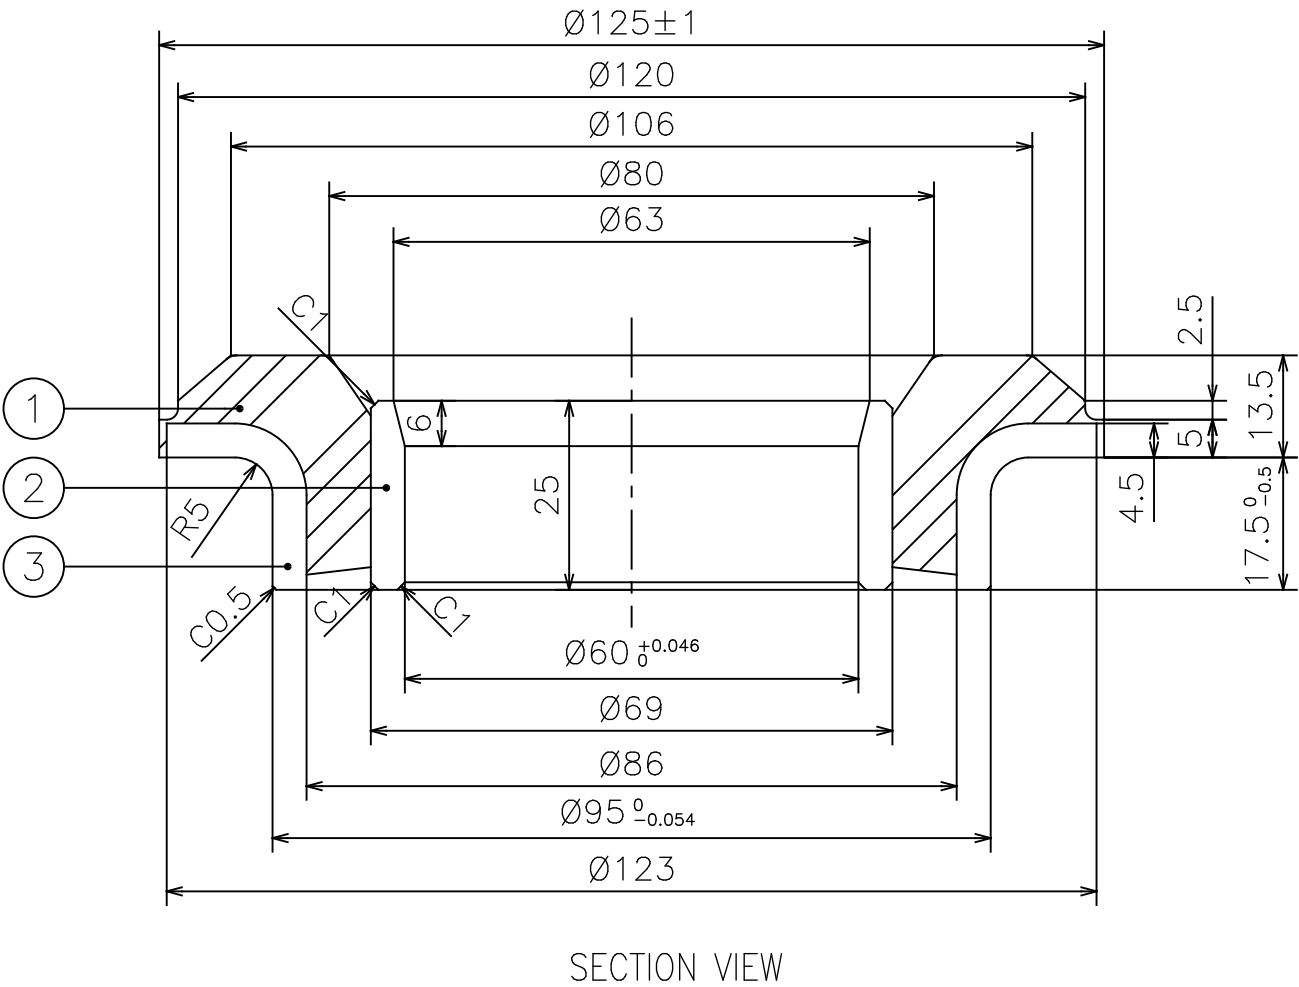

SPECIFICATIONS

1. SPRING CURVE WITHIN THE ZONE OF CHART AT RIGHT. $K=640 \text{ kg/mm} \pm 15\%$
2. AFTER THE DURABILITY TEST BELOW, SPRING CURVE SHALL BE WITHIN THE ZONE.
RADIAL LOAD P1 650~6500 kg
AXIAL LOAD P1 0~5100 kg
FREQUENCY 1 Hz
NUMBER OF CYCLES 1.2×10^5
3. INNER SLEEVE (2) AND OUTER SLEEVE (3) SHALL BE CHEMICAL CONVERSION COATED.
4. NO DURABILITY PROBLEMS UNDER THE OPERATING CONDITIONS BELOW.
1) EXPOSED TO RAIN AND SUNLIGHT.
2) AMBIENT TEMPERATURE -50°C TO $+80^{\circ}\text{C}$
5. THIS PART DIFFERS FROM 154-01-21310 IN SPRING CHARACTERISTICS.

~~STKM13A~~

THIRD	2	INNER SLEEVE	1	STKM13A						
ANGLE	1	RUBBER	1	NR	T.P.Hs=55 (REF.)	3	OUTER SLEEVE	1	STKM11A	
PROJ.	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS
4							 倉敷化工株式会社 INDUSTRIAL MACHINERY DIVISION			
3										
2										
1	DRAWING CONVERTED TO CAD; MATERIAL CORRECTED			'19.10.03	YOKOBE	TATANO				
CODE	REVISION HISTORY / CHANGES			DATE	APPD	REV.	KOMATSU LTD.			
APPROVED		CHECKED	DRAWN	DATE CREATED		SCALE	NAME	CUSHION		
FUJITA		TAKATSUKI	TAKATSUKI	YEAR MONTH DAY '92.03.04		1:1	PART NO.	14X-01-11180		