


35S MAX. 12.5S MAX.

▽ (▽ ▽)

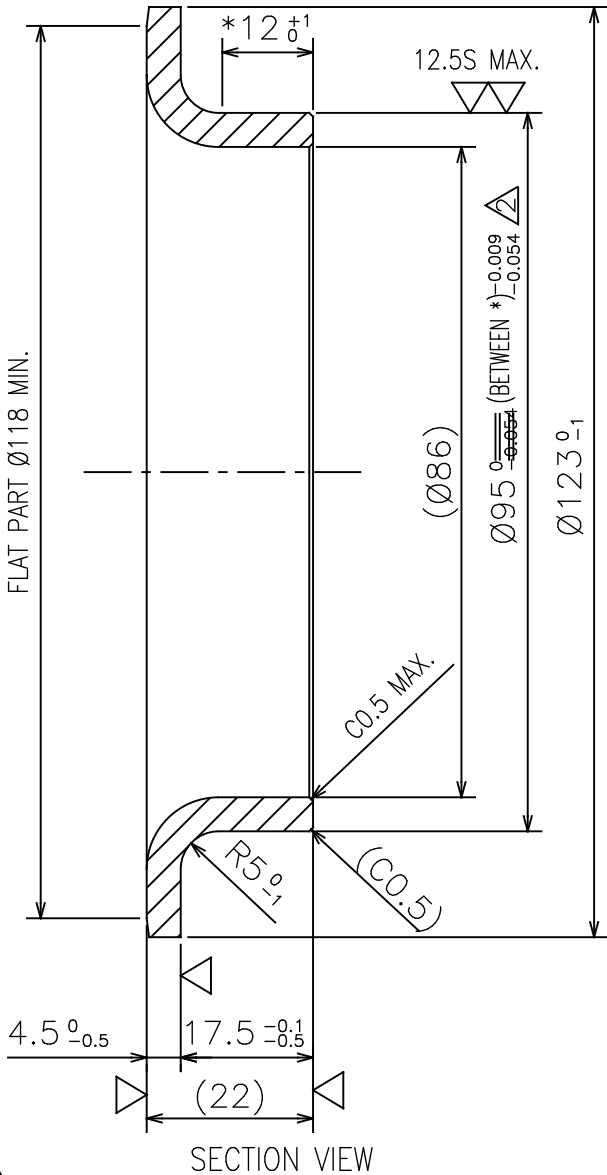

△
~~NO BURRS ON END FACES.~~

△
~~STKM12A / SC~~

△
~~MATERIAL STKM11A E-C SEAMLESS, PICKLED (BRIGHT ANNEALED)~~

△
~~RAW TUBE SIZE Ø96±0.1 x Ø86±0.1 x ~~36±0.1~~~~

39/3
NOTE: NO HARMFUL SCALE (FOR CHEMICAL CONVERSION COATING). △

THIRD										
ANGLE										
PROJ.	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS
△4		DRAWING CONVERTED TO CAD; MATERIAL CORRECTED	'19.10.03	YOKOBE	TATANO	 倉敷化工株式会社INDUSTRIAL MACHINERY DIVISION KOMATSU LTD.				
△3		DIMENSION CHANGED	'16.7.4		KANEDA					
△2		TOLERANCE CHANGED (TO Ø95 ^{+0.009} _{-0.054})	'98.9.11		FUJIWARA					
△1		NOTE ADDED	'19.10.23		TAKATSUKI					
CODE	REVISION HISTORY / CHANGES			DATE	APPD	REV.	NAME			
	APPROVED	CHECKED	DRAWN	DATE CREATED	SCALE		CUSHION OUTER SLEEVE			
	FUJITA	ARIMATSU	HOTO	YEAR MONTH DAY S61.4.11	1:1	PART NO.	154-01-21310-3			