

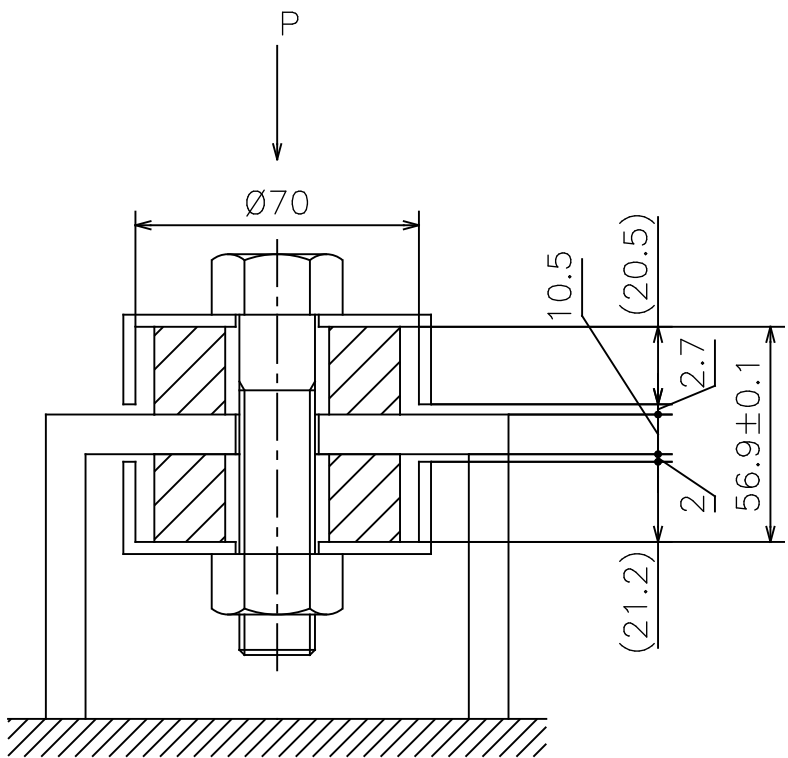


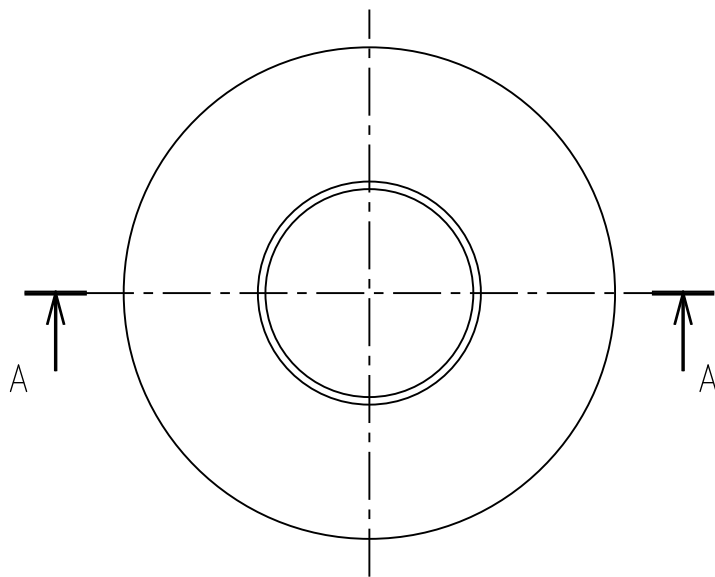

ASSEMBLY METHOD (SCALE: FREE)

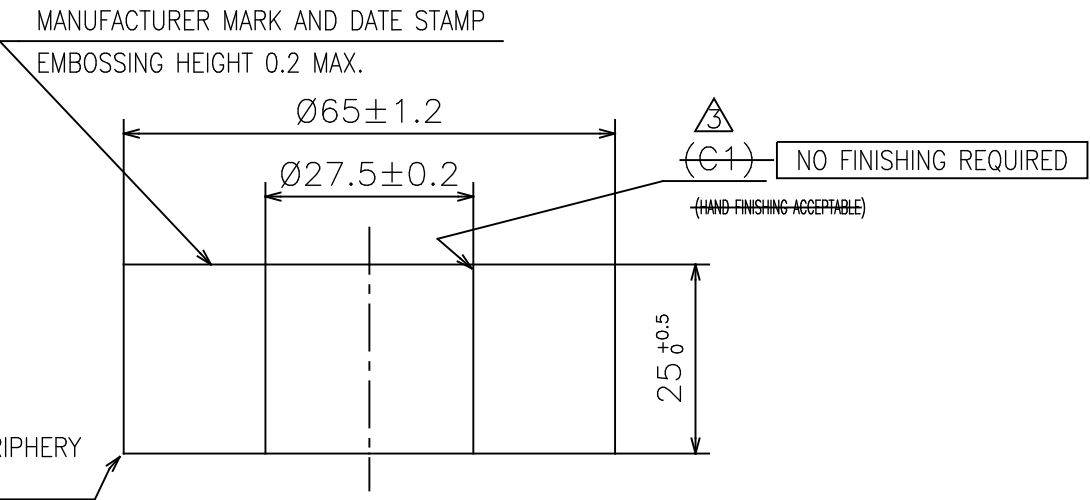

SECTION A-A

SPECIFICATIONS

1. TWO PIECES FORM ONE SET; USE AS ASSEMBLED IN THE FIGURE ON THE LEFT.
COMPRESSION SPRING RATE $K_c=5000\text{ N/mm} \pm 20\%$ (REF.) MEASURING RANGE: 100 TO 4000 N
PRELOAD: 10000 N TEST SPEED: 3 mm/min
2. RUBBER MATERIAL: NR
- △ PRODUCT SURFACE HARDNESS: $H_s=A85 \pm 5$ (REF.)
△ RUBBER TEST PIECE HARDNESS: T.P. $H_s=A80 \pm 3$ (YAMANI IN-HOUSE COMPOUND)

03111543

△	MASS	0.08 kg
	RUBBER VOLUME	68 cm ³

RANK	RUBBER FLASH FINISH HEIGHT	INJECTION HOLE HEIGHT
I	0.5 mm MAX.	HEIGHT: 0.5 mm MAX. NO GOUGES
II	1.0 mm MAX.	HEIGHT: 1.0 mm MAX. NO GOUGES
III	2.0 mm MAX.	HEIGHT: 2.0 mm MAX. NO GOUGES

GENERAL RUBBER TOLERANCES	
CLASS B	mm
3 OR LESS	± 0.3
OVER 3 TO 6	± 0.4
OVER 6 TO 10	± 0.5
OVER 10 TO 50	± 1.0
OVER 50 TO 120	± 1.4
OVER 120 TO 250	± 2.0
OVER 250 TO 315	± 2.5
OVER 315 TO 500	± 3.5
500 OR MORE	± 0.8%

THIRD ANGLE PROJ.	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS		
△4												
△3		NOTE CHANGED (BORE CHAMFER CALLOUT DELETED)		'25.01.10	MIKAI	UCHIYAMA						
△2		MASS, VOLUME, QUALITY RANK ETC. ADDED		'23.07.18	KAGEYAMA	HORII						
△1		RUBBER HARDNESS CONTROL; NEW DRAWING.		'11.10.26	KAGEYAMA	OKAMOTO						
CODE	REVISION HISTORY / CHANGES			DATE	APPD	REV.	 倉敷化工株式会社 INDUSTRIAL MACHINERY DIVISION					
APPROVED		CHECKED	DRAWN	DATE CREATED		SCALE					NAME	CUSHION
KAGEYAMA		HASUI	OKAMOTO	YEAR MONTH DAY '11.10.26		1:1					PART NO.	203-54-21110