

CONFIDENTIAL

MANUFACTURING DRAWING

IDENTIFICATION (EMBOSSING + MARKING)


1 ~~42161~~
EMBOSSING: V1411-42162

MARKING: AROUND THE ENTIRE
CIRCUMFERENCE

COLOR: BLUE; LINE WIDTH:
OPTIONAL

POSITION: OVER THE EMBOSSING
(OVERHANG IS ACCEPTABLE)


LINE DISTORTION, UNEVENNESS,
FADING, AND RUNS ARE
ACCEPTABLE.

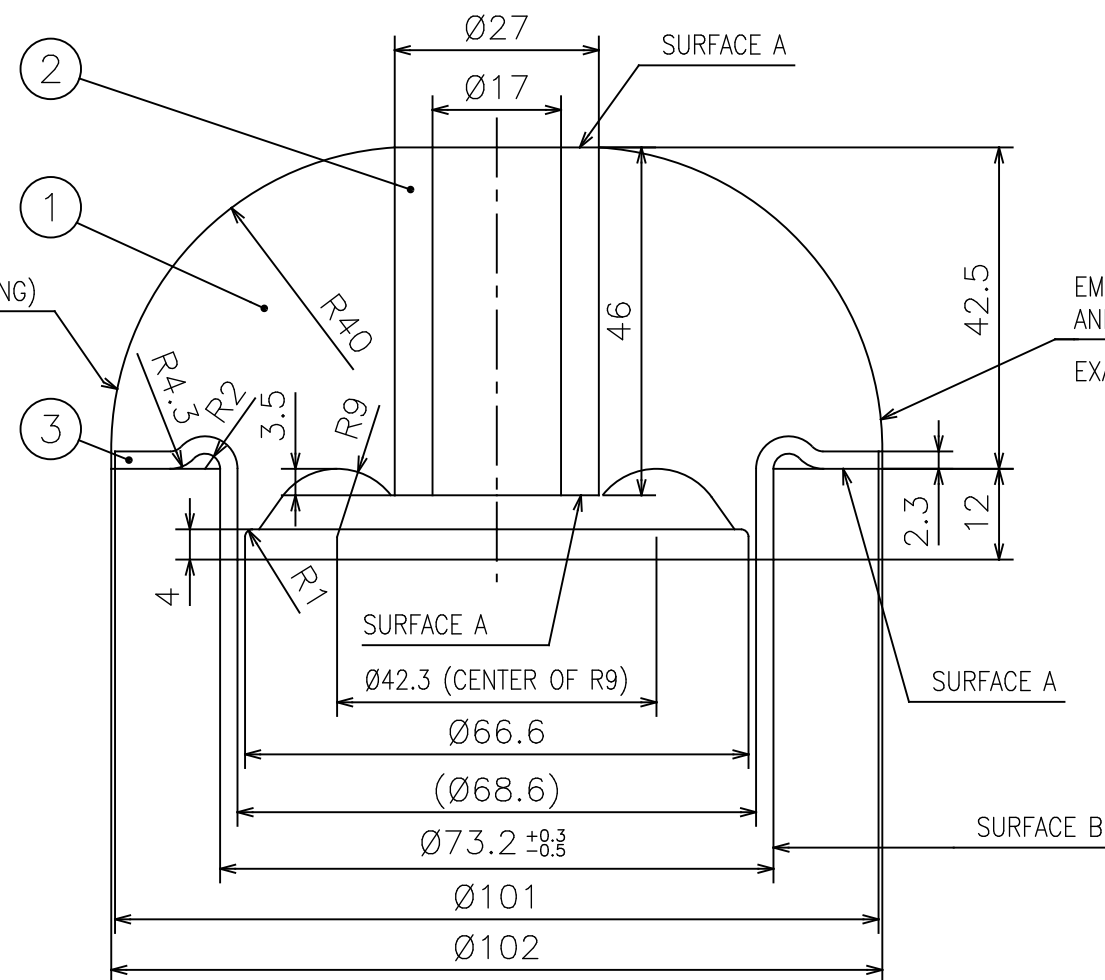

SECTION VIEW

INSTALLED CONDITION

(DEFLECTION DUE TO EQUIPMENT LOAD IS NOT CONSIDERED)

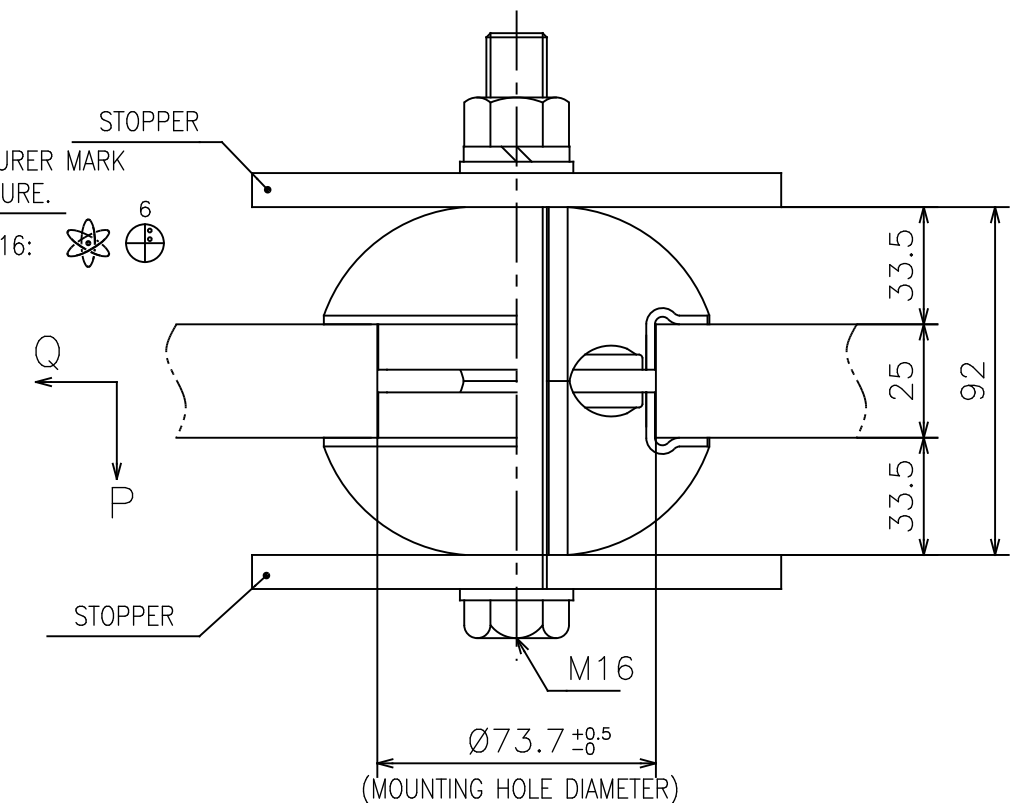

SPECIFICATIONS

1. STATIC SPRING RATE

STATIC SPRING RATE IN P DIRECTION KsP (N/mm) ±15%	STATIC SPRING RATE IN Q DIRECTION (REF.) KsQ (N/mm)	MEASUREMENT RANGE		1W (N)	PRELOAD (N)		TEST SPEED (mm/min)	
		P DIRECTION	Q DIRECTION		P DIR.	Q DIR.	P DIRECTION	Q DIRECTION
1026	850	BETWEEN 809 AND 2427 N	BETWEEN 809 AND 1618 N	1618	6472	4854	10	10

MEASURE IN THE INSTALLED CONDITION. (A DISC-TYPE STOPPER IS ACCEPTABLE.)

2. SURFACE TREATMENT

METAL PRETREATMENT: No. 2 OR 21

METAL PART SURFACE TREATMENT: BLACK COATING (ACRYLIC WATER-BASED EMULSION PAINT / ASUKA KK)

FILM THICKNESS: 15 μ m MIN. / ADHESION TO RUBBER IS ACCEPTABLE.

EXCLUDING THE INNER SURFACE OF THE INNER SLEEVE.

RUBBER VOLUME: 230 cm³

GENERAL RUBBER TOLERANCES	
CLASS B	mm
3 OR LESS	± 0.3
OVER 3 TO 6	± 0.4
OVER 6 TO 10	± 0.5
OVER 10 TO 50	± 1.0
OVER 50 TO 120	± 1.4
OVER 120 TO 250	± 2.0
OVER 250 TO 315	± 2.5
OVER 315 TO 500	± 3.5
500 OR MORE	± 0.8%

NOTES

1. THIS PART DIFFERS FROM V1411-4215A IN STATIC SPRING RATE AND RUBBER SHAPE.
2. THIS PART DIFFERS FROM V1411-42151 AND V1411-4219A IN RUBBER HARDNESS.
- ~~3. THIS PART DIFFERS FROM V1411-42161 IN IDENTIFICATION MARKING.~~
4. SURFACE A (ENTIRE SURFACE) IS A FASTENING SURFACE (SEE INSTALLATION DRAWING);
NO RUBBER FLASH IS PERMITTED.
MARKING RUNS ON SURFACE A (ENTIRE SURFACE) ARE ACCEPTABLE.
NO LOOSE RUBBER FLASH IS PERMITTED ON SURFACE B (ENTIRE CIRCUMFERENCE).

THIRD					G1757K T.P.Hs=57 (REF.)	2	INNER SLEEVE	1	STKM12C	V0511-42151-2
ANGLE	1	RUBBER	1	HEAT-RES. NR	G1756K T.P.Hs=56 (REF.)	3	PLATE	1	SPHC-P	V0511-42151-3
PROJ.	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS	NO.	DESCRIPTION	QTY	MATERIAL	REMARKS
							 倉敷化工株式会社 INDUSTRIAL MACHINERY DIVISION			
										
	RUBBER HARDNESS CHANGED			'18.06.22	KAGEYAMA	KATAYAMA				
	EMBOSSING CHANGED			'16.4.14	KAGEYAMA	TOMIWA				
CODE	REVISION HISTORY / CHANGES			DATE	APPD	REV.				
APPROVED	CHECKED	DRAWN	DATE CREATED		SCALE	NAME	ENGINE MOUNT			
KAGEYAMA	YOKOBE	TOMIWA	YEAR MONTH DAY '16. 2. 12		1/1		PART NO.	V1411-42162		

03160350