

The course of error due to distortion of input signal to the atan2 function

Mitja Alič

Faculty of Electrical Engineering, University of Ljubljana, Tržaška cesta 25, 1000 Ljubljana
E-pošta: mitja1357@gmail.com

Distortion of sine and cosine values, used for angle determination with the atan2 function, can result in numerical error. According to the performed review of literature, error is normally presented by taking only the basic harmonic into account. This paper however presents determination of error by taking into account also higher harmonics, which are non-negligible at larger distortion of sine or cosine. Error is going to be expressed with infinite series, which expand the domain of distortion parameter.

1 Introduction

These days the need for high quality motor regulation is present in numerous applications and has as a result become unavoidable. For a consistent and reliable measurement of rotation, position sensors are used [1], such as encoders and resolvers [2][3][4]. Because the output of such sensors is a pair of quadrature sine and cosine signals, angle must first be calculated. The easiest way of doing so is by directly calculating atan2, which returns a value between $[-\pi, \pi]$ [9].

Because position sensors aren't ideal, obtained sine and cosine signal can be deformed, phase shifted and DC offset. All of these imperfections cause the calculated angle to also include error.

Literature [5], [6], [7] and [8] analyses the impact of such imperfection for lower harmonics only and states that imperfections scale linearly. During our research it was found, that the frequency analysis also contains higher harmonics. The paper examines error waveform dependent on input signal mismatch with Fourier analysis.

2 Methodology and results

Output from a position sensor can be represented with

$$\text{Sin} = B_0 + B_1 \sin(\theta + \varphi_s) + CCM \quad (1)$$

$$\text{Cos} = A_0 + A_1 \cos(\theta + \varphi_c) + CCM \quad (2)$$

Where B_0 and A_0 represent DC offset, B_1 and A_1 signal amplitude, φ_s and φ_c phase shift and θ reference angle. Signals (1) and (2) can also have a common superimposed AC signal represented as CCM. CCM can be of cosine or sine form with Δ_c and Δ_s as amplitude.

$$CCM = \Delta_c \cos(\theta) + \Delta_s \sin(\theta) \quad (3)$$

By calculating atan2 for eq. (1) and (2)

$$\varphi = \text{atan2}(\text{Sin}, \text{Cos}) \quad (4)$$

and then subtracting it with an unaltered signal

$$\varepsilon = \varphi - \text{atan2}(\sin(\theta), \cos(\theta)) \quad (5)$$

We get error based on deformation. Because AC signal analysis is simpler in frequency domain we converted it with Fast Fourier Transform(FFT). By varying each parameter individually we examined the impact of the parameter in question on specter of error. Output of atan2 was examined by sending each parameter in eq. (1) and (2) to infinity or worst case with phase shift. In this case amplitude and phase of each harmonic approaches to a limit value.

Potek amplitude in faze v odvisnosti od spreminjajočega parametra, se je želelo aproksimirati s funkcijo, ki bi se najbolje prilegala numeričnim vrednotim dobljenih s FFT napake.

2.1 Defining of error at different amplitudes

Prvi primer predstavlja odvisnost napake od različnih amplitud vhodnih signalov. Izhod funkcije atan2 je določen preko razmerja vhodnih signalov. Ker je potrebno ohraniti le razmerje amplitud vhodnih signalov sem oba signala pomnožil z $1/A_1$. Razmerje med amplitudama vhodnih signalov se s tem ni spremenilo. Izraz B_1/A_1 je predstavljen kot k . Z poštevanjem le amplitud v (1) in (2) sta vhodna signala:

$$\text{Sin} = k \sin(\theta) \quad (6)$$

$$\text{Cos} = \cos(\theta). \quad (7)$$

S spreminjanjem parametra k od 0 do neskončno, opazovanjem napake in njegovega spektra je bilo ugotovljeno da napako ene periode sestavljajo le sodi harmoniki. Fazni zamik harmonikov je konstanten 90 degrees in je lahko predstavljen s sinusnim signalom. Amplituda posameznika

harmonika se z višanjem parametra k približuje vrednosti $2/n$ za sode in 0 za lihe harmonike.

$$\varepsilon(k \rightarrow \infty) = \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \sin 2n\theta \quad (8)$$

$$\varepsilon(k \rightarrow 0) = -\frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \sin 2n\theta \quad (9)$$

Naj izstopajočiji harmonik je drugi harmonik zato je bilo njemu namenjeno največ pozornosti. S poznanimi skrajnimi točkami in točko kjer je napaka nič, je potek harmonika z SSE $1,18e-10$ opisala racionalna funkcija (10)

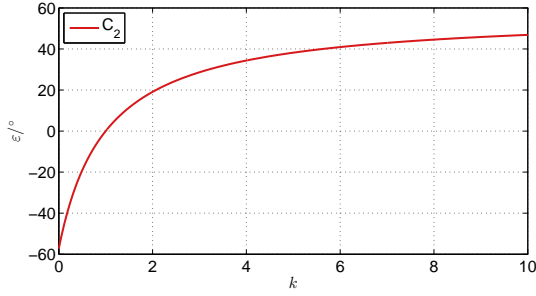


Figure 1: The course of the second harmonic depending on k

$$C_2(k) = \frac{180}{\pi} \cdot \frac{k-1}{k+1} \quad (10)$$

Predvideval sem da so višji harmoniki v korelaciji s najdeno funkcijo. Napako, ki se pojavi zaradi različnih amplitud sem zapisal v izraz Fourierove vrste (11)

$$\varepsilon(k) = \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \left(\frac{k-1}{k+1} \right)^n \sin 2n\theta \quad (11)$$

Z vstavljanjem namesto k razmerje amplitud in množenju številca in imenovalca s A_1 se končni izraz glasi:

$$\varepsilon(k) = \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \left(\frac{B_1 - A_1}{B_1 + A_1} \right)^n \sin 2n\theta \quad (12)$$

Izraz za napako velja le ko sta A_1 in B_1 enakega predznaka oz je njuno razmerje večje ali enako 0.

$$\frac{B_1}{A_1} \geq 0.$$

2.2 Defining of error at non-orthogonality

Sledilo je spreminjanje parametra faz vhodnih signalov. Amplitudi se je nastavilo na 1, vhodna signala sta bila odvisna le od θ in φ (13)(14).

$$\sin = \sin(\theta + \varphi_s) \quad (13)$$

$$\cos = \cos(\theta + \varphi_c) \quad (14)$$

Error can be transform and presented in Fourier series.

$$\varepsilon(\varphi_s \rightarrow 90^\circ) = 45^\circ - \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \sin(2n\theta) \quad (15)$$

$$\varepsilon(\varphi_s \rightarrow -90^\circ) = -45^\circ - \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \sin(2n\theta) \quad (16)$$

Transform includes offset and even harmonics only. Figure 2 presents course of offset C_0 , amplitude of second harmonic C_1 and phase of second harmonic φ_1 due to φ_s . y axis is in degrees. For C_0 and C_1 degrees presents amplitude of error harmonics, for φ_1 degrees presents phase. Offset is best fitted by linear function. Second harmonic is tangent function. Phase of second harmonic increases linear but for presentation with sine form must be added 90° . Same derivation can be done for phase of cosine signal. Equations can be marged and result is presented (17).

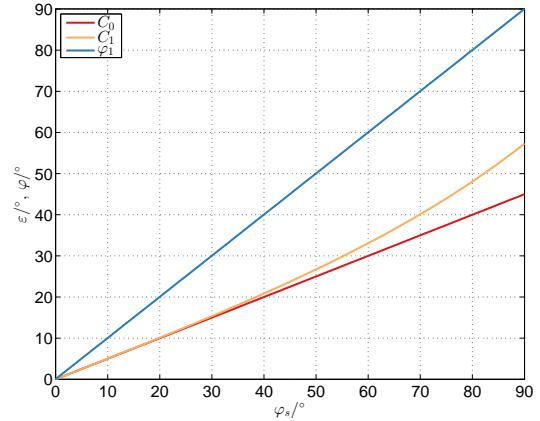


Figure 2: The course of offset component C_0 , amplitude of second harmonic C_1 and phase φ_1 depend of ideal cosine signal, due to phase shift φ_s

$$\varepsilon(\varphi_s, \varphi_c) = \frac{\varphi_s + \varphi_c}{2} + \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \left(\tan \frac{\varphi_s - \varphi_c}{2} \right)^n \sin(2n\theta + n(90^\circ + \varphi_s + \varphi_c)) \quad (17)$$

Expression is valid only for:

$$\varphi_s - \varphi_c \in [-90^\circ, 90^\circ]$$

2.3 Defining of error at offsets

Define amplitudes of input signals to 1, phase shift is set to zero. Let limit parameter A_0 to infinity, error is transformed to Fourier series and expressed as:

$$\varepsilon(A_0 \rightarrow \infty) = \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{2}{n} \sin(n\theta + 90^\circ n). \quad (18)$$

Error does not include offset component, highest amplitude has first harmonic. The course from figure 3 it is split to 3 parts and expression that best fit the curve is:

$$\varepsilon(A_0) = \begin{cases} \frac{180}{\pi} \sum_{n=1}^{\infty} (-1)^n \frac{1}{n} (2 - \frac{A_0}{A_1})^n \sin(n\theta), & \frac{A_0}{A_1} \leq -1 \\ \frac{180}{\pi} \sum_{n=1}^{\infty} (-1)^n \frac{1}{n} \left(\frac{A_0}{A_1} \right)^n \sin(n\theta), & |\frac{A_0}{A_1}| \leq 1 \\ \frac{180}{\pi} \sum_{n=1}^{\infty} (-1)^n \frac{1}{n} (2 - (\frac{A_0}{A_1})^{-n}) \sin(n\theta), & \frac{A_0}{A_1} \geq 1 \end{cases} \quad (19)$$

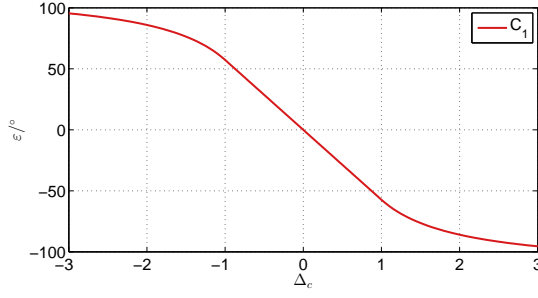


Figure 3: The course of amplitude of first harmonic due to offset A_0 , where input signals have amplitude of 1

Same derivation can be done for B_0 (20) and for fitting error, when sine and cosine include same offset ($A_0 = B_0$) (21).

$$\varepsilon(B_0) = \begin{cases} \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} (2 - |\frac{B_0}{B_1}|^{-n}) \sin(n\theta - 90^\circ n), & \frac{B_0}{B_1} \leq -1 \\ \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} (\frac{B_0}{B_1})^n \sin(n\theta + 90^\circ n), & |\frac{B_0}{B_1}| \leq 1 \\ \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} (2 - (\frac{B_0}{B_1})^{-n}) \sin(n\theta + 90^\circ n), & \frac{B_0}{B_1} \geq 1 \end{cases} \quad \varepsilon(\Delta_c) = \text{atan}(\frac{\Delta_c}{\Delta_c + 2A_1}) + \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \left(\frac{\Delta_c}{\sqrt{\Delta_c^2 + 2A_1\Delta_c + 2A_1}} \right)^n \sin(2n\theta + n(90^\circ + \text{atan}(\frac{\Delta_c + A_1}{A_1}))) \quad (20)$$

$$\varepsilon(A_0, B_0 = A_0) = \begin{cases} \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} (2 - |\sqrt{2} \frac{A_0}{A_1}|^{-n}) \sin(n\theta + 90^\circ n), & \frac{A_0}{A_1} \leq -\frac{\sqrt{2}}{2} (\Delta_s) = \\ \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} (\sqrt{2} \frac{A_0}{A_1})^n \sin(n\theta - 90^\circ n), & |\frac{A_0}{A_1}| \leq \frac{\sqrt{2}}{2} \\ \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} (2 - (\sqrt{2} \frac{A_0}{A_1})^{-n}) \sin(n\theta - 90^\circ n), & \frac{A_0}{A_1} \geq \frac{\sqrt{2}}{2} \end{cases} \quad \text{atan}(\frac{-\Delta_s}{\Delta_s + 2A_1}) + \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \left(\frac{\Delta_s}{\sqrt{\Delta_s^2 + 2A_1\Delta_s + 2A_1}} \right)^n \sin(2n\theta + n(90^\circ + \text{atan}(\frac{\Delta_s + A_1}{A_1}))) \quad (21)$$

2.4 Impact of different amplitude and phase due to one parameter

Transform to Fourier series of limit (5) to infinity of Δ_c , where inputs are (??) and (??) is

$$\varepsilon = 45^\circ - \frac{180}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} \sin(2n\theta). \quad (22)$$

The course of second harmonic due to Δ_c , can be express as sum of sine and cosine signal. Each signal is presented in figure 4.

$$C_{1s}(\Delta_c) \cdot \sin(2\theta) + C_{1c}(\Delta_c) \cdot \cos(2\theta) \quad (23)$$

Offset of error is fitted to invert tangent function. C_{1s} and C_{1c} are best fitted to rational function. Total amplitude is geometrical summation $C_n = \sqrt{C_{ns}^2 + C_{nc}^2}$, phase fitted to sine signal is calculated by $\varphi_n = \text{atan}(\frac{C_{nc}}{C_{ns}})$. Final equation due to Δ_c and Δ_s is expressed in (24) and (25)

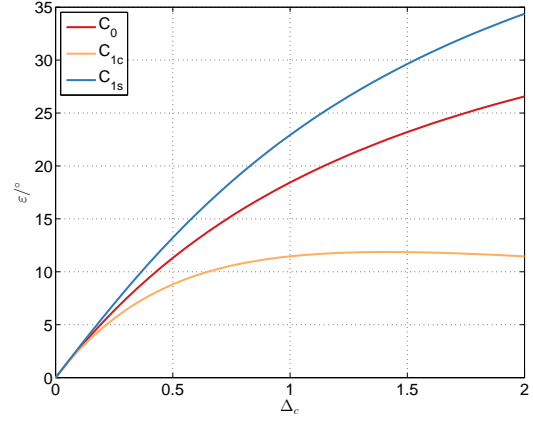


Figure 4: The course of offset and amplitude of second harmonic of error due to Δ_c

3 Comment on results

In test were used first 15 components of potency series. Difference between error predicted by results and actual error is only numeric (Figure 5). I made FFT of predicted error and actual error. Difference between amplitude of harmonics is numeric only. By increasing parameter error, actual error limit to discretion (nezveznosti). Error can not be fitted using first 15 components only. It is necessary to mention that despite the derivation, the presented types of errors of individual deformations still depends on each other.

4 Conclusion

This paper presents courses of error due to different amplitudes, different offsets, phase shifts and combination of parameters in input signals. Error includes higher harmonics, which become non-negligible at bigger distortion. For low distortion approximation, linear function can be adequatable. Literature confirmed results that was calculated at low distortion [6]. With those expression

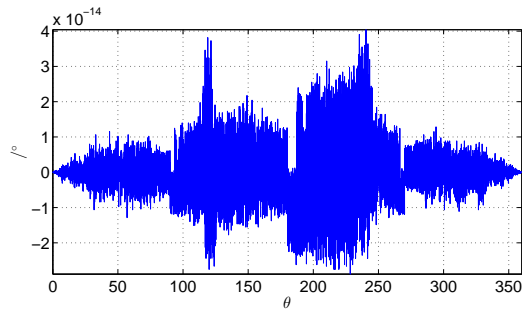


Figure 5: Difference between predicted (11) and actual error at $k = 1.1$

can be found reason of inappropriate installation of position sensor or actuator. Expressions can be used in applications where user do not have access to measured signals as are sine and cosine. Input signals can include higher harmonics too. Higher harmonics in input signals have impact to output signal and error. The influence of the distortion of the input signals in the atan2 function to the output error offers many challenges for further work.

Acknowledgment

This paper could not be possible without the help of some of my mentor and my professional colleagues. I am deeply grateful to their generous help in the design and experiment.

References

- [1] Gachter J., Hirz M., Seebacher R., "Impact of Rotor Position Sensor Errors on Speed Controlled Permanent Magnetized Synchronous Machines", IEEE 12th International Conference on Power Electronics and Drive Systems (PEDS), pp.822-830, 12-15 Dec. 2017
- [2] Brugnano F., Concari C., Imamovic E., Savi F., Toscani A., Zanichelli R., "A simple and accurate algorithm for speed measurement in electric drives using incremental encoder", IECON 2017 - 43rd Annual Conference of the IEEE Industrial Electronics Society, pp. 8551-8556, 29 Oct.-1 Nov. 2017
- [3] Reddy B.P., Murali A., Shaga G., "Low Cost Planar Coil Structure for Inductive Sensors to Measure Absolute Angular Position", 2017 2nd International Conference on Frontiers of Sensors Technologies (ICFST), pp.14-18, 14-16 April 2017
- [4] Zhang Z., Ni F., Liu H., Jin M., "Theory analysis of a new absolute position sensor based on electromagnetism", International Conference on Automatic Control and Artificial Intelligence, pp.2204-208, 3-5 Mar. 2012
- [5] Lara J., Chandra A., "Position Error Compensation in Quadrature Analog Magnetic Encoders through an Iterative Optimization Algorithm", IECON 2014 - 40th Annual Conference of the IEEE Industrial Electronics Society, pp.3043-3048, 29 Oct.-1 Nov. 2014
- [6] Qi Lin, T. Li, Z. Zhou, "Error Analysis and Compensation of the Orthogonal Magnetic Encoder", Proceedings of IEEE ICMCC Conference, pp.11-14, 21-23 Oct. 2011
- [7] Hanselman D.C., "Resolver Signal Requirements for High Accuracy Resolver-to-Digital Conversion", IEEE Transactions on Industrial Electronics, vol.37, no.6, pp.556-561, Dec. 1990
- [8] Demierre M., "Improvements of CMOS Hall Microsystems and Application for Absolute Angular Position Measurements", PhD. thesis, pp. 152-161, Federal Polytechnic School of Lausanne, Switzerland, 2003
- [9] <https://www.mathworks.com/help/matlab/ref/atan2.html>, dostop junij 2018
- [10] <https://www.mathworks.com/help/matlab/ref/atan2d.html>, dostop junij 2018