SECTION A-A: ASSEMBLY ELEVATION VIEW

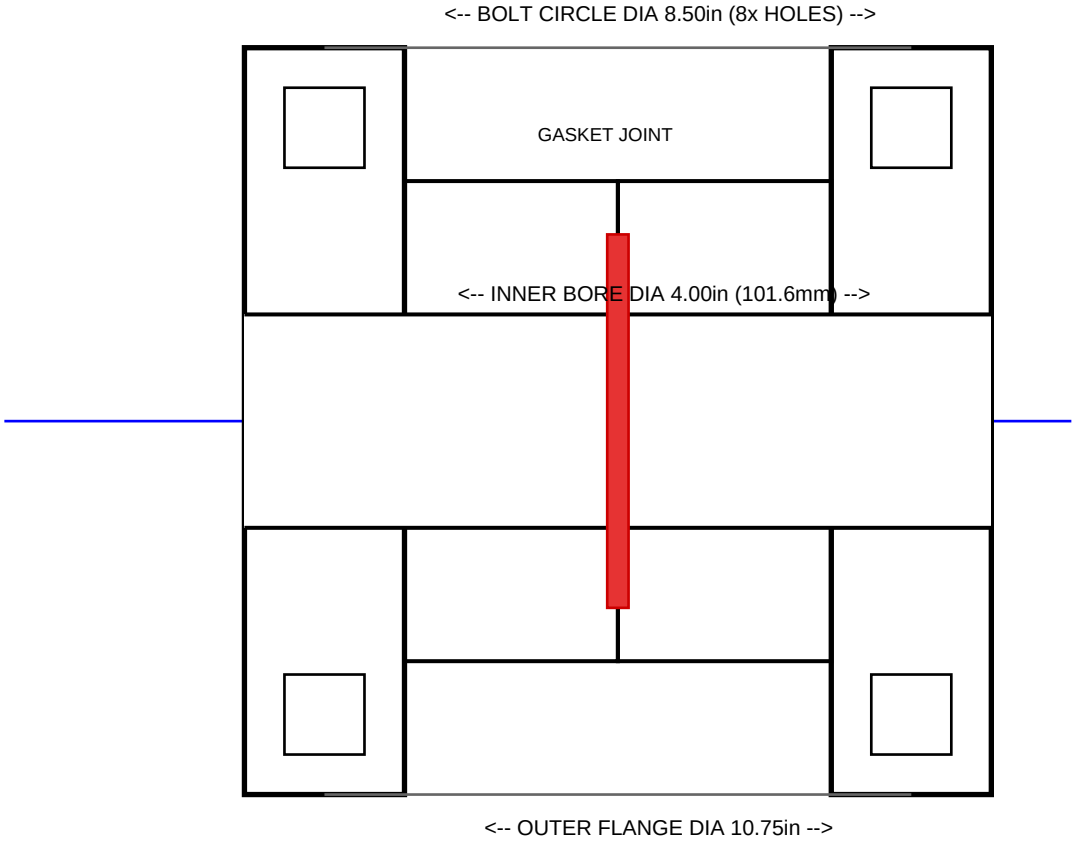

BILL OF MATERIALS (BOM)

ITEM	DESCRIPTION / SPEC	QTY	MATERIAL
1	Flange Body Weld Neck 4in	2	316L SS
2	Spiral Wound Gasket 4.0in	1	Graphite/316L
3	Stud Bolts 7/8in x 5.5in	8	ASTM A193 B8M
4	Heavy Hex Nuts 7/8in	16	ASTM A194 Gr 8M

ENGINEERING NOTES:

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2. HYDROSTATIC PRESSURE TEST REQUIRED AT 2220 PSI FOR 30 MINUTES.
3. 100% RADIOGRAPHIC EXAMINATION (RT) ON ALL CIRCUMFERENTIAL BUTT WELDS.
4. GASKET SEATING SURFACE TO HAVE SPIRAL SERRATED FINISH (125-250 Ra).
5. FASTENERS TO BE TORQUED TO 225 FT-LBS IN CRISSCROSS PATTERN.

CAD ENGINEERING ASSEMBLY BLUEPRINT

PART: HIGH-PRESSURE FLANGE ASSY	REV: D (APPROVED)
DWG NO: DWG-ENG-2026-4401	SCALE: 1:2
MATERIAL: 316L STAINLESS STEEL	TOL: +/- 0.010 in
RATING: CLASS 600 (1480 PSI)	DESIGNER: SECURE CAD TEAM