



1. Description

1.1. Project

Project Name	OBC
Board Name	custom
Generated with:	STM32CubeMX 6.18.1
Date	08/04/2026


1.2. MCU

MCU Series	STM32H7
MCU Line	STM32H743/753
MCU name	STM32H753ZITx
MCU Package	LQFP144
MCU Pin number	144

1.3. Core(s) information

Core(s)	ARM Cortex-M7
---------	---------------

2. Pinout Configuration

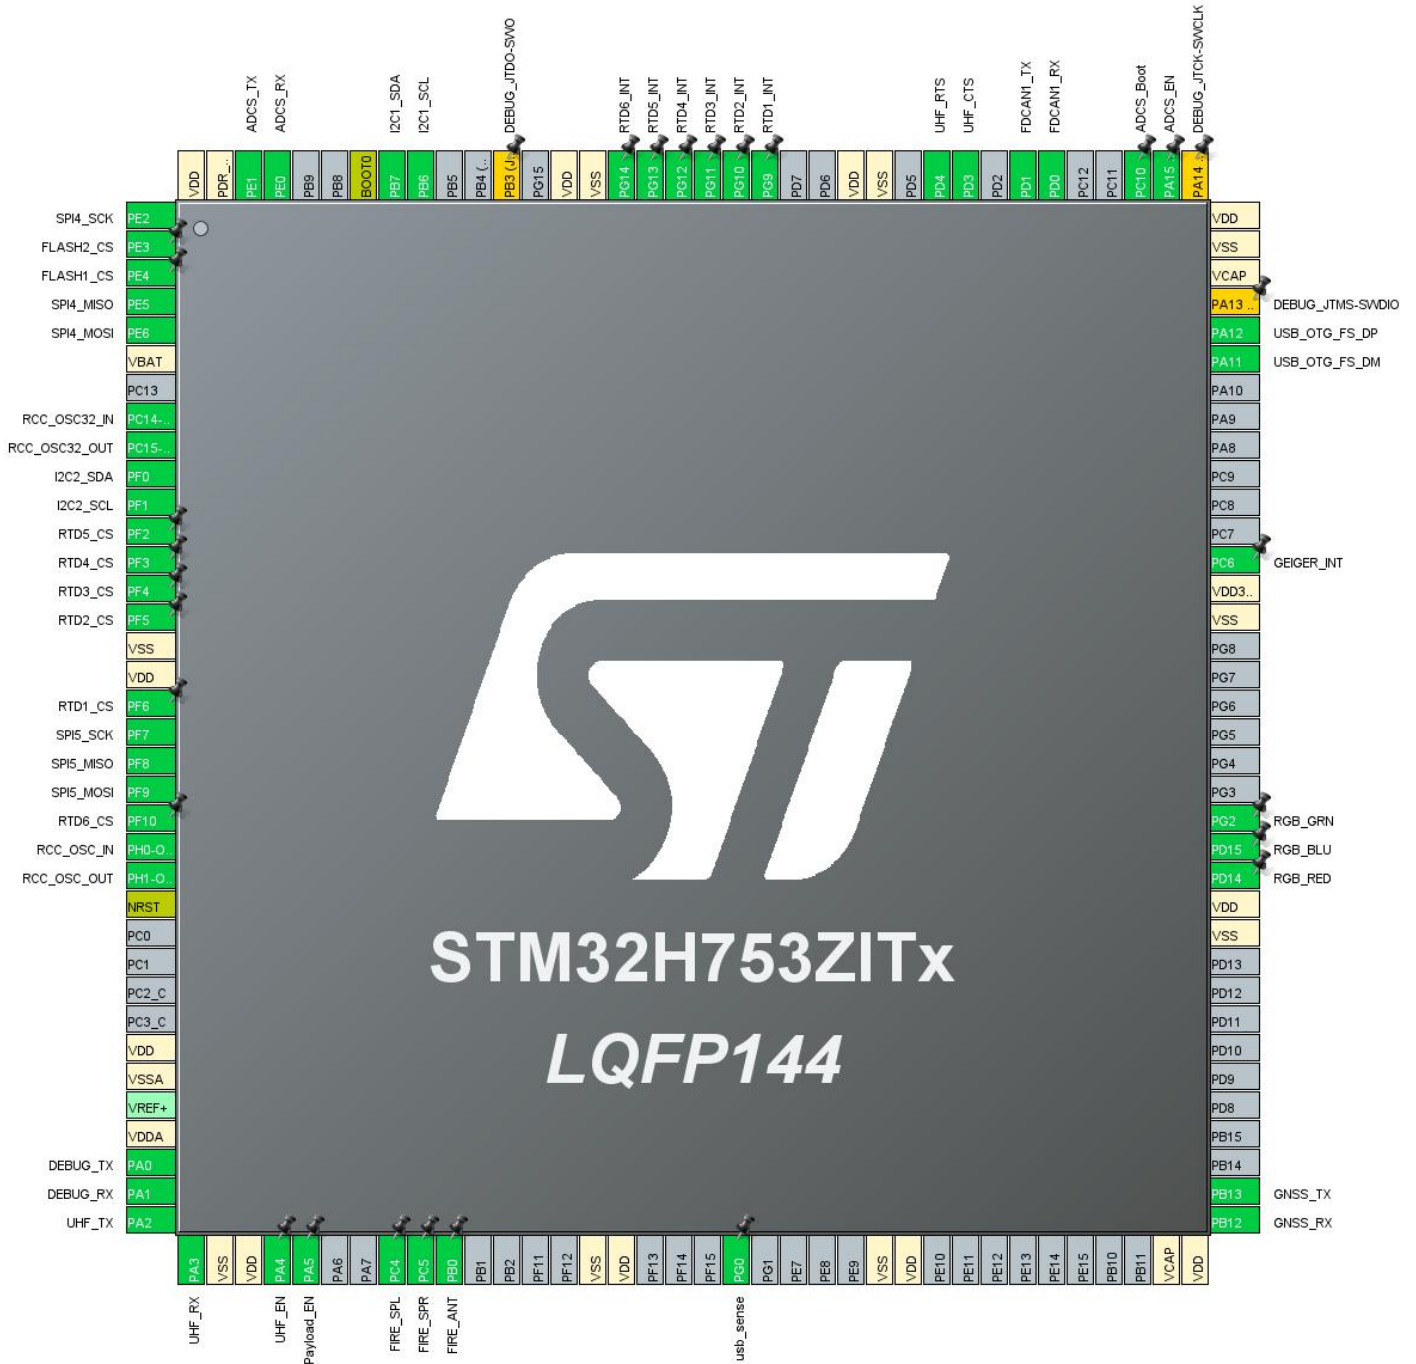

3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2	I/O	SPI4_SCK	
2	PE3 *	I/O	GPIO_Output	FLASH2_CS
3	PE4 *	I/O	GPIO_Output	FLASH1_CS
4	PE5	I/O	SPI4_MISO	
5	PE6	I/O	SPI4_MOSI	
6	VBAT	Power		
8	PC14-OSC32_IN (OSC32_IN)	I/O	RCC_OSC32_IN	
9	PC15-OSC32_OUT (OSC32_OUT)	I/O	RCC_OSC32_OUT	
10	PF0	I/O	I2C2_SDA	
11	PF1	I/O	I2C2_SCL	
12	PF2 *	I/O	GPIO_Output	RTD5_CS
13	PF3 *	I/O	GPIO_Output	RTD4_CS
14	PF4 *	I/O	GPIO_Output	RTD3_CS
15	PF5 *	I/O	GPIO_Output	RTD2_CS
16	VSS	Power		
17	VDD	Power		
18	PF6 *	I/O	GPIO_Output	RTD1_CS
19	PF7	I/O	SPI5_SCK	
20	PF8	I/O	SPI5_MISO	
21	PF9	I/O	SPI5_MOSI	
22	PF10 *	I/O	GPIO_Output	RTD6_CS
23	PH0-OSC_IN (PH0)	I/O	RCC_OSC_IN	
24	PH1-OSC_OUT (PH1)	I/O	RCC_OSC_OUT	
25	NRST	Reset		
30	VDD	Power		
31	VSSA	Power		
33	VDDA	Power		
34	PA0	I/O	UART4_TX	DEBUG_TX
35	PA1	I/O	UART4_RX	DEBUG_RX
36	PA2	I/O	USART2_TX	UHF_TX
37	PA3	I/O	USART2_RX	UHF_RX
38	VSS	Power		
39	VDD	Power		
40	PA4 *	I/O	GPIO_Output	UHF_EN

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
41	PA5 *	I/O	GPIO_Output	Payload_EN
44	PC4 *	I/O	GPIO_Output	FIRE_SPL
45	PC5 *	I/O	GPIO_Output	FIRE_SPR
46	PB0 *	I/O	GPIO_Output	FIRE_ANT
51	VSS	Power		
52	VDD	Power		
56	PG0 *	I/O	GPIO_Input	usb_sense
61	VSS	Power		
62	VDD	Power		
71	VCAP	Power		
72	VDD	Power		
73	PB12	I/O	UART5_RX	GNSS_RX
74	PB13	I/O	UART5_TX	GNSS_TX
83	VSS	Power		
84	VDD	Power		
85	PD14 *	I/O	GPIO_Output	RGB_RED
86	PD15 *	I/O	GPIO_Output	RGB_BLU
87	PG2 *	I/O	GPIO_Output	RGB_GRN
94	VSS	Power		
95	VDD33_USB	Power		
96	PC6	I/O	GPIO_EXTI6	GEIGER_INT
103	PA11	I/O	USB_OTG_FS_DM	
104	PA12	I/O	USB_OTG_FS_DP	
105	PA13 (JTMS/SWDIO) **	I/O	DEBUG_JTMS-SWDIO	
106	VCAP	Power		
107	VSS	Power		
108	VDD	Power		
109	PA14 (JTCK/SWCLK) **	I/O	DEBUG_JTCK-SWCLK	
110	PA15 (JTDI) *	I/O	GPIO_Output	ADCS_EN
111	PC10 *	I/O	GPIO_Output	ADCS_Boot
114	PD0	I/O	FDCAN1_RX	
115	PD1	I/O	FDCAN1_TX	
117	PD3	I/O	USART2_CTS	UHF_CTS
118	PD4	I/O	USART2_RTS	UHF_RTS
120	VSS	Power		
121	VDD	Power		
124	PG9	I/O	GPIO_EXTI9	RTD1_INT
125	PG10	I/O	GPIO_EXTI10	RTD2_INT
126	PG11	I/O	GPIO_EXTI11	RTD3_INT


Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
127	PG12	I/O	GPIO_EXTI12	RTD4_INT
128	PG13	I/O	GPIO_EXTI13	RTD5_INT
129	PG14	I/O	GPIO_EXTI14	RTD6_INT
130	VSS	Power		
131	VDD	Power		
133	PB3 (JTDO/TRACESWO) **	I/O	DEBUG_JTDO-SWO	
136	PB6	I/O	I2C1_SCL	
137	PB7	I/O	I2C1_SDA	
138	BOOT0	Boot		
141	PE0	I/O	UART8_RX	ADCS_RX
142	PE1	I/O	UART8_TX	ADCS_TX
143	PDR_ON	Power		
144	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

RIF configuration not available for STM32H753ZITx

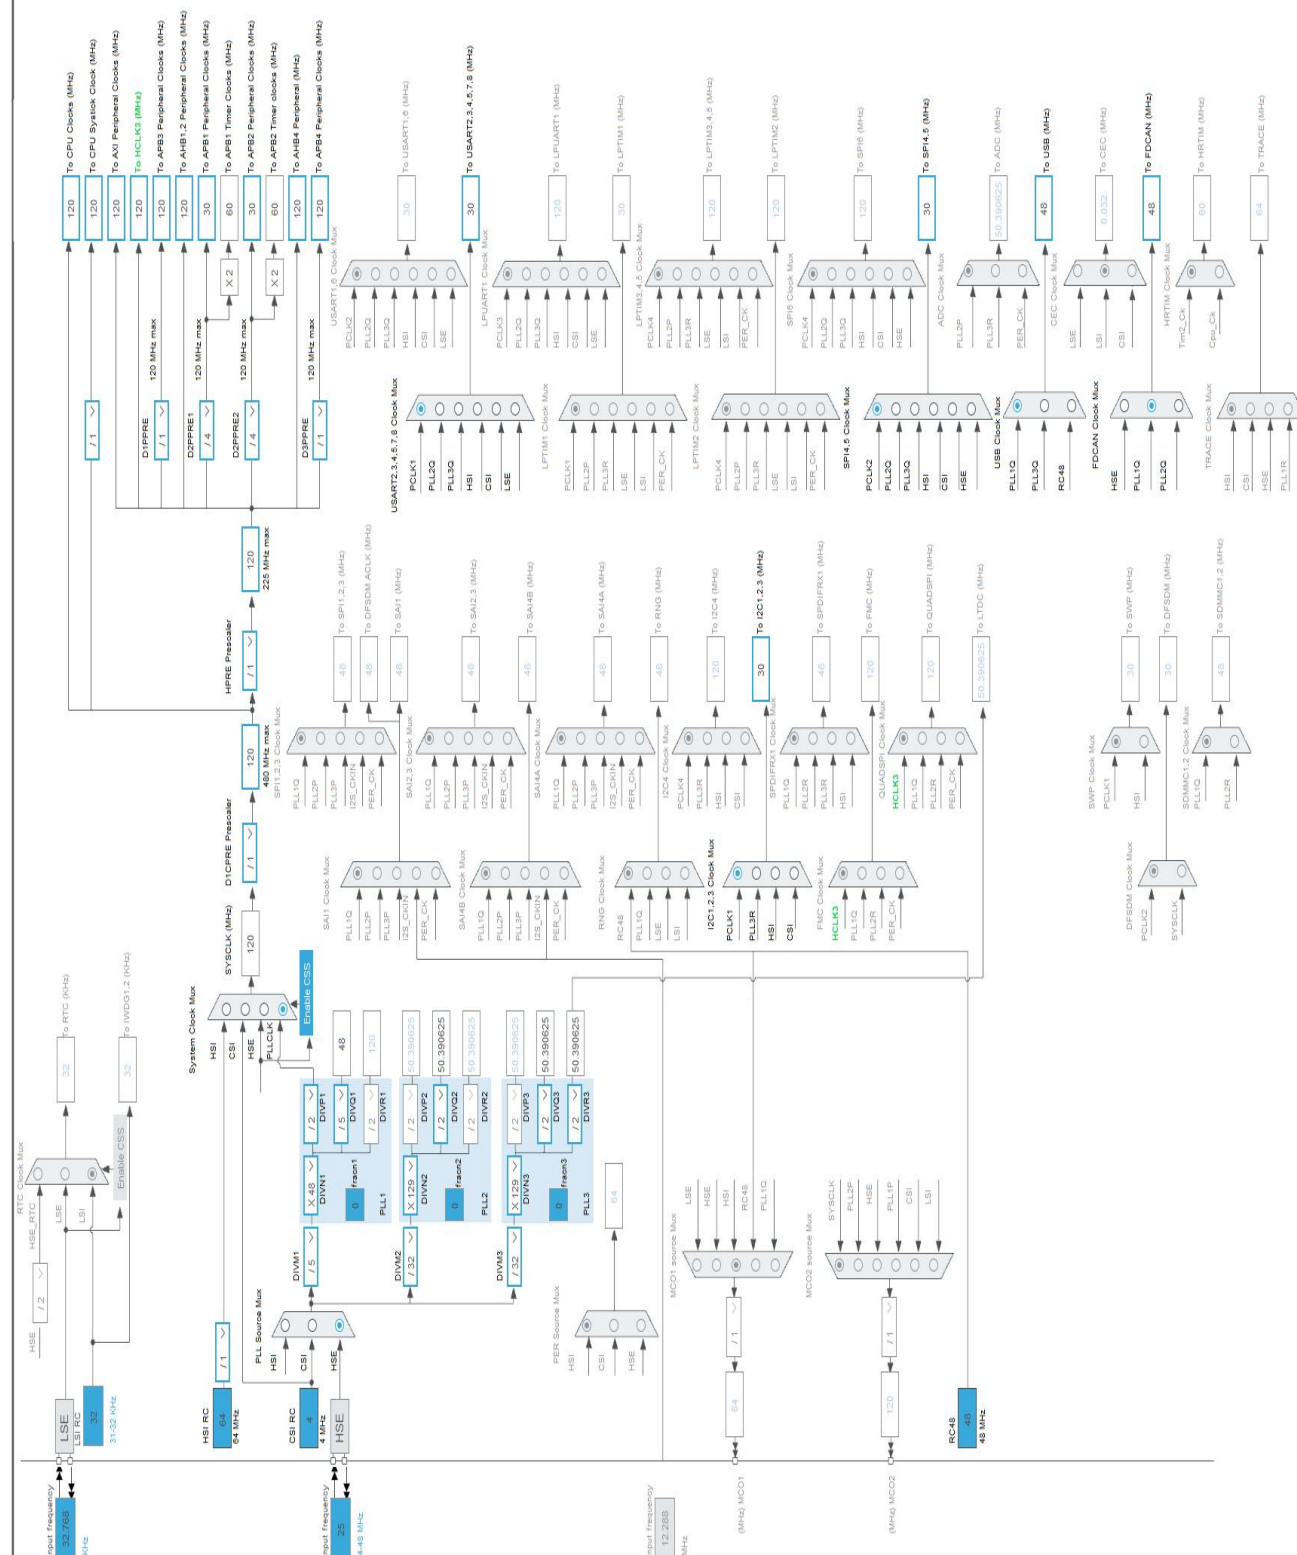

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32H7
Line	STM32H743/753
MCU	STM32H753ZITx
Datasheet	DS12117 Rev7

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Alkaline(9V)
Capacity	625.0 mAh
Self Discharge	0.3 %/month
Nominal Voltage	9.0 V
Max Cont Current	200.0 mA
Max Pulse Current	0.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	VOS0: Scale0-High	SVOS5: System-Scale5
D1 Mode	DRUN/CRUN	DSTANDBY
D2 Mode	DRUN	DSTANDBY
D3 Mode	DRUN	DSTOP
Fetch Type	ITCM	NA
CPU Frequency	480 MHz	0 Hz
Clock Configuration	HSE BYP PLL	Flash-OFF
Clock Source Frequency	24 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	148 mA	150 μ A
Duration	0.1 ms	0.9 ms
DMIPS	1027.0	0.0
Ta Max	105.46	124.98
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	14.94 mA
Battery Life	1 day, 17 hours	Average DMIPS	1027.2001 DMIPS

1.6. Chart

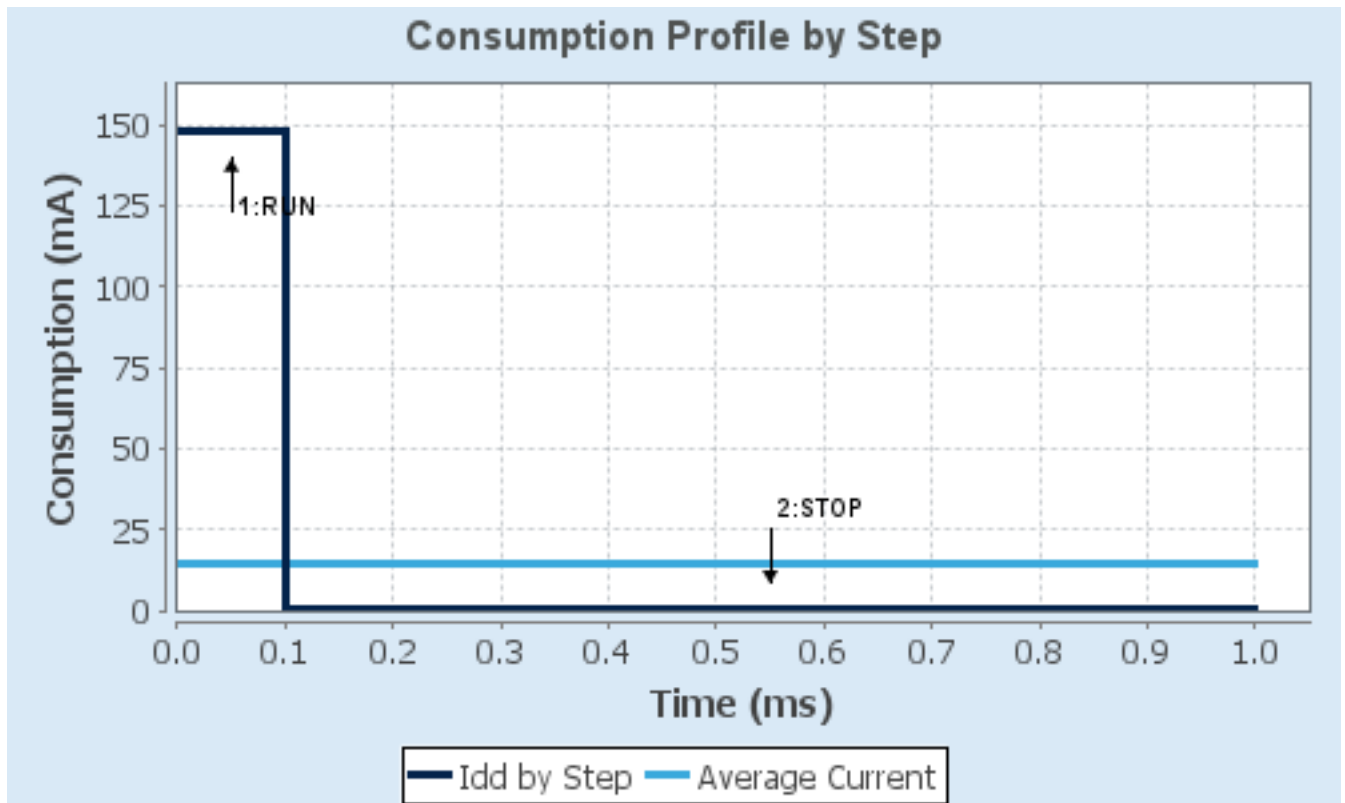

2. Software Project

2.1. Project Settings

Name	Value
Project Name	OBC
Project Folder	C:\Users\cortl\OneDrive\Desktop\ThRACE-1\OBC\OBC
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_H7 V1.13.0
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_FDCAN1_Init	FDCAN1
4	MX_I2C1_Init	I2C1
5	MX_I2C2_Init	I2C2
6	MX_SPI4_Init	SPI4
7	MX_SPI5_Init	SPI5
8	MX_UART4_Init	UART4
9	MX_UART5_Init	UART5
10	MX_UART8_Init	UART8
11	MX_USART2_UART_Init	USART2

Rank	Function Name	Peripheral Instance Name
12	MX_USB_OTG_FS_PCD_Init	USB_OTG_FS

3. Peripherals and Middlewares Configuration

3.1. CORTEX_M7

3.1.1. Parameter Settings:

Speculation default mode Settings:

Speculation default mode Enabled

Cortex Interface Settings:

CPU ICache Disabled

CPU DCache Disabled

Cortex Memory Protection Unit Control Settings:

MPU Control Mode Background Region Privileged accesses only + MPU Disabled during hard fault, NMI and FAULTMASK handlers

Cortex Memory Protection Unit Region 0 Settings:

MPU Region Enabled

MPU Region Base Address **0x0 ***

MPU Region Size 4GB

MPU SubRegion Disable **0x87 ***

MPU TEX field level level 0

MPU Access Permission ALL ACCESS NOT PERMITTED

MPU Instruction Access DISABLE

MPU Shareability Permission ENABLE

MPU Cacheable Permission DISABLE

MPU Bufferable Permission DISABLE

Cortex Memory Protection Unit Region 1 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 2 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 3 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 4 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 5 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 6 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 7 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 8 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 9 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 10 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 11 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 12 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 13 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 14 Settings:

MPU Region Disabled

Cortex Memory Protection Unit Region 15 Settings:

MPU Region Disabled

3.2. FDCAN1

mode: Activated

3.2.1. Parameter Settings:

Basic Parameters:

Frame Format	Classic mode
Mode	Normal mode
Auto Retransmission	Disable
Transmit Pause	Disable
Protocol Exception	Disable
Nominal Sync Jump Width	1
Data Prescaler	1
Data Sync Jump Width	1
Data Time Seg1	1
Data Time Seg2	1
Message Ram Offset	0
Std Filters Nbr	0
Ext Filters Nbr	0
Rx Fifo0 Elmts Nbr	0
Rx Fifo0 Elmt Size	8 bytes data field
Rx Fifo1 Elmts Nbr	0
Rx Fifo1 Elmt Size	8 bytes data field
Rx Buffers Nbr	0
Rx Buffer Size	8 bytes data field

Tx Events Nbr	0
Tx Buffers Nbr	0
Tx Fifo Queue Elmts Nbr	0
Tx Fifo Queue Mode	FIFO mode
Tx Elmt Size	8 bytes data field

Clock Calibration Unit:

Clock Calibration	Disable
-------------------	---------

Bit Timings Parameters:

Nominal Prescaler	16
Nominal Time Quantum	333.3333333333333 *
Nominal Time Seg1	1
Nominal Time Seg2	1
Nominal Time for one Bit	1000
Nominal Baud Rate	1000000 *

3.3. I2C1

I2C: I2C

3.3.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x007074AF *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.4. I2C2

I2C: I2C

3.4.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x007074AF *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.5. MEMORYMAP

mode: Activated

3.6. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

3.6.1. Parameter Settings:

Power Parameters:

SupplySource	PWR_LDO_SUPPLY
Power Regulator Voltage Scale	Power Regulator Voltage Scale 3

RCC Parameters:

TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
CSI Calibration Value	32
HSI Calibration Value	64

System Parameters:

VDD voltage (V)	3.3
-----------------	-----

Flash Latency(WS)	2 WS (3 CPU cycle)
Product revision	rev.V
PLL range Parameters:	
PLL1 clock Input range	Between 4 and 8 MHz
PLL1 clock Output range	Wide VCO range

3.7. SPI4

Mode: Full-Duplex Master

3.7.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	15.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software
Fifo Threshold	Fifo Threshold 01 Data
Tx Crc Initialization Pattern	All Zero Pattern
Rx Crc Initialization Pattern	All Zero Pattern
Nss Polarity	Nss Polarity Low
Master Ss Idleness	00 Cycle
Master Inter Data Idleness	00 Cycle
Master Receiver Auto Susp	Disable
Master Keep Io State	Master Keep Io State Disable
IO Swap	Disabled

3.8. SPI5

Mode: Full-Duplex Master

3.8.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	15.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software
Fifo Threshold	Fifo Threshold 01 Data
Tx Crc Initialization Pattern	All Zero Pattern
Rx Crc Initialization Pattern	All Zero Pattern
Nss Polarity	Nss Polarity Low
Master Ss Idleness	00 Cycle
Master Inter Data Idleness	00 Cycle
Master Receiver Auto Susp	Disable
Master Keep Io State	Master Keep Io State Disable
IO Swap	Disabled

3.9. SYS

Timebase Source: SysTick

3.10. UART4

Mode: Asynchronous

3.10.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

Single Sample	Disable
ClockPrescaler	1
Fifo Mode	FIFO mode disable
Txfifo Threshold	1 eighth full configuration
Rxfifo Threshold	1 eighth full configuration

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

3.11. UART5

Mode: Asynchronous

3.11.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable
ClockPrescaler	1
Fifo Mode	FIFO mode disable
Txfifo Threshold	1 eighth full configuration
Rxfifo Threshold	1 eighth full configuration

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable

3.12.1. Parameter Settings:

3.13.1. Parameter Settings:

Stop Bits	1
Advanced Parameters:	
Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable
ClockPrescaler	1
Fifo Mode	Disable
Txfifo Threshold	1 eighth full configuration
Rxfifo Threshold	1 eighth full configuration

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

3.14. USB_OTG_FS

Mode: Device_Only

3.14.1. Parameter Settings:

Speed	Full Speed 12MBit/s
Enable internal IP DMA	Disabled
Low power	Disabled
Battery charging	Disabled
Link Power Management	Disabled
Use dedicated end point 1 interrupt	Disabled
VBUS sensing	Disabled
Signal start of frame	Disabled

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
FDCAN1	PD0	FDCAN1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PD1	FDCAN1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Low	
	PB7	I2C1_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Low	
I2C2	PF0	I2C2_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Low	
	PF1	I2C2_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Low	
RCC	PC14-OSC32_IN (OSC32_IN)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0-OSC_IN (PH0)	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT (PH1)	RCC_OSC_OUT	n/a	n/a	n/a	
SPI4	PE2	SPI4_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PE5	SPI4_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PE6	SPI4_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	
SPI5	PF7	SPI5_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PF8	SPI5_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PF9	SPI5_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Low	
UART4	PA0	UART4_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	DEBUG_TX
	PA1	UART4_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	DEBUG_RX
UART5	PB12	UART5_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	GNSS_RX
	PB13	UART5_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	GNSS_TX
UART8	PE0	UART8_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	ADCS_RX
	PE1	UART8_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	ADCS_TX
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	UHF_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	UHF_RX
	PD3	USART2_CTS	Alternate Function Push Pull	No pull-up and no pull-down	Low	UHF_CTS
	PD4	USART2_RTS	Alternate Function Push Pull	No pull-up and no pull-down	Low	UHF_RTS
USB_OTG_	PA11	USB_OTG_FS_	Alternate Function Push Pull	No pull-up and no pull-down	Low	

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
FS		DM				
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Low	
Single Mapped Signals	PA13 (JTMS/SWDIO)	DEBUG_JTMS-SWDIO	n/a	n/a	n/a	
	PA14 (JTCK/SWCLK)	DEBUG_JTCK-SWCLK	n/a	n/a	n/a	
	PB3 (JTDO/TRACESWO)	DEBUG_JTDO-SWO	n/a	n/a	n/a	
GPIO	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	FLASH2_CS
	PE4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	FLASH1_CS
	PF2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RTD5_CS
	PF3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RTD4_CS
	PF4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RTD3_CS
	PF5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RTD2_CS
	PF6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RTD1_CS
	PF10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RTD6_CS
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	UHF_EN
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Payload_EN
	PC4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	FIRE_SPL
	PC5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	FIRE_SPR
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	FIRE_ANT
	PG0	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	usb_sense
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RGB_RED
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RGB_BLU
	PG2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RGB_GRN
	PC6	GPIO_EXTI6	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	GEIGER_INT
	PA15 (JTDI)	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	ADCS_EN
	PC10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	ADCS_Boot
	PG9	GPIO_EXTI9	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	RTD1_INT
	PG10	GPIO_EXTI10	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	RTD2_INT
	PG11	GPIO_EXTI11	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	RTD3_INT
	PG12	GPIO_EXTI12	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	RTD4_INT
	PG13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	RTD5_INT

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PG14	GPIO_EXTI14	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	RTD6_INT

4.2. DMA configuration

nothing configured in DMA service

4.3. BDMA configuration

nothing configured in DMA service

4.4. MDMA configuration

nothing configured in DMA service

4.5. NVIC configuration

4.5.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	15	0
PVD and AVD interrupts through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
FDCAN1 interrupt 0	unused		
FDCAN1 interrupt 1	unused		
EXTI line[9:5] interrupts	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
I2C2 event interrupt	unused		
I2C2 error interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
UART4 global interrupt	unused		
UART5 global interrupt	unused		
FDCAN calibration unit interrupt	unused		
FPU global interrupt	unused		
UART8 global interrupt	unused		
SPI4 global interrupt	unused		
SPI5 global interrupt	unused		
USB On The Go FS End Point 1 Out global interrupt	unused		
USB On The Go FS End Point 1 In global interrupt	unused		
USB OTG FS global interrupt	unused		
HSEM1 global interrupt	unused		

4.5.2. NVIC Code generation

Enabled interrupt Table	Select for init	Generate IRQ	Call HAL handler
-------------------------	-----------------	--------------	------------------


Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true

*** User modified value**


5. System Views

5.1. Category view


5.1.1. Current



5.1.2. Without filters



5.2. Power Domain view



6. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32h7-bsdl.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32h7_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32h7-svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers_stm32h7_series_product_overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32h7rs-lines-overview.pdf
Brochures	https://www.st.com/resource/en/brochure/brstm32h7.pdf
Brochures	https://www.st.com/resource/en/brochure/humanoid-robot-reference-guide.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Flyers	https://www.st.com/resource/en/flyer/flpowerstbd.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32h7rs.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf
Security Bulletin	https://www.st.com/resource/en/security_bulletin/sb0023-eucleak-

protection-statement-for-stmicroelectronics-certified-products-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4539-hrtim-cookbook-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4839-level-1-cache-on-stm32f7-series-and-stm32h7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4891-stm32h72x-stm32h73x-and-singlecore-stm32h74x75x-system-architecture-and-performance-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4990-getting-started-with-sigmadelta-digital-interface-on-applicable-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5033-stm32cube-mcu-package-examples-for-stm32h7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5312-migration-from-revy-to-revv-for-stm32h743753-and-stm32h750-value-line-microcontrollers-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5293-migration-guide-from-stm32f7-series-to-stmh74x75x-stm32h72x73x-and-stmh7a37bx-devices-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4991-how-to-wake-up-an-stm32-microcontroller-from-lowpower-mode-with-the-usart-or-the-lpuart-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5342--how-to-use-error-correction-code-ecc-management-for-internal-memories-protection-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4938-getting-started-with-stm32h74xig-and-stm32h75xig-mcu-hardware-development-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4992-introduction-to-secure-firmware-install-sfi-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5405-how-to-use-fdcan-bootloader-protocol-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5690-how-to-use-

vrefbuf-peripheral-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2867-guidelines-for-oscillator-design-on-stm8afals-and-stm32-mcusmpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4861-introduction-to-lcdtft-display-controller-ltcd-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4908-getting-started-with-usart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4943-how-to-use-chromart-accelerator-to-refresh-an-lcdtft-display-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5224-introduction-to-dmamux-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5507-how-to-use-crc-to-check-the-integrity-of-the-internal-flash-memory-on-stm32h7-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5337-guidelines-for-estimating-stm32h7-mcus-lifetime-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4996-how-to-use-the-jpeg-codec-peripheral-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5348-introduction-to-fdcan-peripherals-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5020-introduction-to-digital-camera-interface-dcml-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-introduction-to-system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5200-getting-started-with-the-stm32h7-mcu-sdmmc-host-controller-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3126-how-to-use-dac-for-audio-and-waveform-generation-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3155-how-to-use-usart-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3156-how-to-use-usb-dfu-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4286-how-to-use-spi-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes	https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4760-introduction-to-quadspi-interface-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4776-how-to-use-generalpurpose-timer-peripheral-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4936-migrating-applications-from-stm32f7-to-stm32h743h753-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4989-introduction-to-debug-toolbox-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5927-how-to-use-i3c-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5354-getting-started-with-16bit-adc-on-stm32h7-mcus-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0117-microphone-array-beamforming-in-the-pcm-and-pdm-domain-stmicroelectronics.pdf
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0392-stm32h742xig-stm32h743xig-stm32h750xb-stm32h753xi-device-errata-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00388325.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0253-stm32f7-series-and-stm32h7-series-cortexm7-processor-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0433-stm32h742-stm32h743753-and-stm32h750-value-line-advanced-armbased-32bit-mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-

	stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-devices-in-bga-packages-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um2840-stm32h7-dualcore-series-safety-manual-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um2331-stm32h7-singlecore-series-safety-manual-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3252-stm32h7-series-ulcsaiec-607301603351-selftest-library-user-guide-stmicroelectronics.pdf