



Robot wheel and sensor geometry

Origin = centroid of 8 mounting screws; coordinates in millimetres; +x right, +y forward, +z up


A. Top-down mechanical and sensor layout

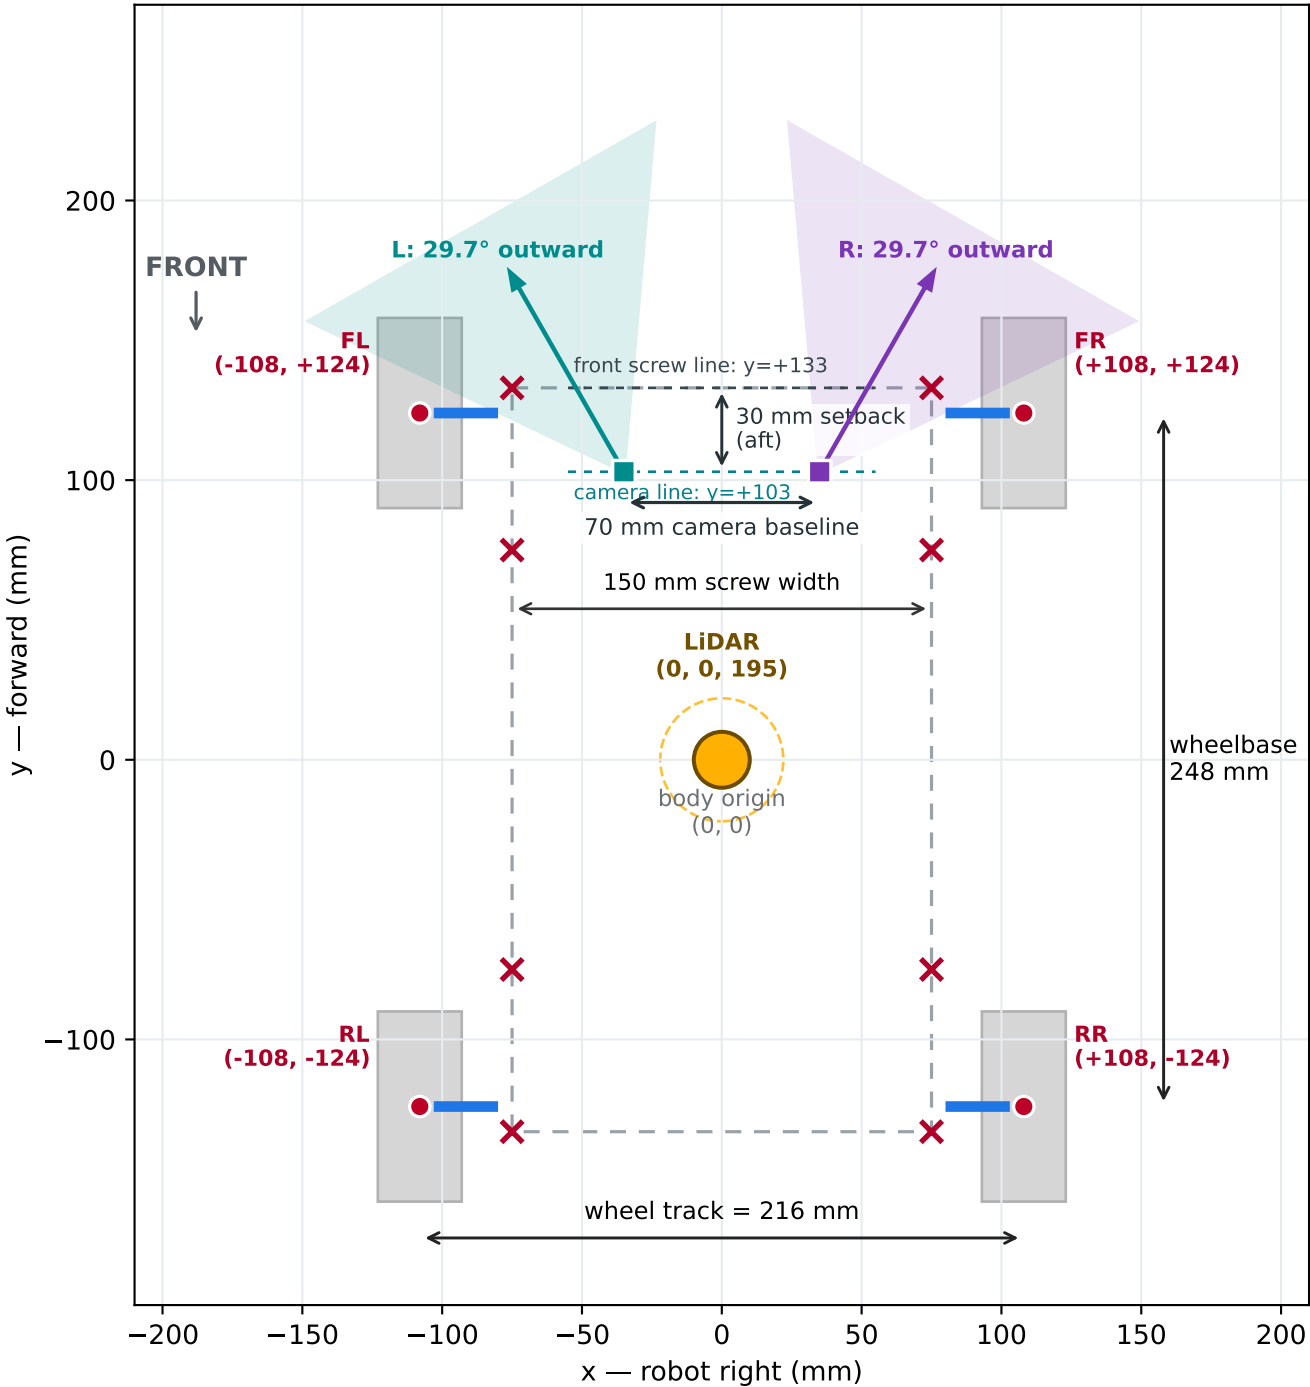

B. Front elevation

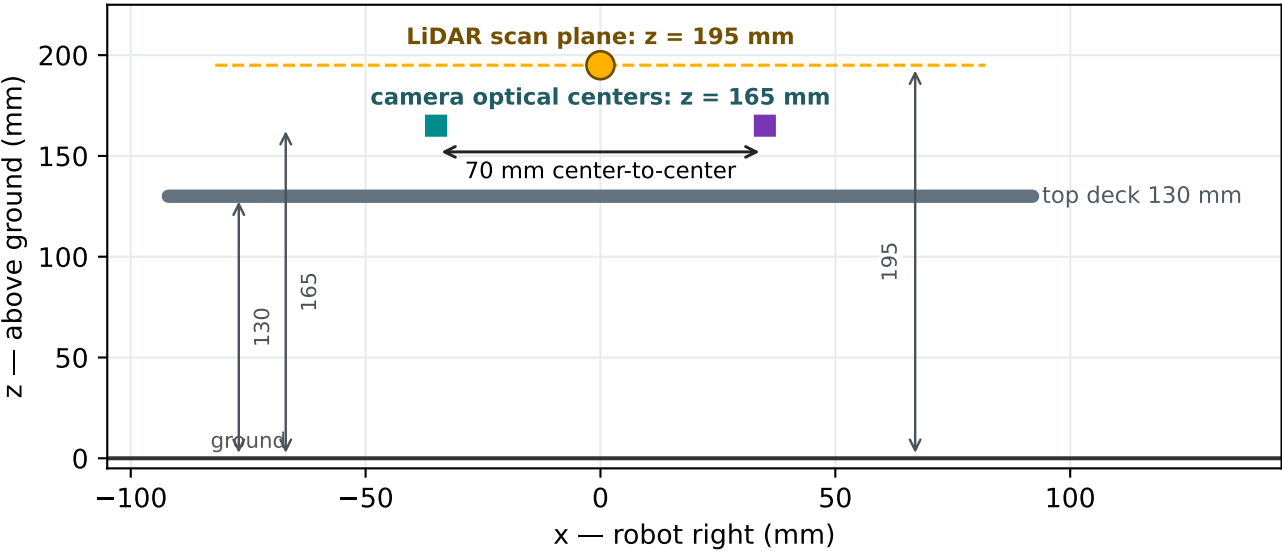

C. Side elevation and vertical camera FOV

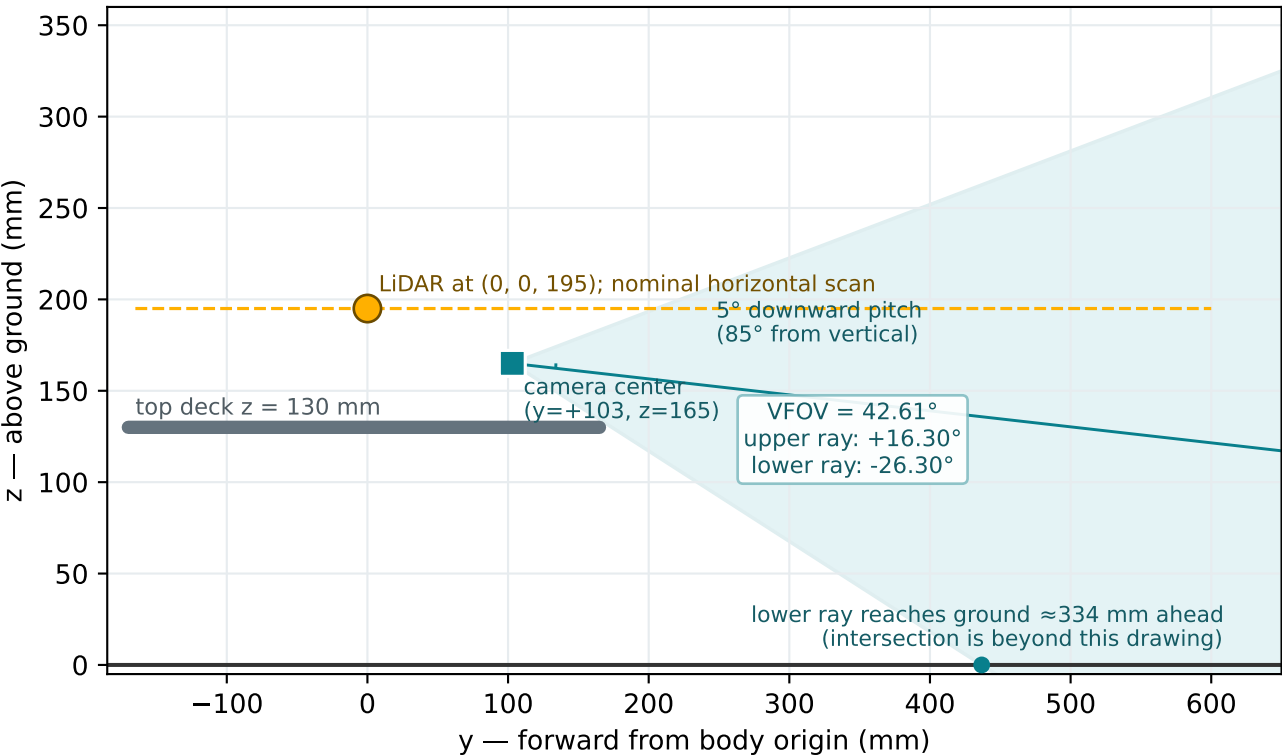

CAMERA GEOMETRY (nominal, before calibration)
centers: L (-35, +103, +165) mm R (+35, +103, +165) mm
placement: 30 mm aft of the forward screw line (y=+133)
baseline: 70 mm | advertised DFOV: 77° at 1280x720 (16:9)
derived pinhole HFOV/VFOV: 69.47° / 42.61°
yaw: ±29.73° outward | pitch: 5° down (85° from vertical)
frontal overlap: 10° | horizontal union: 128.93° (±64.47°)
centerline dual-view crossover: 400 mm ahead of camera plane
LiDAR: (0, 0, +195) mm; deck: z=130 mm

FOV note: 69.47° × 42.61° is calculated from a rectilinear 77° diagonal specification and the 1280x720 active image. Calibrate the exact Argus stream before freezing the MuJoCo intrinsics and yaw.