


OSPF4.Virtual-Link, 인증

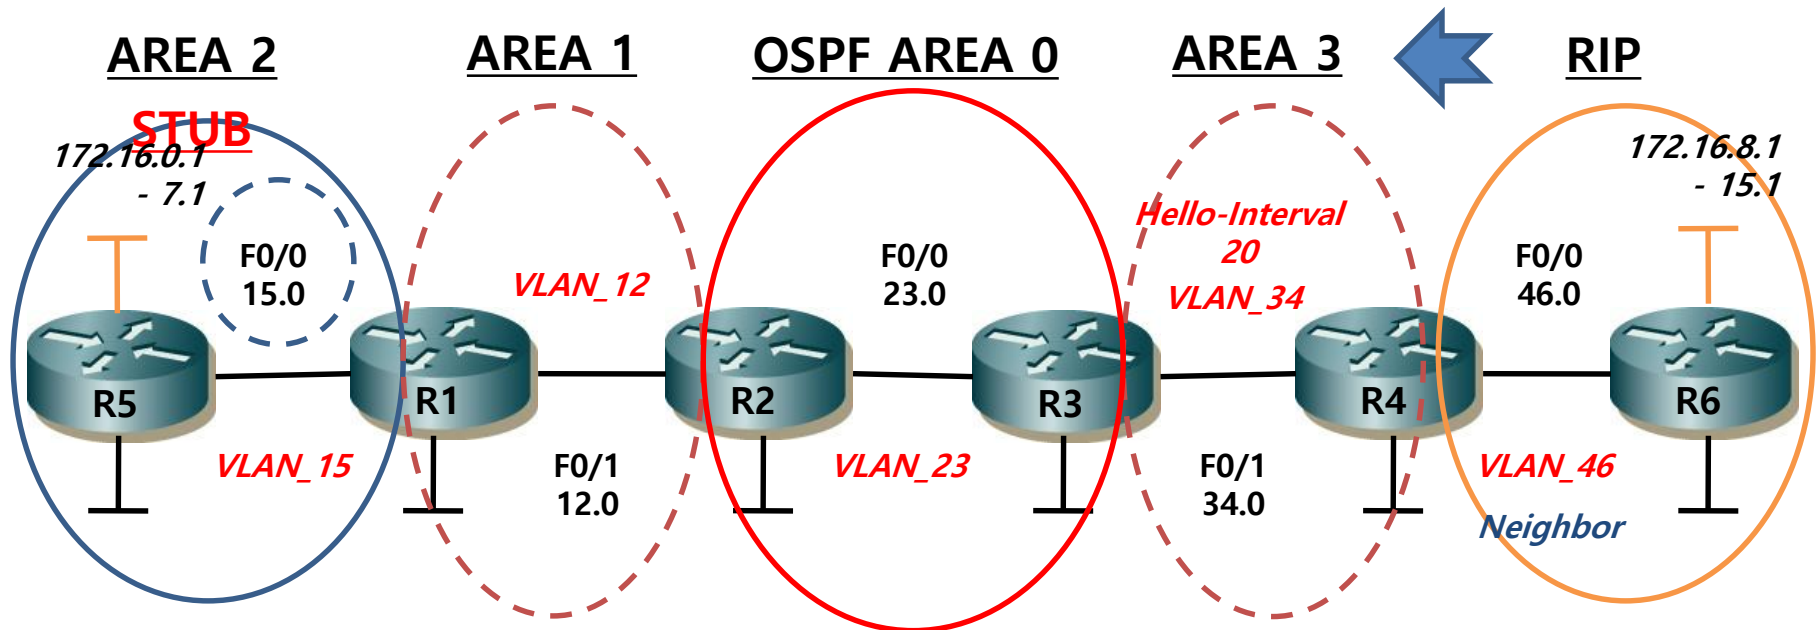

OSPF4.Virtual-Link, 인증

- R5과 R6: Lo172 생성
 - R5: 172.16.1.1 – 7.1
 - R6: 172.16.8.1 – 15.1
- Summary
 - ABR, ASBR Summary
- Virtual Link 인증
 - MD5 인증
 - Key: 1
 - Key-String: cisco
- Interface 인증
 - R5 – R1
- 기준 대역폭 변경
 - 10^9
- 재분배
 - R4: RIP → OSPF
- Default Route
 - RIP Router Mode
- R3-R4 f0/1
 - Hello-Interval 20
- S/W1 Vlan
 - Vlan 15, 23, 46
- SW2 Vlan
 - Vlan 12, 34