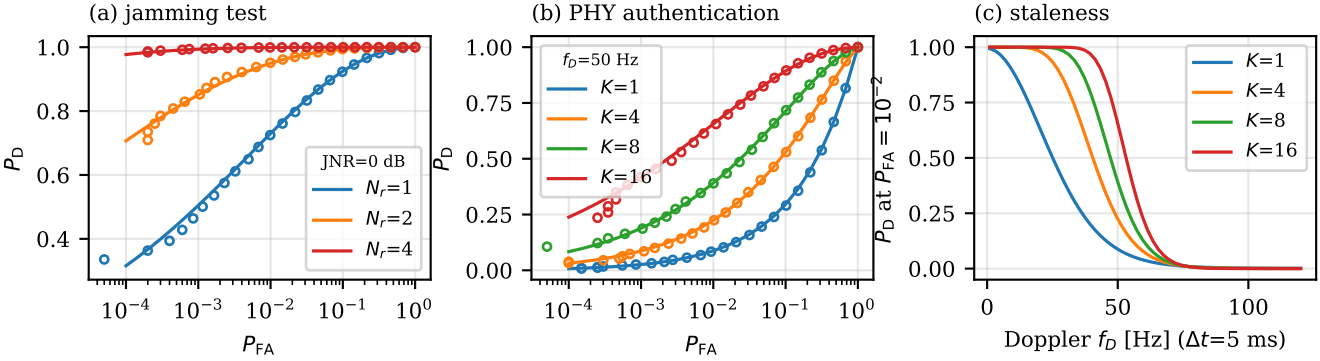
(a) jamming test
(b) PHY authentication
(c) staleness
P_D
P_{FA}
JNR=0 dB
N_r=1
N_r=2
N_r=4
f_D=50 Hz
K=1
K=4
K=8
K=16
P_D at $P_{FA} = 10^{-2}$
Doppler f_D [Hz] (Δt=5 ms)