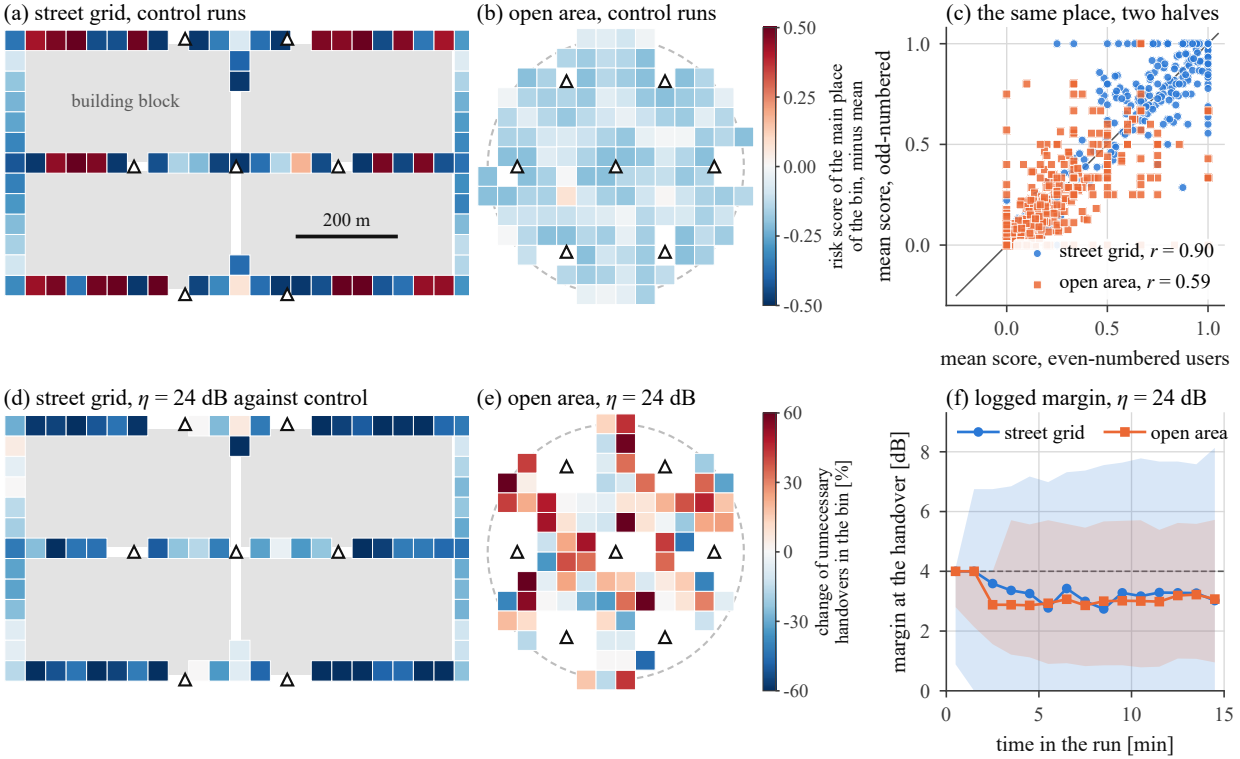

(a) street grid, control runs
building block
200 m
(b) open area, control runs
0.50
0.25
0.00
-0.25
-0.50
risk score of the main place of the bin, minus mean
(c) the same place, two halves
mean score, odd-numbered
1.0
0.5
0.0
street grid, r = 0.90
open area, r = 0.59
0.0
0.5
1.0
mean score, even-numbered users
(d) street grid, η = 24 dB against control
(e) open area, η = 24 dB
60
30
0
-30
-60
change of unnecessary handovers in the bin [%]
(f) logged margin, η = 24 dB
street grid
open area
margin at the handover [dB]
8
6
4
2
0
0
5
10
15
time in the run [min]