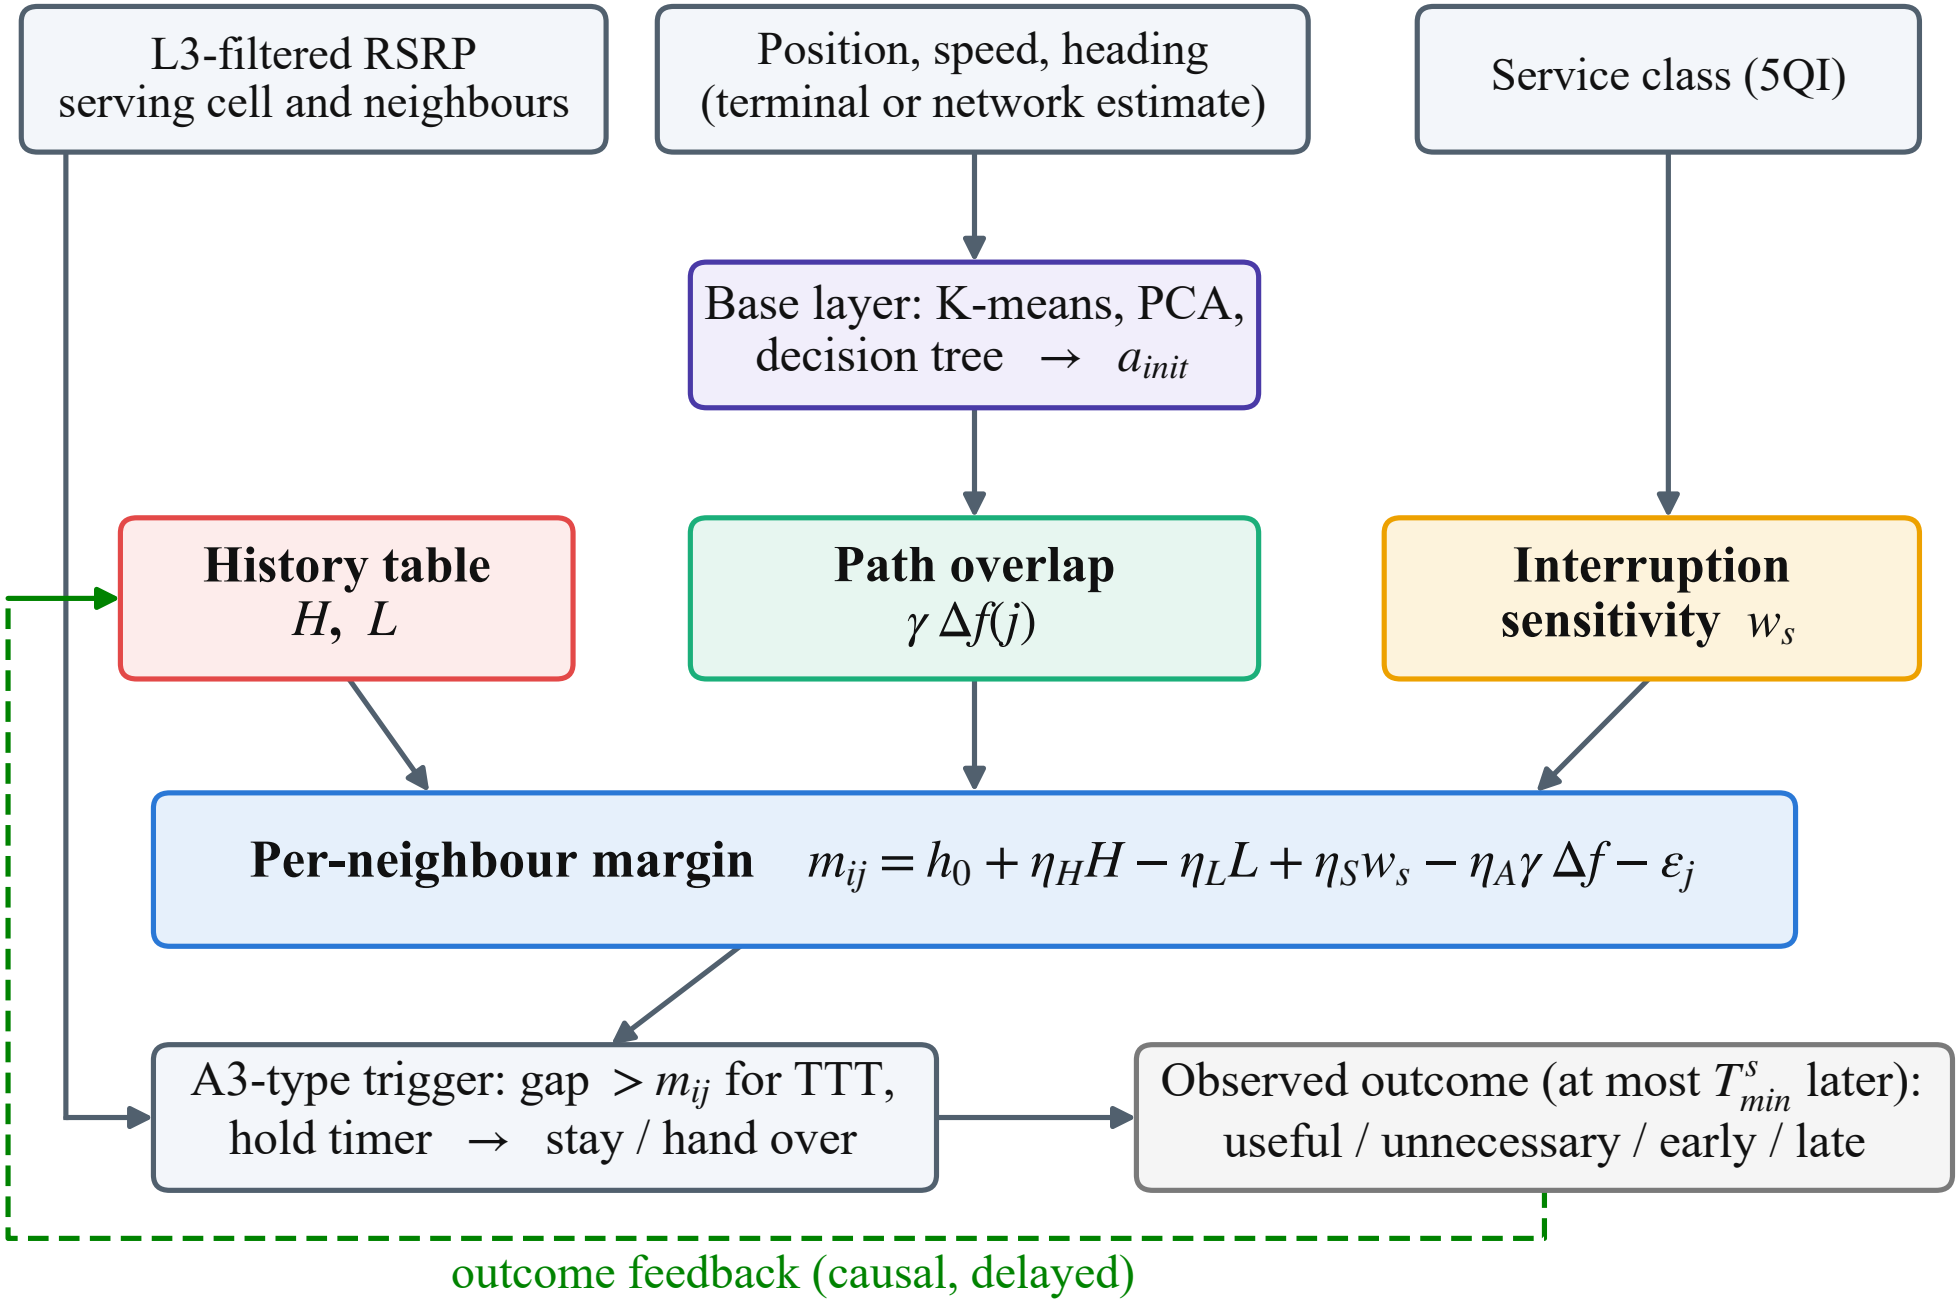

L3-filtered RSRP
serving cell and neighbours
Position, speed, heading
(terminal or network estimate)
Service class (5QI)
Base layer: K-means, PCA,
decision tree → a_{init}
History table
H, L
Path overlap
$\gamma\,\Delta f(j)$
Interruption
sensitivity w_s
Per-neighbour margin $m_{ij} = h_0 + \eta_H H - \eta_L L + \eta_S w_s - \eta_A \gamma\,\Delta f - \varepsilon_j$
A3-type trigger: gap $> m_{ij}$ for TTT,
hold timer → stay / hand over
Observed outcome (at most T^s_{min} later):
useful / unnecessary / early / late
outcome feedback (causal, delayed)