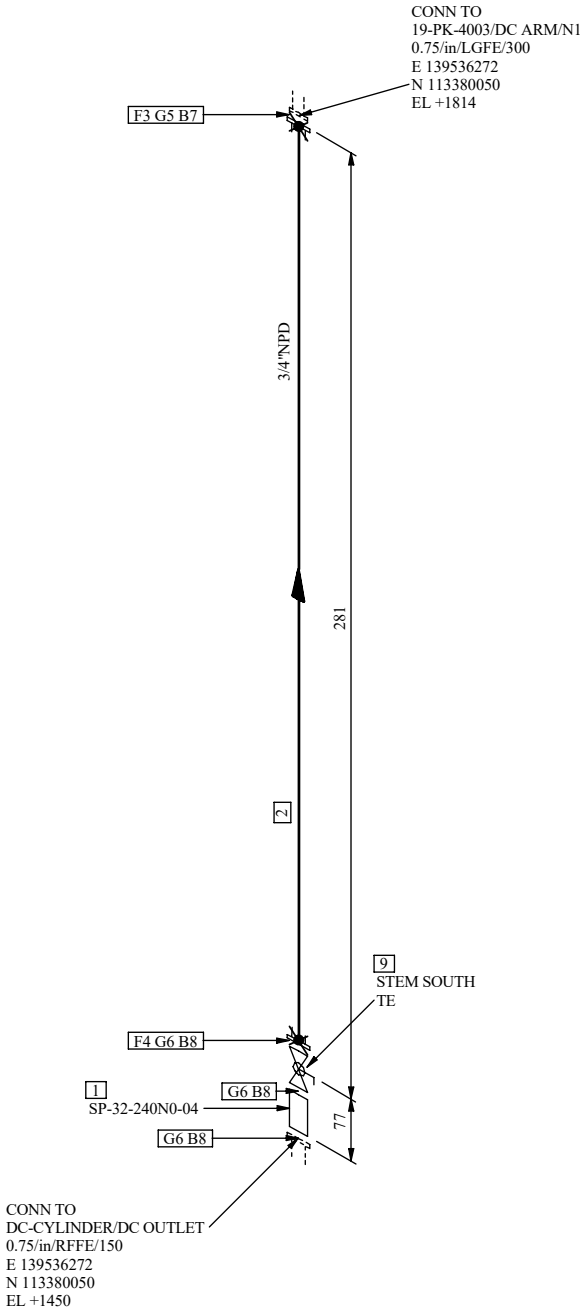


THIS DOCUMENT BELONGS TO REPSOL. IT CAN NOT BE COPIED, REPRODUCED AND/OR USED WITHOUT PREVIOUS AUTHORIZATION OF REPSOL. COMPUTERIZED DRAWING (HANDWRITING STRICTLY FORBIDDEN).


EXTR. DATE: 07-07-2023 13:11:14





STREAM NO.:4521

REV. CAUSE ID:



REMARKS FOR MECHANICAL SUBCONTRACTOR:

- 1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.
2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.
3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL  , ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT
4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603.
5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002.
6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED.
7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN.
8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603).
9) WHERE EARTHING BONDING IS REQUIRED, MECHANICAL SUBCONTRACTOR TO PERFORM IT BASED ON DOC. 45-P-000-7-06-00902/ 4274 -NN-DW-00000002 AND ASSEMBLY NO FEA005 AND FE019.

SUPPORTS LEGEND:  DENOTES PARTS LIST NO  PIPE SUPPORT  A=RESTING SUPPORT G=GUIDE F=AXIAL STOP B=ANCHOR M=SPRING S=TEFLON PAD
WHERE  WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.

							STRESS CALC. N°
							-
							P & ID 19-A-19-000-1-01-00001 sheet 44
00	ISSUED FOR REFERENCE	07-JUL-23	U.CHAVAN	P.VAZE	G.PAGANONI		LINE LIST N° 19-L-19-000-2-00-80602
REV.	DESCRIPTION	DATE	DRW. BY	CHECK BY	APPR. BY	APPR. CLIENT	PIPE LAYOUT N° 19-L-19-000-2-00-86196 sheet 1

ISSUED FOR
REFERENCE


Signature for construction is shown
on Iso list of relevant CWA

ISOMETRIC DRAWING
LINE

3/4"-DC-40N02-1C17

BILL OF MATERIAL

PT NO	COMPONENT DESCRIPTION	N.S. (IN)	ITEM CODE	QTY	HOLD STATUS
FITTINGS					
1	SPECIALTY COMPONENT	3/4	SP-32-240N0-04	1	
PIPE					
2	PIPE - A106-B PE SMLS T01AC03Z02 S-XS <PIPA010A13/4XS> (L-6679)	3/4	1132785	0.2 M	
FLANGES					
3	SW FLANGE ASME B16.5 300# A105N LTFE SWE 125 AARH MAX. F02CFC44E104 S-XS <N/A> (N/A)	3/4	I67122871	1	
4	SW FLANGE ASME B16.5 150# A105N RFFE SWE 125 - 250 AARH F02CDC44B105 S-XS <SWFA300R153/4XS> (L-295)	3/4	I5378342	1	
GASKETS					
5	FLAT RING GASKET ASME B16.21/AA 300# LTTBE SOFT COPPER ASME B16.5 G02UFT3AK01 <SMGQ002735B3/4> (L-SMG02)	3/4	I1169138	1	
6	SPIRAL WOUND GASKET ASME B16.20 150# RFTBE 304/GRAFOIL CARBON STEEL SS 304 ASME B16.5 G03GDP1IS12 <N/A> (N/A)	3/4	I63508895	3	
BOLTS					
7	STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I01OB0301 <SB2R51G5/831/4> - 2 NUTS PER BOLT - 80 mm Length	5/8	I53437418	4	
8	STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I01OB0301 <SB2R51G1/221/2> - 2 NUTS PER BOLT - 65 mm Length	1/2	I53437190	12	
VALVES / IN-LINE ITEMS					
9	BALL VALVE API 608 150# A216-WCB RFFE 316/R-PTFE, GF B7/2H 125 - 250 AARH 2PSB-FULL BORE FLOATING BALL OHW ASME B16.5 V04JDC29BZZG NREQD <N/A> (N/A)	3/4	I10013686	1	

PIPE MATERIAL	NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST. 2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102. 3. WELDING ACCORDING TO 45-L-45-000-2-00-80021. 4. PAINTING ACCORDING TO 45-A-45-000-1-00-20160. 5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "<N/A>" MEANS UNICODE IS "NOT AVAILABLE".		
CS			
HEAT TREATMENT (PWHIT)			
N			
PAINTING SCHEME (3)			
1	CONTRACTOR:	CONTRACTOR DRAWING NUMBER:	PROJECT:
PIPING CLASS		4274-XH-DL-2121DC40N02-6	4001008
IC17	LOW LINEAL DENSITY POLYETHYLENE (PEL) AND POLYPROPYLENE (PP) PLANTS CLIENT / COMPLEX		
WELDING CLASS (4)	AND POLYPROPYLENE (PP) PLANTS REPSOL POLYMEROS/ SINES INDUSTRIAL COMPLEX		
E	FOR PROJECT - ALBA PROJECT		
PED CATEGORY			
Art 4.3			
INSULATION CODE / THK. (mm)	ANNEX 19	SPEC. L	REV. 00
N 0	DRAWING NUMBER 19-000-2-02-00001 sheet 2121DC40N02-6		