


SF-4


DOUBLE BEARING SHOE FOR CLAMP (\* \* \*)  
Scarpa di appoggio doppia con bracciali

$D = 50 \div 272$

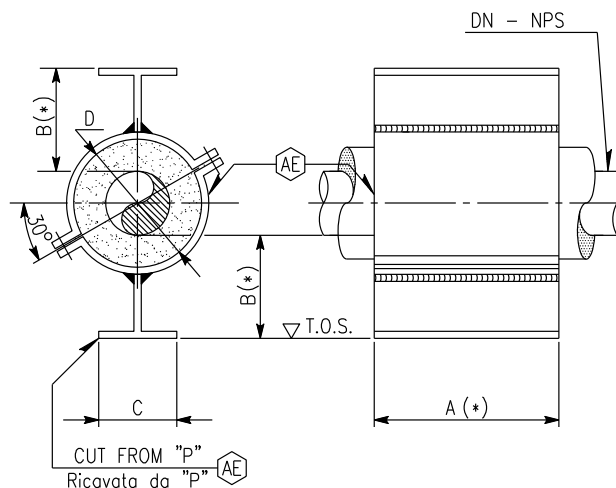

B(*)	P	C
150	IPE 300	150
250	PLATE	200


$D = 273 \div 356$

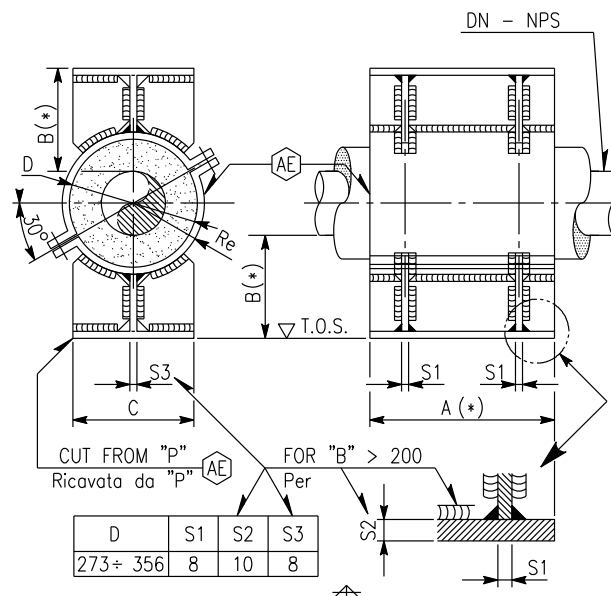

D	S1	S2	S3
273 ÷ 356	8	10	8


$D = 357 \div 712$

CUT FROM PLATE (EXCEPT CLAMPS) (NC)  
Ricavata da lamiera (tranne bracciali)

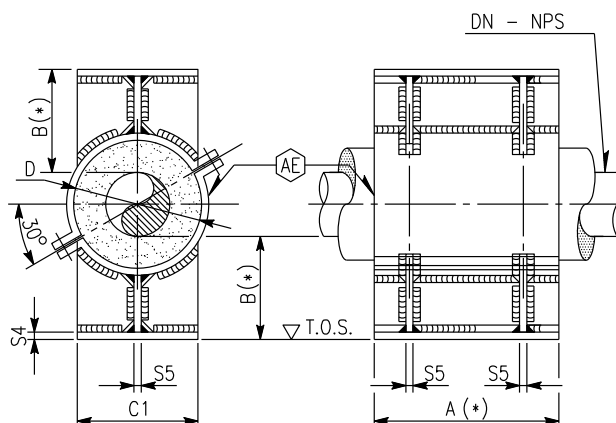

$D = 713 \div 930$

CUT FROM PLATE (EXCEPT CLAMPS) (NC)  
Ricavata da lamiera (tranne bracciali)

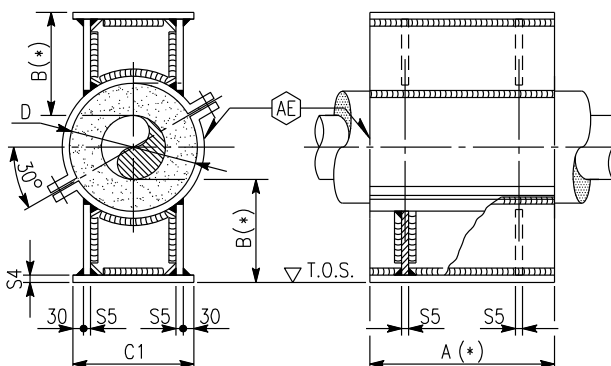

(\*) STANDARD DIMENSION DEFINED DURING DESIGN.

(\* \*) SUGGESTED DIMENSION TO BE CONSIDERED AS REFERENCE BY THE MANUFACTURER.

(\* \* \*) SUGGESTED SHOE ASSEMBLY TO BE CONSIDERED AS REFERENCE BY THE MANUFACTURER.

D	C1	S4	S5
357 ÷ 406	200	12	10
407 ÷ 610	300	14	12
611 ÷ 813	400		
814 ÷ 930	500		



CLAMP SF-1, SF-2  
Bracciale SF-1, SF-2

Questo documento è proprietà di Tecnimont e non può essere utilizzato in alcun modo da terzi senza preventiva autorizzazione

THIS DOCUMENT IS TECNIMONT'S PROPERTY AND CANNOT BE USED BY OTHERS FOR ANY PURPOSE, WITHOUT PRIOR WRITTEN CONSENT