




JOINT OPTION
Variante di attacco (5a)

08

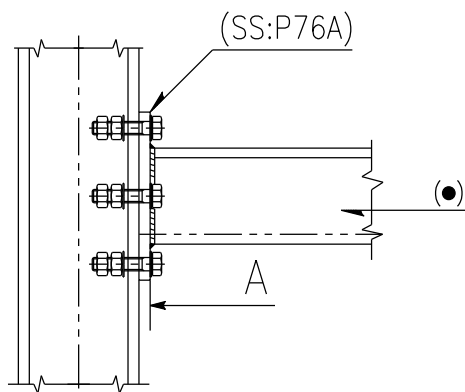


NOTE:

P76A shall be used when the local axis of section of support is parallel to the GLOBAL axis of structural beam




09

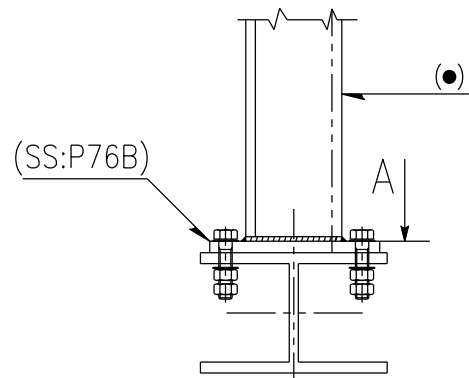


NOTE:

P76B shall be used when the local axis of section of support is perpendicular to the GLOBAL axis of structural beam



10

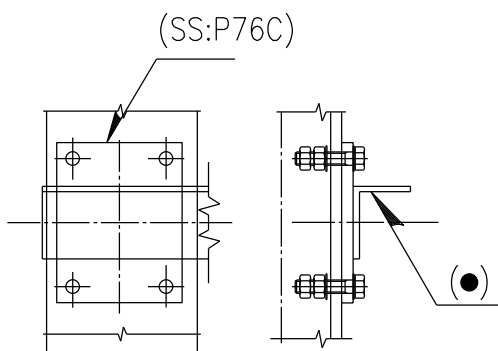

NOTE:

JOINT OPTION 08-09
VALID FOR SB01/SB03/SB04/SB05

JOINT OPTION 10
VALID FOR SB01/SB03