
CLINICAL APPLICATIONS

Chest Radiography

Superior visualization of lung fields, mediastinal structures, and bony thorax with enhanced contrast resolution



Orthopaedic Imaging

Precise delineation of fractures, joint spaces, and implants with exceptional spatial resolution. Seamless spine stitching with high-precision, full-spine imaging using our advanced Flat Panel Detector.









Bedside Examinations

Portable solutions for immobile patients with immediate image verification

Emergency Procedures

Rapid acquisition for time-critical trauma cases with wireless flexibility



FLAT PANEL DETECTORS

*1st Made in India**

CONTACT US

Registered Office

2nd Floor, Refex Towers, Sterling Road Signal,
313, Valluvar Kottam Hight Road,
Nungambakkam, Chennai 600 034

Business Office

67, Bazullah Road,
T.Nagar, Chennai 600 017

Manufacturing Plant

3i Medical Equipment Manufacturing Pvt. Ltd.
Biome building, Andhra Pradesh MedTech Zone (AMTZ),
AMTZ Campus, VM Steel Project S.O, Pragati Maidan,
Visakhapatnam 530031, Andhra Pradesh

Contact Numbers

9444026307 | 9930092432| 9962040668

Email

info@3imedtech.com

REVOLUTIONIZING DIGITAL RADIOGRAPHY

The DReam Retrofit Flat Panel Detector is designed for high-resolution imaging, streamlined workflow, and exceptional reliability. Offering both wireless and wired connectivity, it supports diverse clinical scenarios—from trauma and bedside imaging to routine diagnostics. Its advanced design ensures superior image quality, seamless system integration, and improved patient care across all healthcare settings.






TECHNICAL SPECIFICATIONS

DReam Panel Series	Dream 17x17 Wired*	14x17 Wireless
Detector Type	Amorphous Silicon TFT	
Scintillator	Cesium Iodide (CsI)	
Dimensions	460 x 460 x 15 mm	460 × 384 × 15 mm
Active Detector Matrix	3,040 × 3,036 pixels	3,040 * 2,466 pixels
Effective Area	425.6 mm x 425.04 mm	425.6 mm * 345.24 mm
Pixel Pitch	140 um	
A/D Conversion	16 bits	
Spatial Resolution	3.57 lp/mm	
DOE MTF	76% (0 lp/mm, Typical)	
Installation	84% (0.5 lp/mm, Typical)	
Image Acquisition	Tethered/ Wireless	
AED	Available	
Weight	Approx. 3.7 kg	Approx. 3.2 kg
Max. Load Capacity Dust/Water-Resistance	150 kg for uniform load, 100 kg for local load (40 mm in diameter disk at the center)	
Dust/Water Resistance	IP56	
Shock Logging	Temperature sensor, Real time shock detection Logging of shock levels	
Battery Charging Time	Typ. 6 hrs. (tethered) Typ. 3 hrs. (battery charger)	
Battery Operation Time	160 images for 4 hrs.	

**CDSCO approved for manufacturing wired FPD*

FLAT PANEL BRILLIANCE

-Powered by Innovation

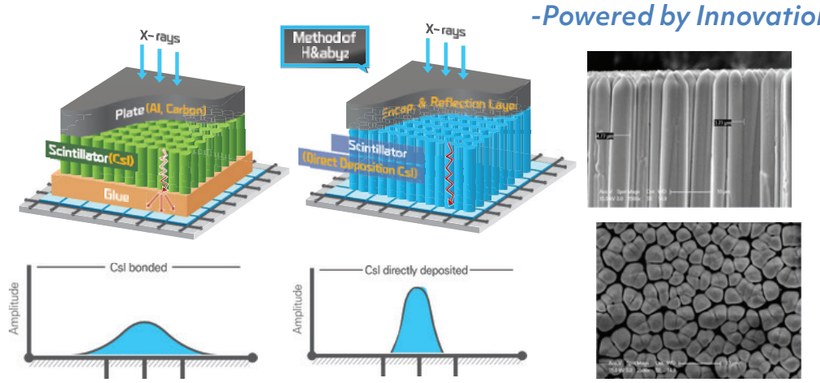

3iMedTech's HaaP CsI is H&abyz's proprietary in-house coating technology for direct and indirect deposition of CsI:Tl on the following substrates : a-Si, IGZO panels, as well as polymer substrates (for glass-free detectors), CMOS wafers, optical fibre & aluminium plates. H&abyz is a major supplier of this technology to other multinational digital radiography manufacturers.

KEY FEATURES

Auto optimization and consistent image quality

Superior Image Quality: Advanced Amorphous Silicon TFT and needle-structured CsI scintillator deliver high-resolution, low-dose imaging for accurate diagnosis.
Wide Dynamic Range: Clear visualization of both soft tissues and dense structures.

Durability and Reliability

Lightweight & Durable: 3.2 kg (wireless) and 3.7 kg (wired), supports 150 kg distributed load.
Long Lifespan: Designed for years of consistent performance.
Low Maintenance: Solid-state technology reduces service requirements.
Temperature Stability: Reliable operation under various conditions with high temperature indication.

Advanced Technology

High Detective Quantum Efficiency (DQE): High DQE with MTF up to 84% ensures superior contrast at minimal radiation.
Minimal Image Lag: Perfect for real-time and dynamic imaging with diagnostic image reconstructio in 2 seconds.

Efficiency and Workflow Optimization

Rapid Image Acquisition: Instantly access high-quality images.
Clinical Versatility: Available in 17x17 wired and 14x17 wireless formats for fixed, mobile, bedside, and trauma use.
Auto Exposure Detection (AED): Seamless operation without manual triggering.
Faster Readout Speeds: Boost throughput and patient care.

Seamless Integration and Smart Performance

Seamless PACS Integration: Effortless digital storage, sharing, and retrieval.
DICOM interface for export of images to any licensed network
Smart Processing: Advanced algorithms enhance soft tissue and bone in one shot, reducing retakes and supporting ALARA compliance.