

RS100-8

4" Reference Full-Range Driver





Features

- Lightweight black anodized aluminum cone
- Attractive 6-hole cast frame
- Advanced low distortion motor design
- Solid aluminum phase plug
- Rubber surround
- Full-range capability


Parameters

Impedance (Ω)	8
Re (Ω)	6.05
Le (mH) @ 1 kHz	0.48
Fs (Hz)	87.5
Qms	2.52
Qes	0.71
Qts	0.55
Mms (g)	2.6
Cms (mm/N)	1.27
Sd (cm ²)	37.4
Vd (cm ³)	13.1
BL (Tm)	3.5
VAS (liters)	2.5
XMAX (mm)	3.5
VC Diameter (mm)	25.9
SPL (dB@1W/1m)	85.6
RMS Power Handling (w)	30
Usable Frequency Range (Hz)	87 - 20,000

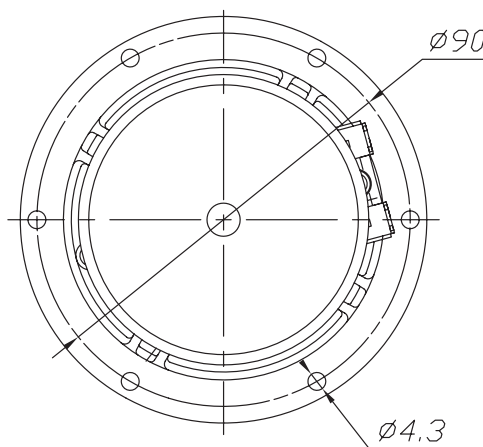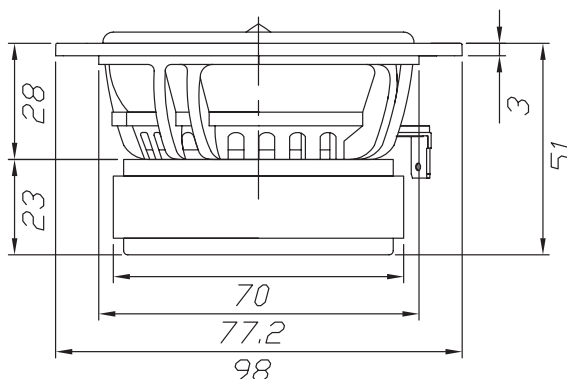

Note: All dimensions in mm.

Frequency Response

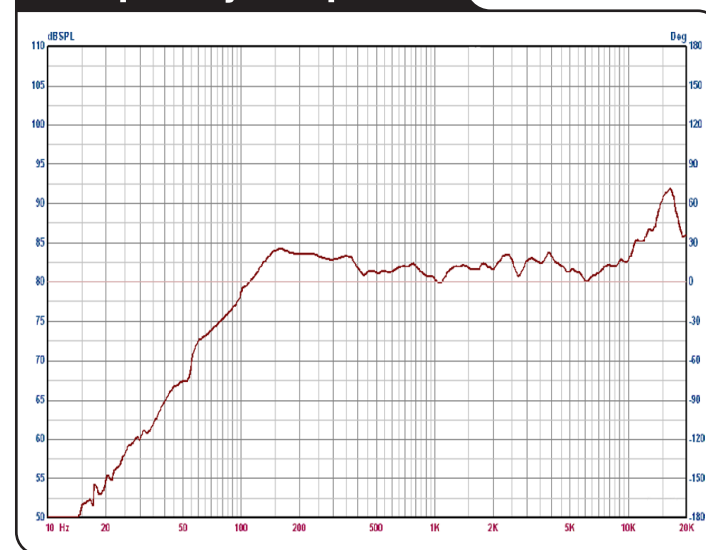

Impedance/Phase

