

1 Introduction

The Muon Forward Tracker (MFT) is a new detector added to ALICE at CERN for Run 3. Its primary use is to add vertexing capabilities to the Muon Spectrometer in the forward region of ALICE. With Run 3 comes a new analysis framework, called Online-Offline (O2), which is better suited to the new ways in which data will be taken for Run 3. This report aims to use O2 to have a “look-see” at data coming from the MFT to see if everything is behaving properly. The data used in this investigation is from two proton-proton collision runs performed in October 2021, at a centre-of-mass energy of 900 GeV. This is a non-nominal energy — Run 3 is designed to run at 13.6 TeV — but is good enough for our purposes.

2 Background

The ALICE detector (A Large Ion Collider Experiment) is a detector experiment at the Large Hadron Collider (LHC) at CERN. Its primary goal is the investigation of “strongly interacting matter at extreme energy densities, where a formation of a new phase of matter, the quark-gluon plasma, is expected” [3]. It achieves this goal by studying the products of head-on collisions of heavy ions such as lead, called Pb-Pb collisions for short. It also studies proton-lead (p-Pb) and proton-proton (p-p) collisions.

2.1 Coordinates

The coordinate system used at ALICE needs to be discussed in order to fully explain the scope of this report. A modified cylindrical coordinate system, shown in figure 2.1, is used as most detectors in the experiment are cylindrically symmetric about the beamline of the LHC.

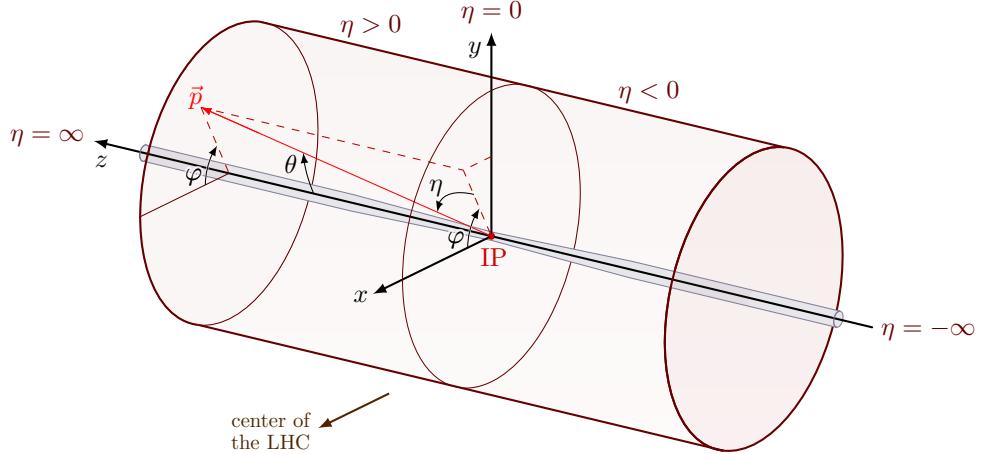


Figure 2.1: Modified cylindrical coordinate system used at the LHC [6]

We place the z -axis along the beamline with its origin at the interaction point (IP). The IP is the point at which collisions happen, right in the center of the detector. The angle around the z -axis is called the azimuthal angle, denoted by φ . Sometimes ϕ ranges from 0 to 2π , and sometimes it ranges from $-\pi$ to π . We will try stay consistent and use the latter in this report, but we may need use the other convention at times. The angle from the z -axis to the $x - y$ plane is called the

polar angle, denoted by θ . θ runs from 0 to π . We are interested in the standard 3-momentum of particles that we track in the detector, which we call $\vec{p} = (p_x, p_y, p_z)$, but we also define the transverse momentum as

$$p_T = \sqrt{p_x^2 + p_y^2}. \quad (2.1)$$

We define the rapidity, often denoted as y , as

$$y = \frac{1}{2} \ln \left(\frac{E + p_z}{E - p_z} \right) \quad (2.2)$$

where E is the total energy of the particle being considered and p_z is the momentum in the z direction [4]. This quantity is useful as differences in rapidity are Lorentz invariant for boosts along the z -axis. One issue, however, is that the energy of a particle is hard to measure, so we instead use pseudorapidity, denoted as η . Rapidity and pseudorapidity are equivalent for massless particles, and near equivalent for particles with total 3-momentum magnitude p much greater than their mass m . Pseudorapidity is much easier to measure as it is defined as [4]

$$\eta = -\ln \tan \frac{\theta}{2}. \quad (2.3)$$

From figure 2.1 we see that for z positive, η is also positive, and similarly for z negative. Confusingly, we define the “forward region” of the ALICE detector as the region for which z , and thus η , are negative.

2.2 ALICE Run 3

In 2018, the LHC shut down for what was called Long Shutdown 2 (LS2). During this time, the ALICE experiment was being prepared for what is called Run 3, where it will be taking data at much higher rates and much higher energies than before [1]. Figure 2.2 shows the detector configuration for Run 3. The intent of these upgrades was in large part to prepare ALICE for higher frequency collisions in both Pb-Pb and p-p cases.

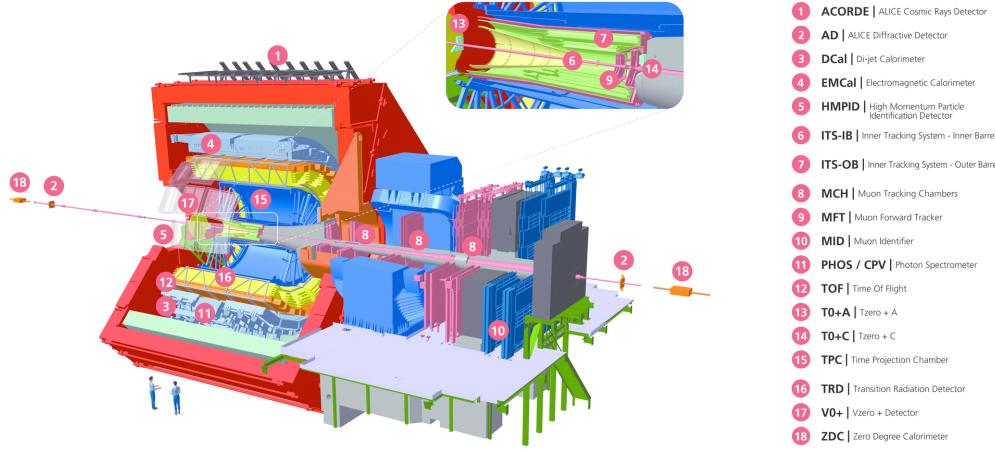


Figure 2.2: ALICE Run 3 schematic

Part of the upgrades for Run 3, the details of which can be found in [1], were a whole new Inner Tracking System (ITS) and a brand new detector called the Muon Forward Tracker (MFT). These detectors are both silicon-based and their primary purpose is tracking particles.

The readout electronics for many detectors were also upgraded to allow for continuous readout as opposed to triggered readout. The MFT, however, will still work on a triggered readout system as ***I THINK BECAUSE EVENTS ARE LESS COMMON DUE TO THE ABSORBER BUT IDK FOR SURE.***

2.3 The Muon Spectrometer

The Muon Spectrometer (***MCH or MUON, not sure***) sits in the forward region of ALICE, as seen in figure 2.2. It is designed to study heavy quark resonances through their single- and di-muon decay channels

As is shown in figure 2.3, it is composed of an absorber, tracking chambers, a dipole magnet, and finally the trigger chambers, often called the Muon Identifying Detector (MID) [maybe]. The MFT is also considered part of the MCH but is not shown in figure 2.3. The absorber serves to filter out all particles travelling towards the MCH that are not muons as muons interact very rarely with matter. The 5 tracking chambers track the path of the muons before, during, and after they are bent by the dipole magnet. These tracking chambers used to do the job of the MFT in Run 1 and Run 2, but with the increase in luminosity and energy of the LHC in Run 3, the MFT needed to be added in order to vastly improve the vertexing capabilities. Lastly, the trigger system consists of two large gas chamber detectors which trigger only when a muon is detected.

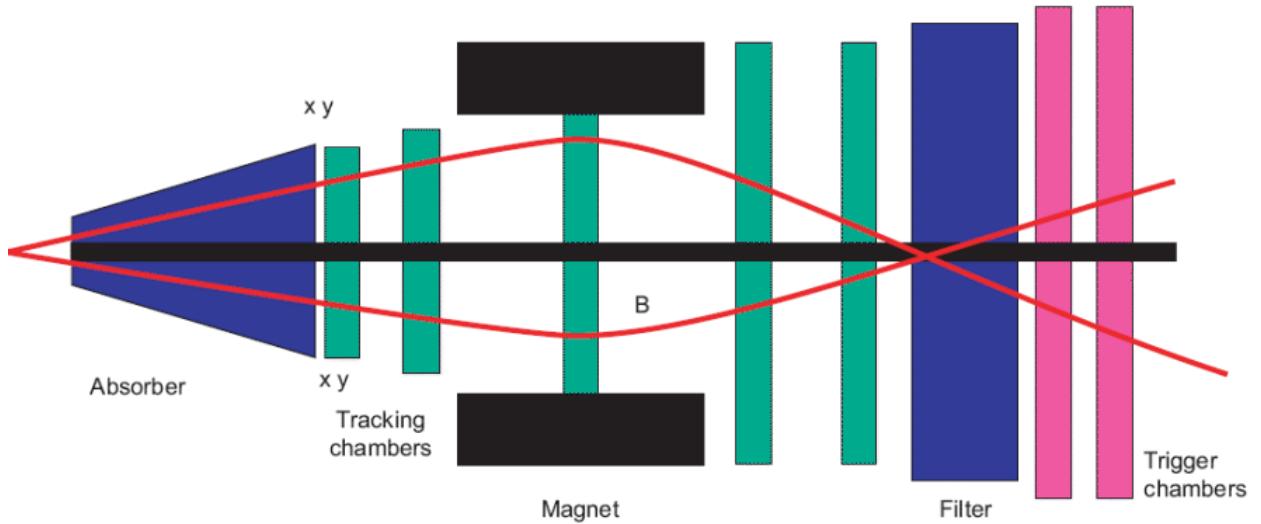


Figure 2.3: Muon Spectrometer Diagram [5]

2.4 The Muon Forward Tracker

The MFT is a brand new detector added to ALICE for Run 3. It serves as a tracking detector for the Muon Spectrometer (***MCH or MUON, not sure***), which sits in the forward region ($-4 < \eta < -2.5$). The MFT was made in conjunction with the ITS and uses precisely the same silicon CMOS sensors but in a different configuration to better suit the geometry of the problem. At its closest point, the MFT is only 46.0 mm from the IP, and 76.8 cm at its furthest.

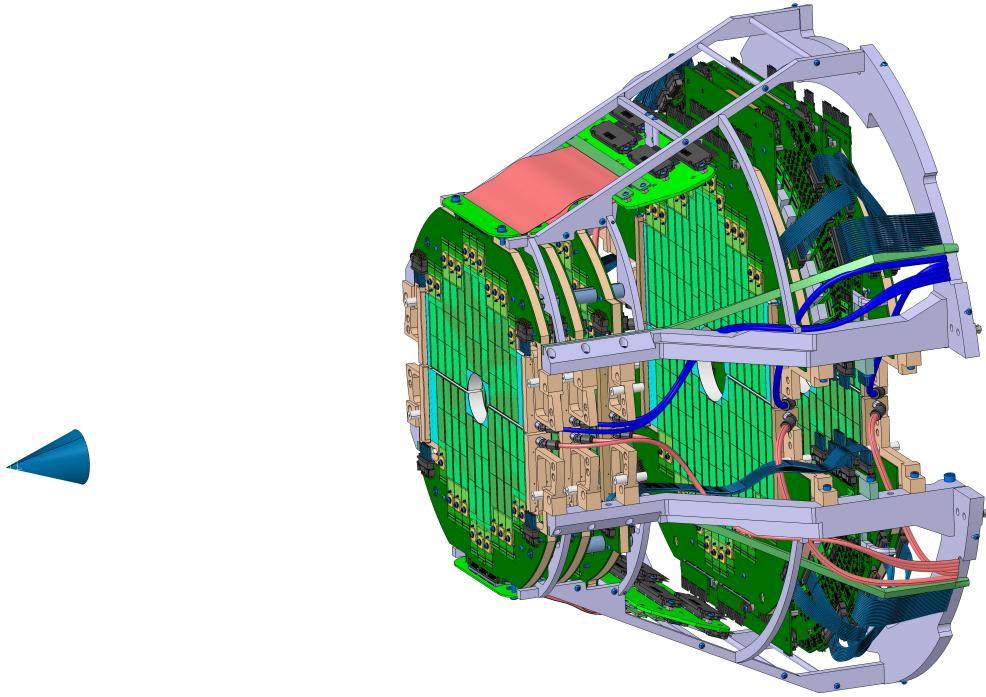


Figure 2.4: Muon Forward Tracker schematic [2]

2.5 The Inner Tracking System

2.6 The Online-Offline Analysis Framework (O2)

References

- [1] B Abelev et al. *Upgrade of the ALICE Experiment: Letter of Intent*. Tech. rep. Geneva: CERN, Aug. 2012. DOI: 10.1088/0954-3899/41/8/087001. URL: <https://cds.cern.ch/record/1475243>.
- [2] MFT Collaboration ALICE. *ALICE Muon Forward Tracker (MFT)*. CERN Bulletin. Number: OPEN-PHO-EXP-2020-004. Dec. 25, 2020. URL: <https://cds.cern.ch/record/2748310> (visited on 07/17/2022).
- [3] *Letter of Intent for A Large Ion Collider Experiment [ALICE]*. Tech. rep. Geneva: CERN, 1993. URL: <https://cds.cern.ch/record/290825>.
- [4] Deepak Kar. *Experimental Particle Physics*. 2053-2563. IOP Publishing, 2019. ISBN: 978-0-7503-2112-9. DOI: 10.1088/2053-2563/ab1be6. URL: <https://dx.doi.org/10.1088/2053-2563/ab1be6>.
- [5] *Muon Spectrometer - ALICE Collaboration*. URL: https://alice-collaboration.web.cern.ch/menu_proj_items/Muon-Spect (visited on 07/17/2022).
- [6] Izaak Neutelings. *CMS coordinate system*. URL: https://tikz.net/axis3d_cms/ (visited on 07/14/2022).