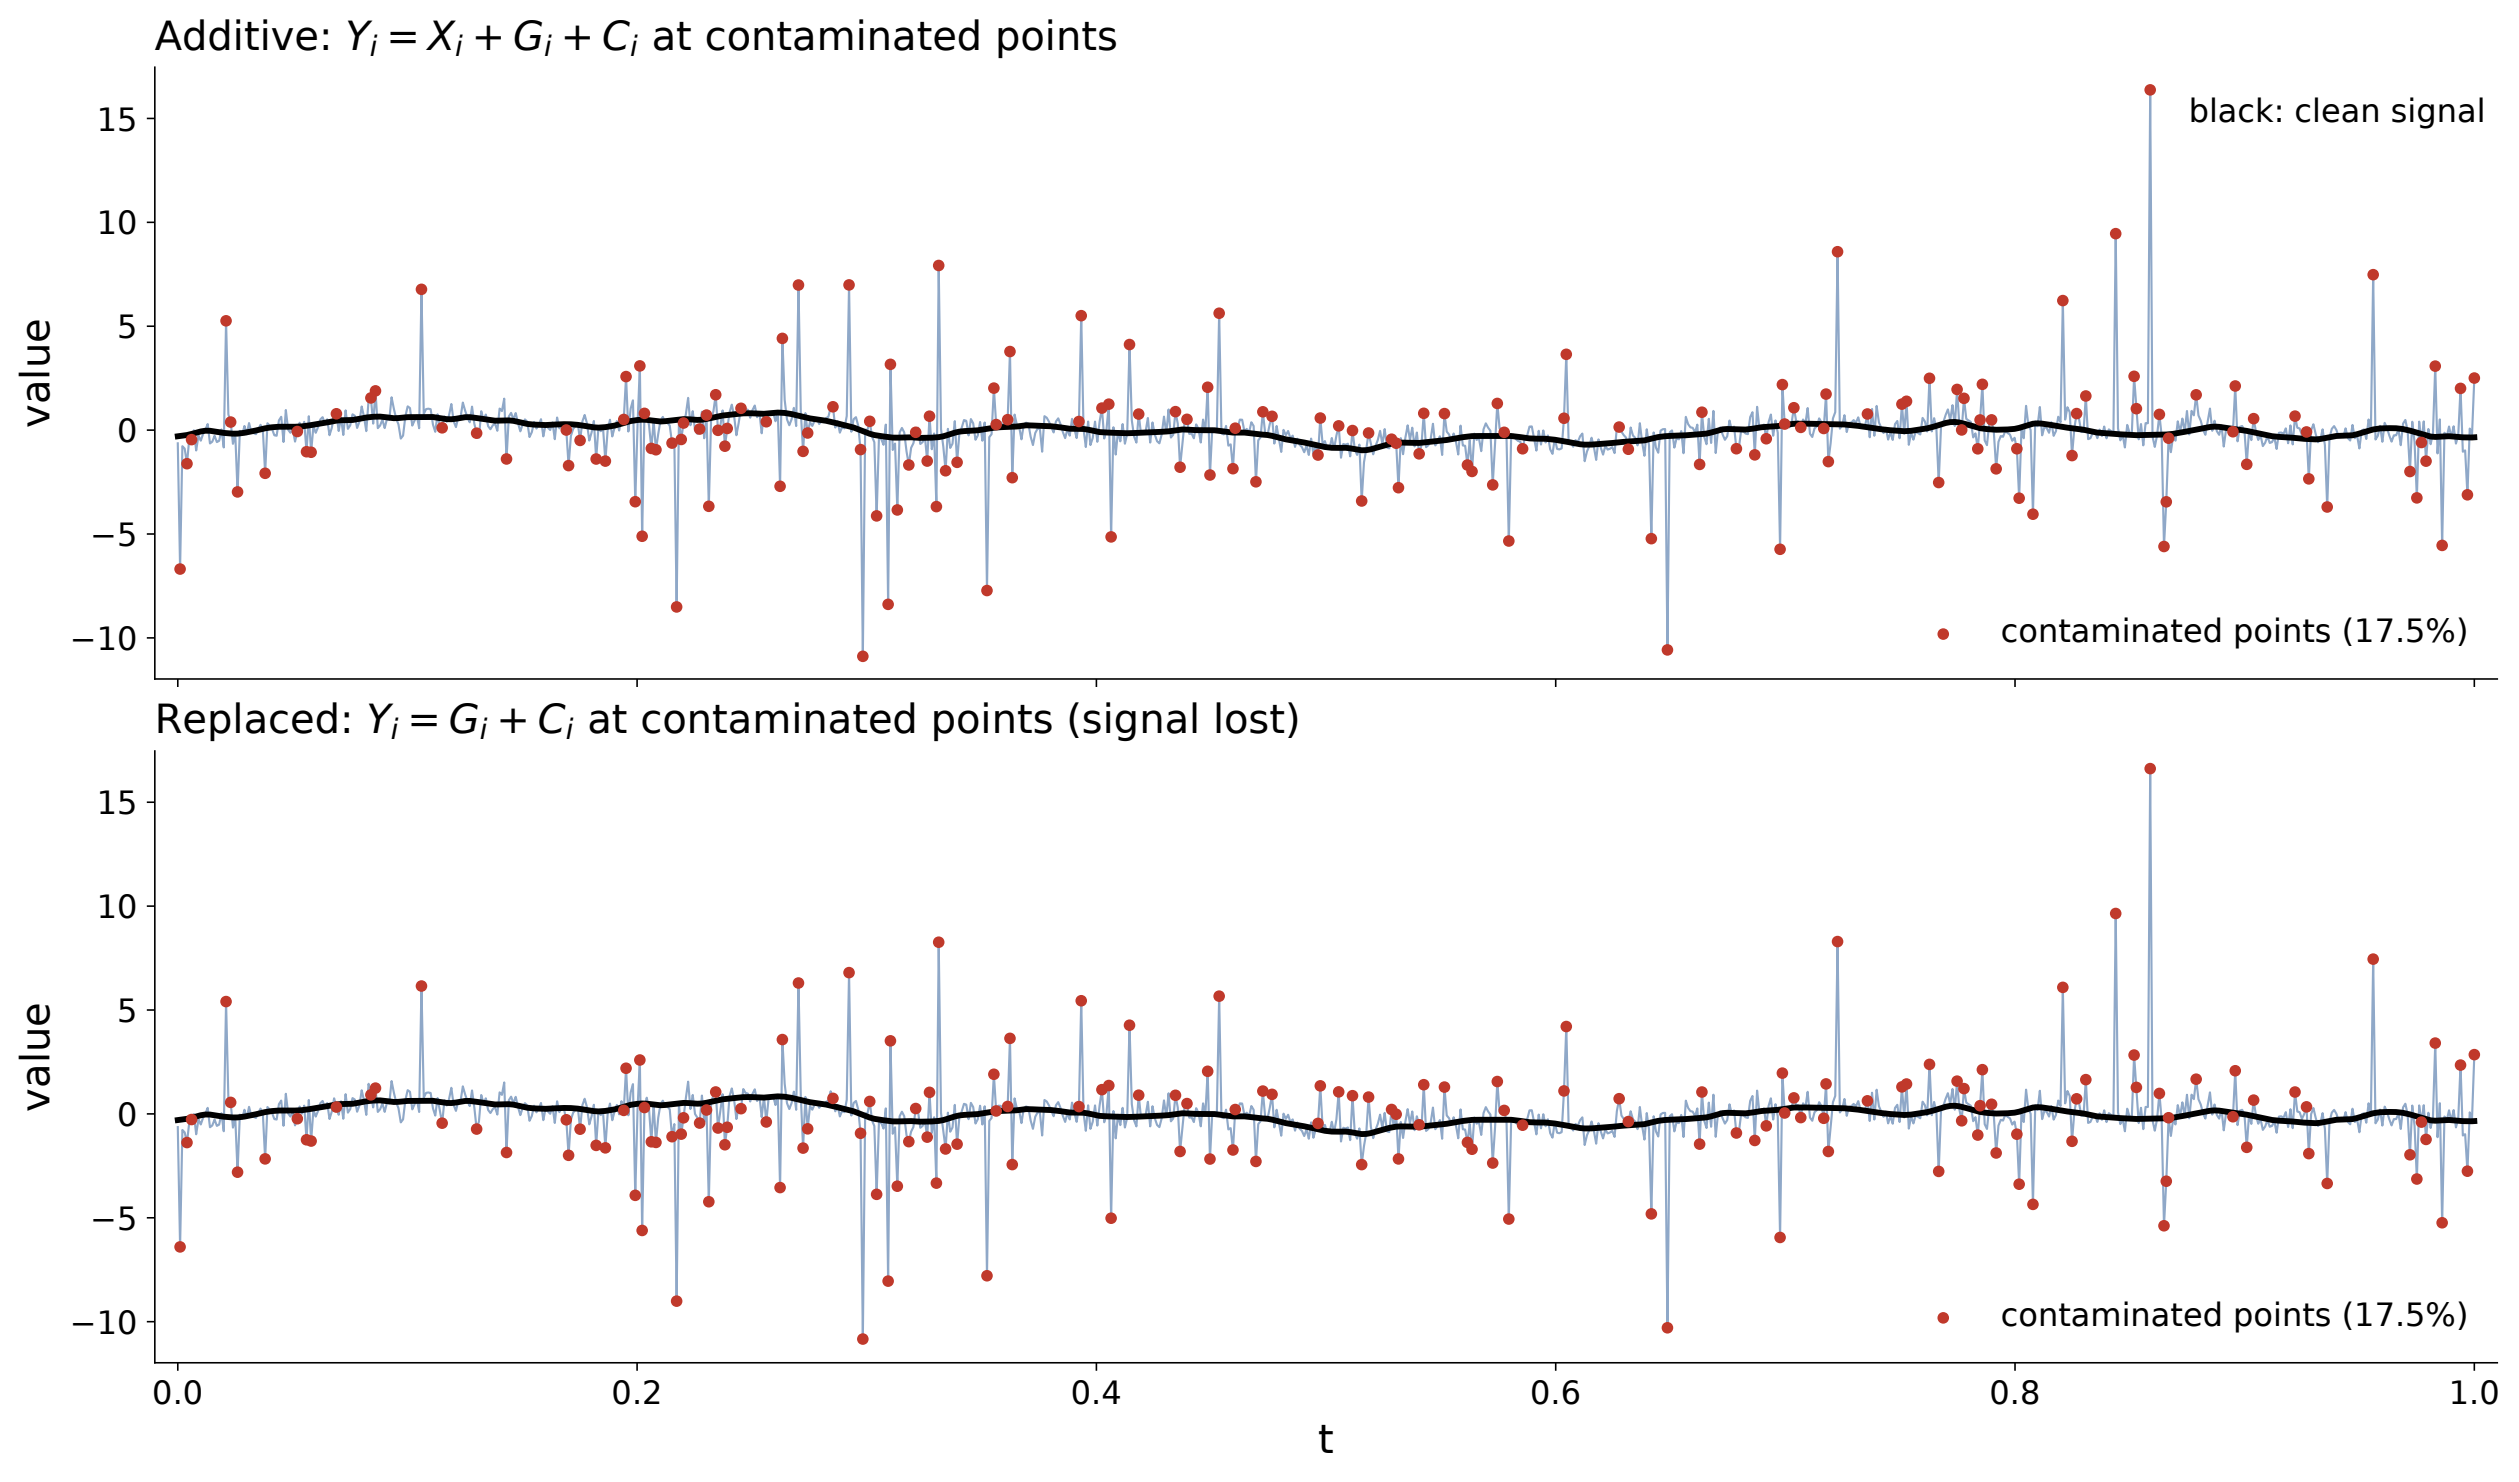
Additive: $Y_i = X_i + G_i + C_i$ at contaminated points
black: clean signal
contaminated points (17.5%)
Replaced: $Y_i = G_i + C_i$ at contaminated points (signal lost)
contaminated points (17.5%)
value
value
t
15
10
5
0
−5
−10
0.0
0.2
0.4
0.6
0.8
1.0