




USB-C connector and ESD protection

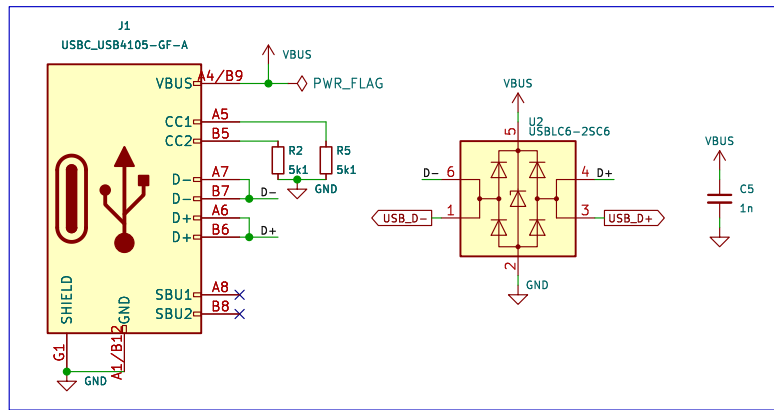


SD card interface (USB to SDCard reader and USB-bridge to FTDI)

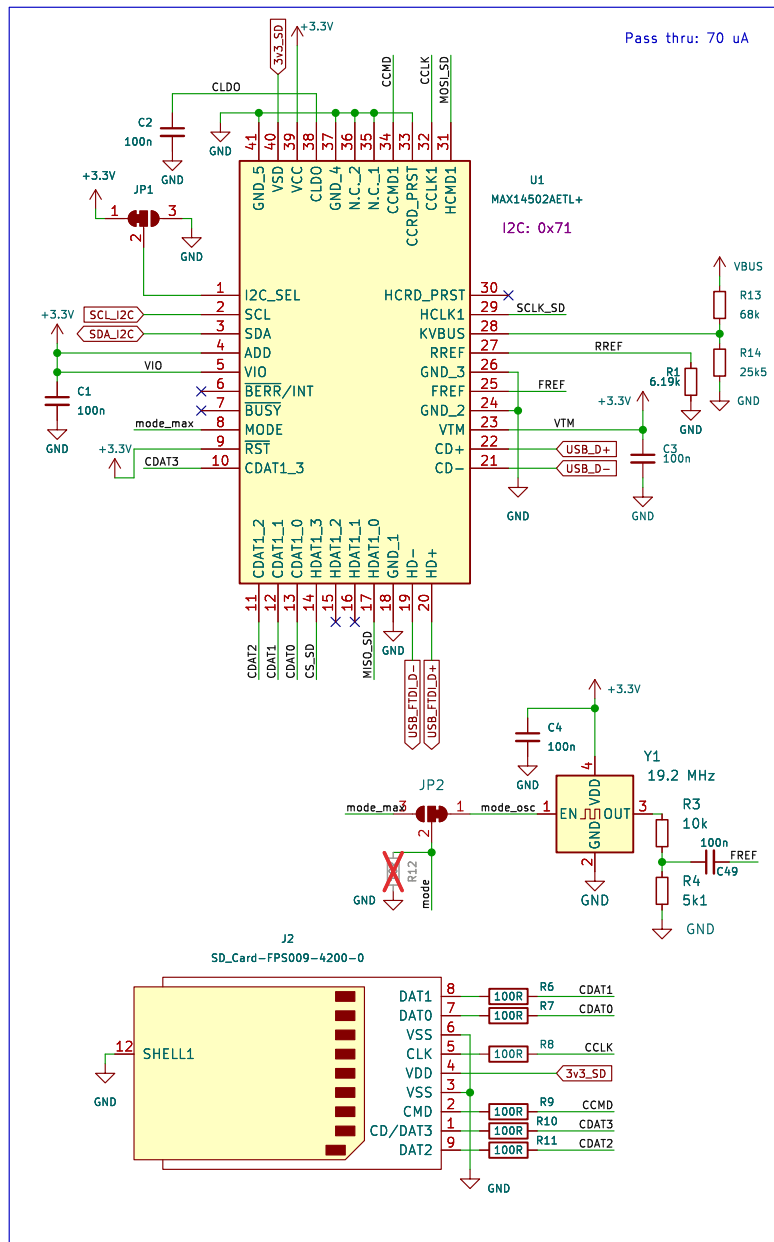


Mechanical

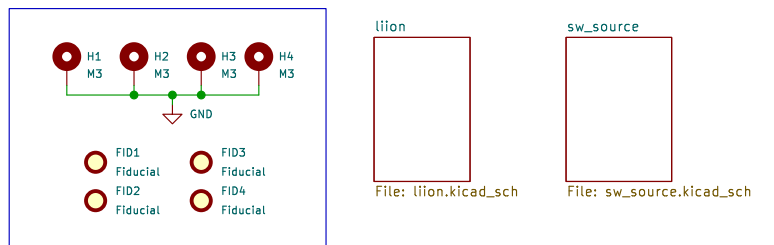


User interface (LED indicators, Buttons)

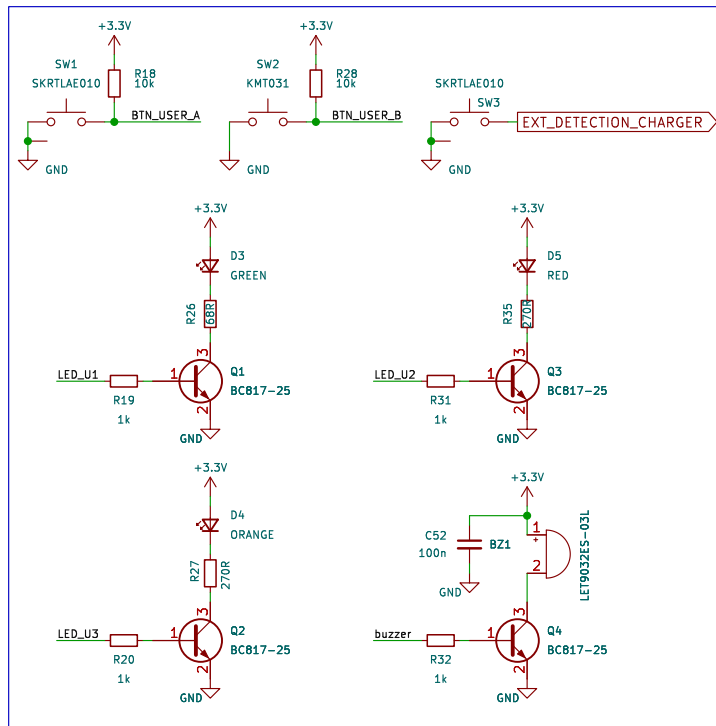


FTDI (USB to UART and I2C)

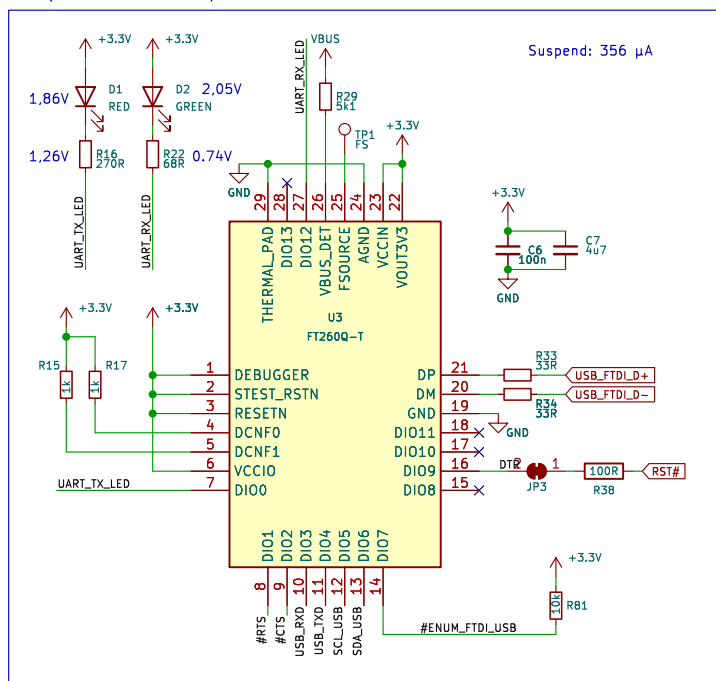


I2C master selector (from FTDI or ATmega)

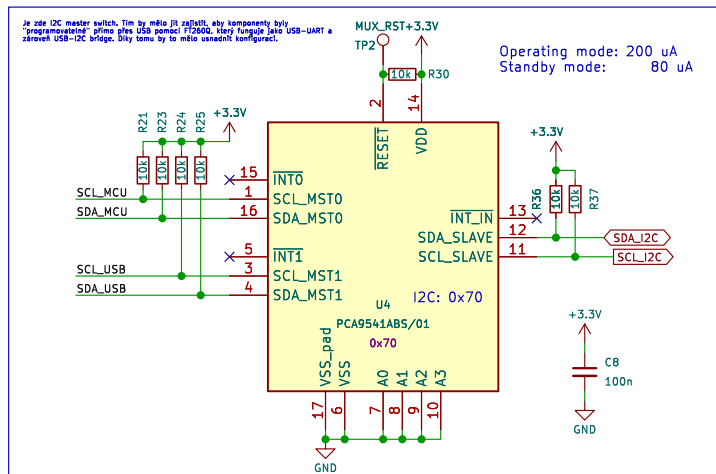


I2C sensors and accessories (hygrometer, altimeter, eeprom, RTC)

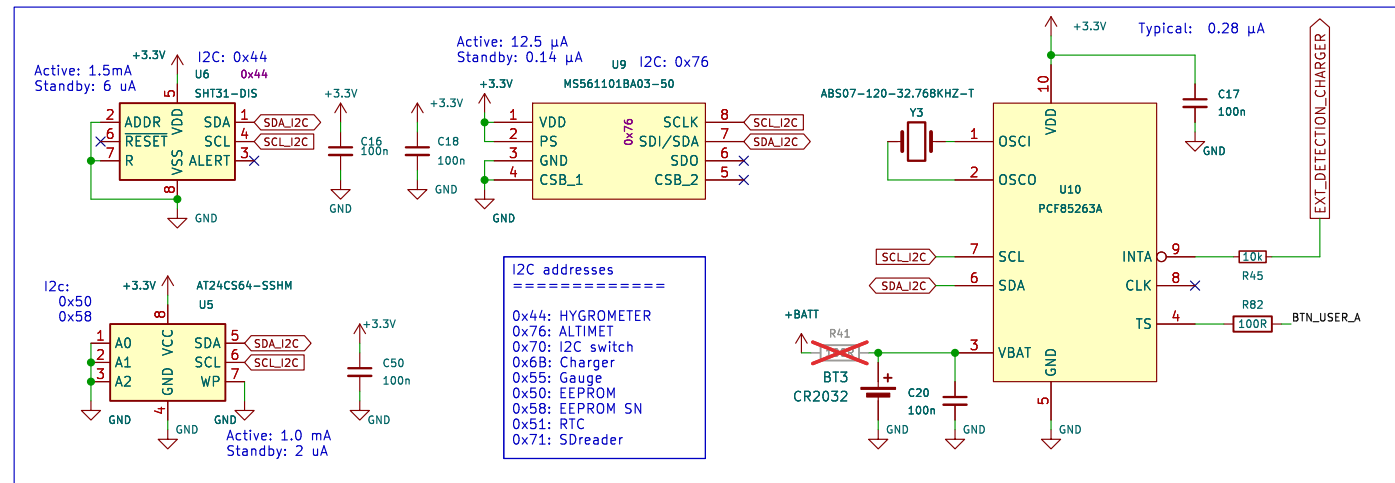


ATmega 1284p microcontroller

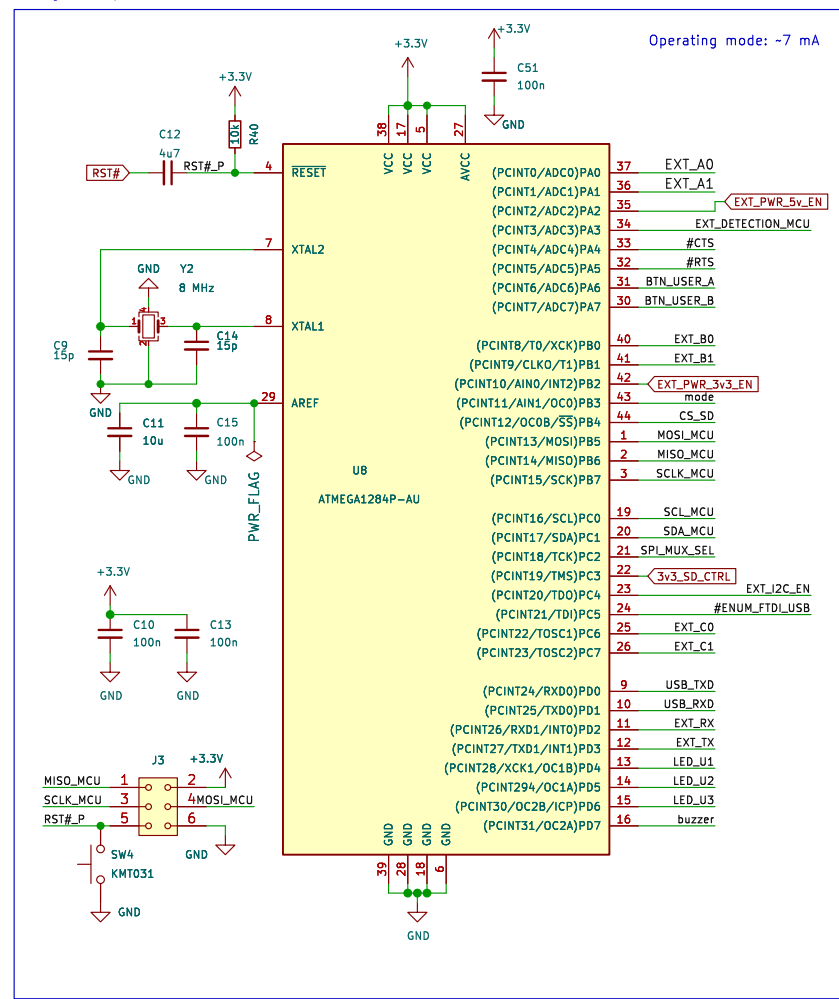


I2C buffer, allows to unconnect external I2C

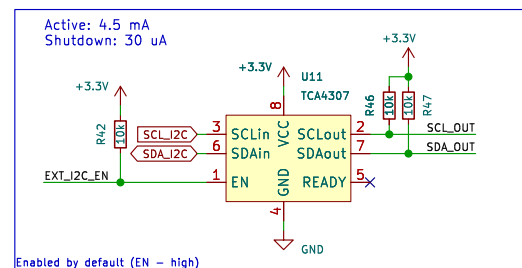


Connector to sensor board

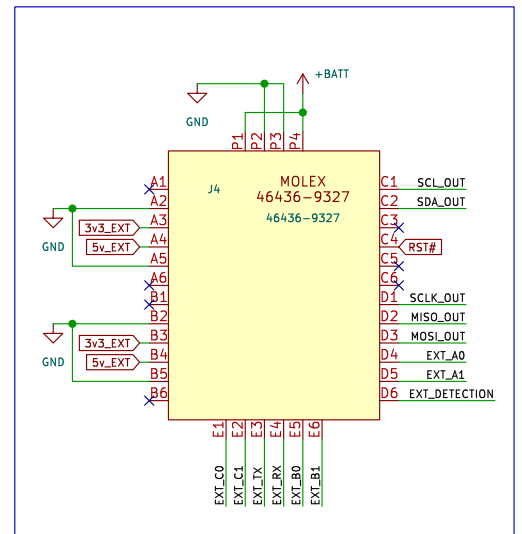

Auto-power up circuit

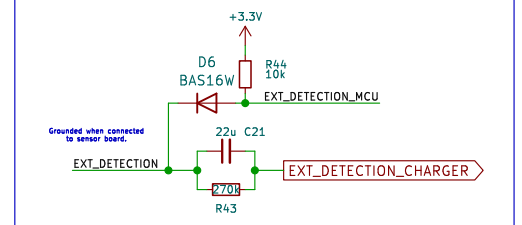

SPI-MUX (switching SPI from MCU to SDCard or to detector ext. connector)

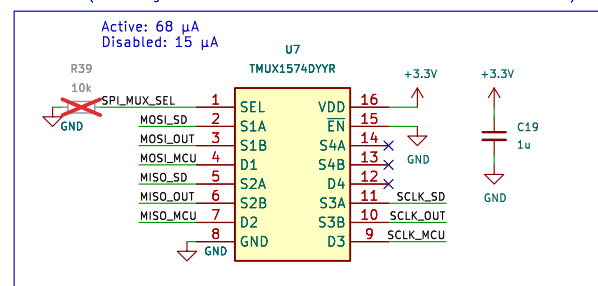

Title: BATDATUNIT01C


Universal power and data storage unit.

Author: MLAB.cz, roman-dvorak

Size: A3 Page: 1/3 Date: 2025-07-11



FUEL GAUGE

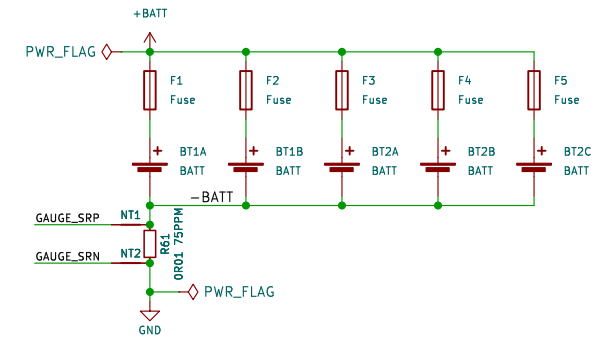

Date: 2025-07-11

