




USB-C connector and ESD protection

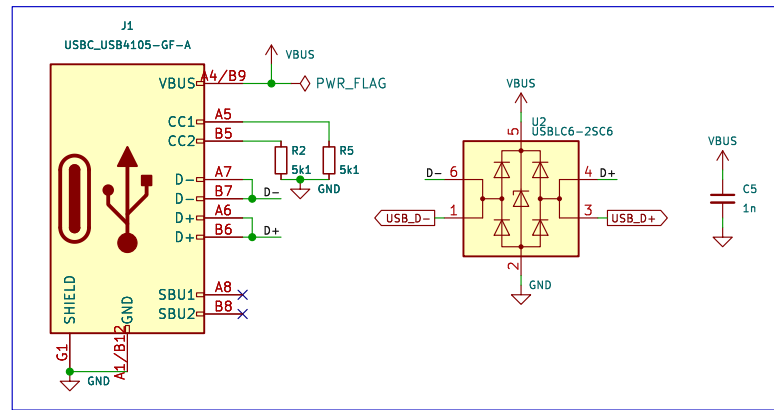


SD card interface (USB to SDCard reader and USB-bridge to FTDI)

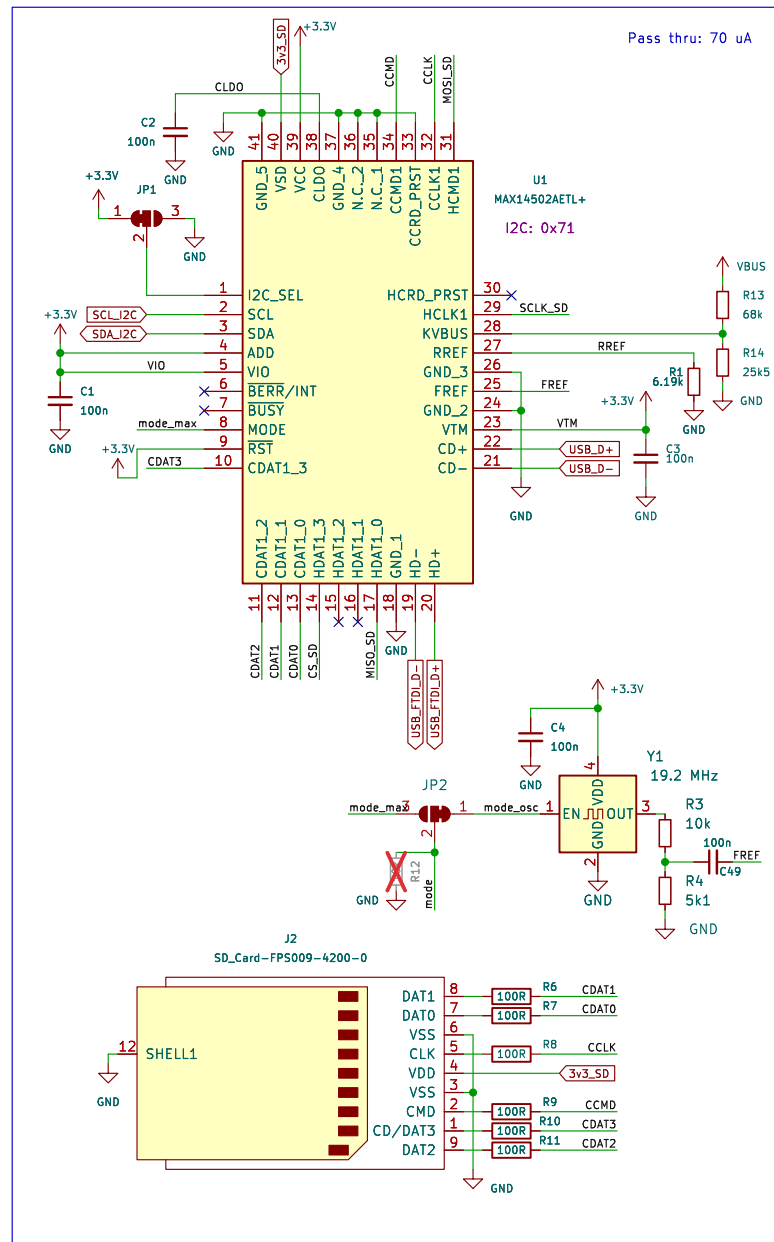


Mechanical

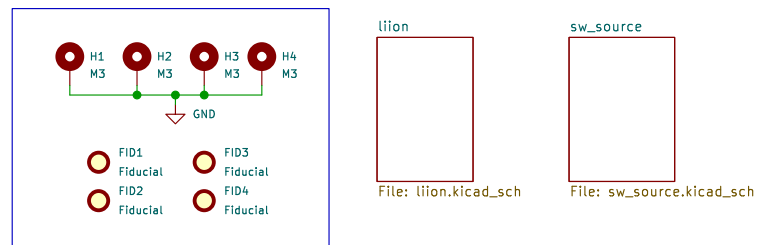


User interface (LED indicators, Buttons)

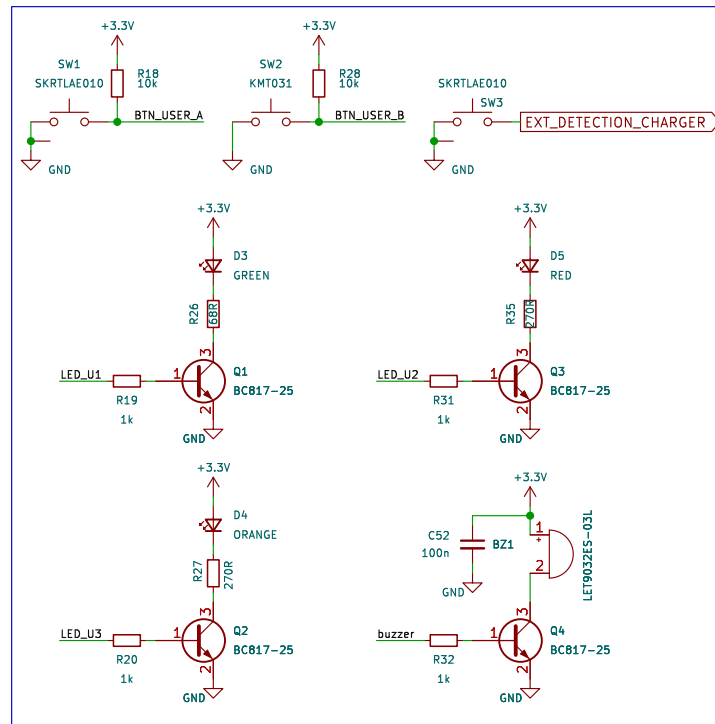


FTDI (USB to UART and I2C)

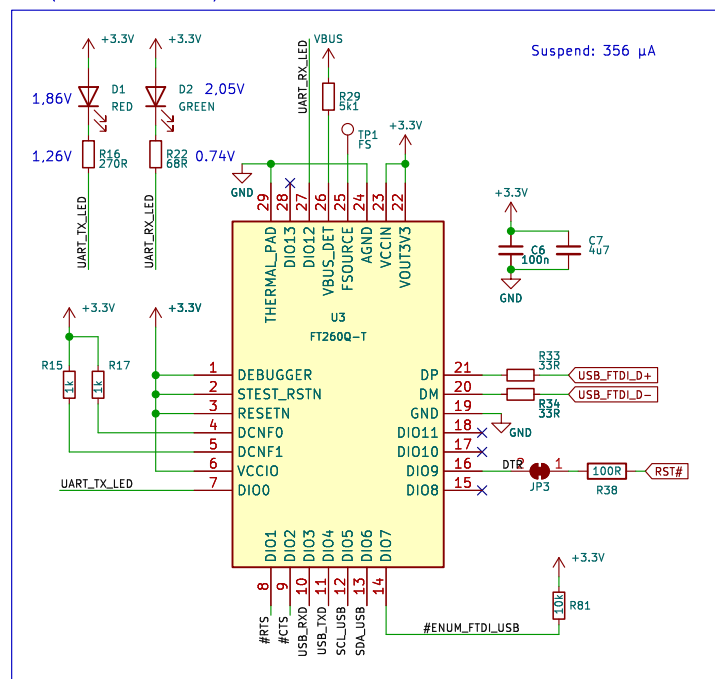


I2C master selector (from FTDI or ATmega)

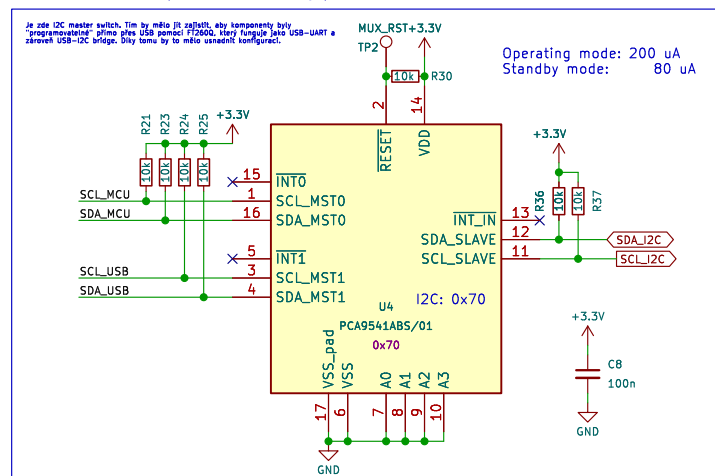


I2C sensors and accessories (hygrometer, altimeter, eeprom, RTC)

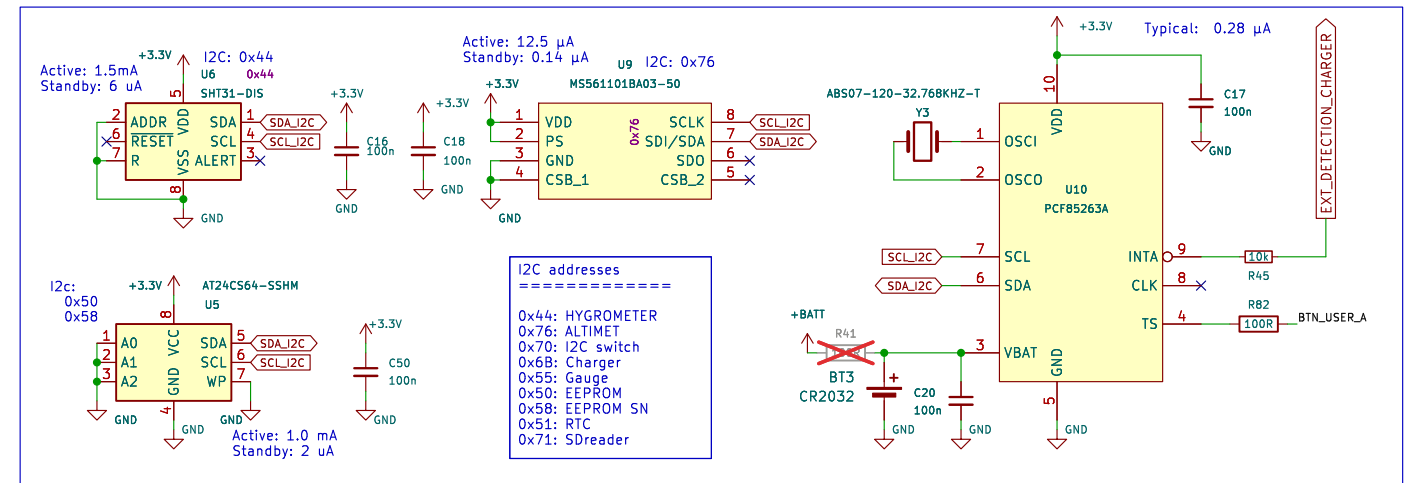


ATmega 1284p microcontroller

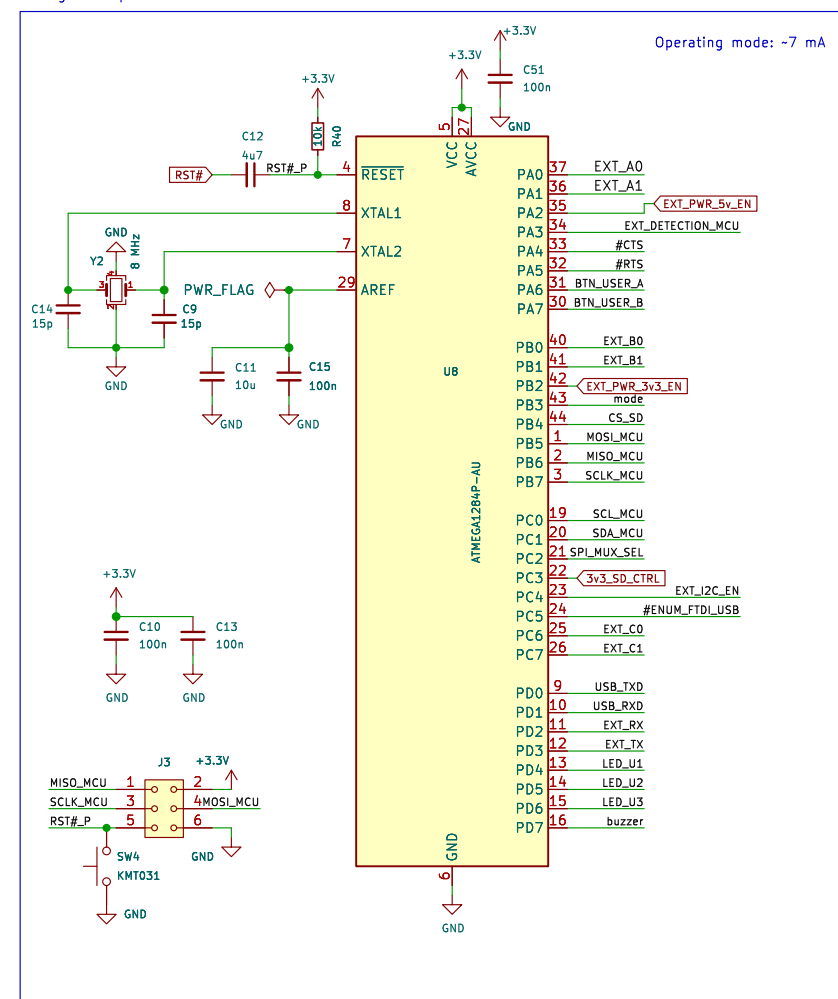


SPI-MUX (switching SPI from MCU to SDCard or to detector ext. connector)

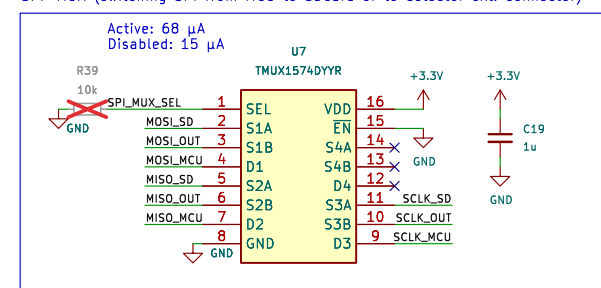


I2C buffer, allows to unconnect external I2C

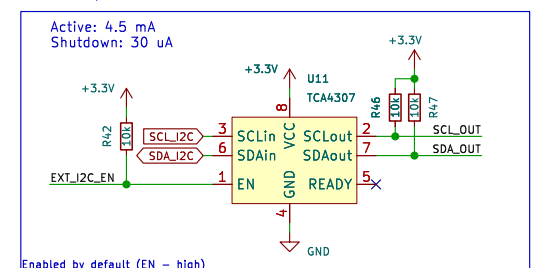

Connector to sensor board

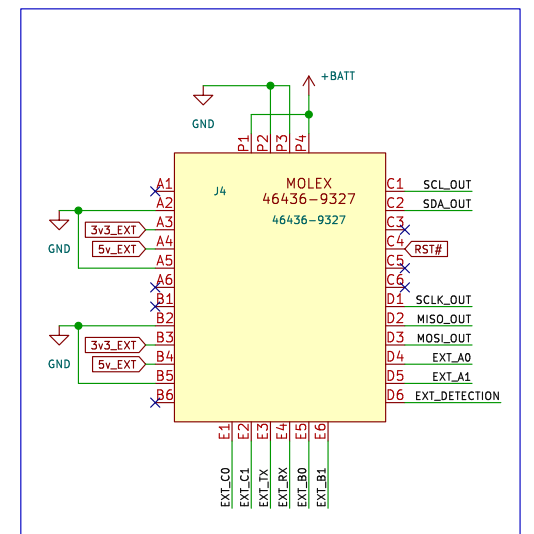

Auto-power up circuit

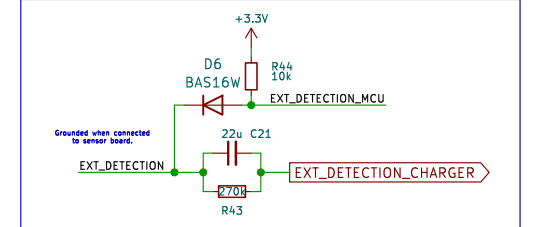

Title: BATDATUNIT01C



Universal power and data storage unit.

Author: MLAB.cz, roman-dvorak


Size: A3 Page: 1/3 Date: 2025-11-25




BATTERY CHARGER

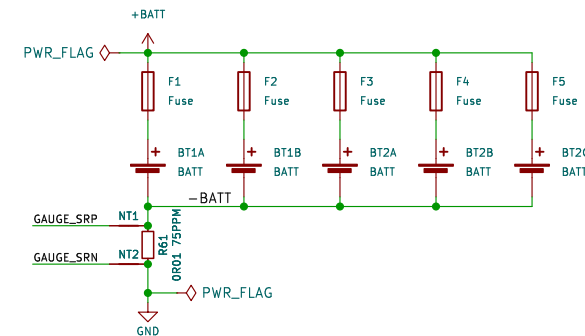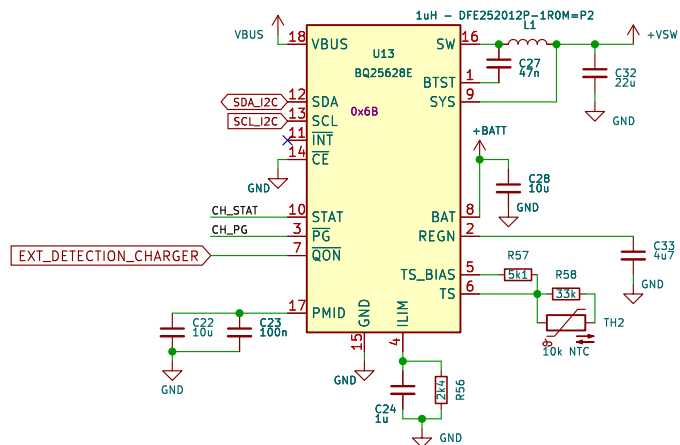

FUEL GAUGE

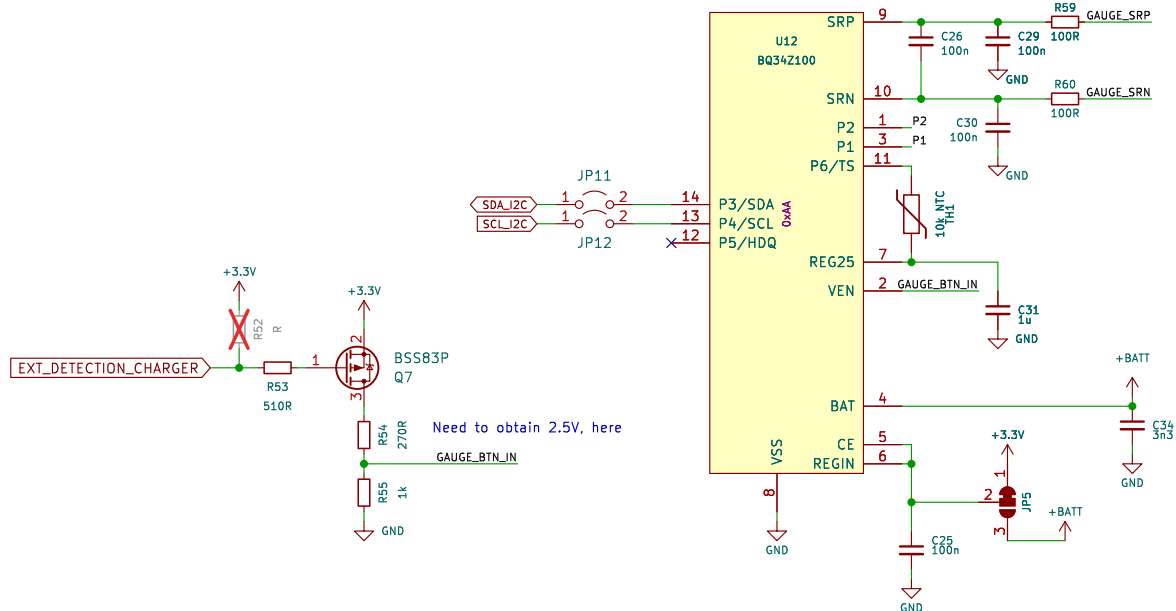

Battery Status Indicator

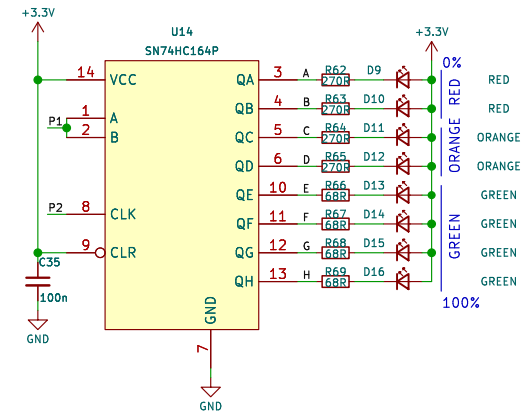

Title: BATDATUNTIO1

Universal battery and data storage unit.


Author: MLAB.cz, roman-dvorak

Size: A4

Page: 2/3

Date: 2025-11-25



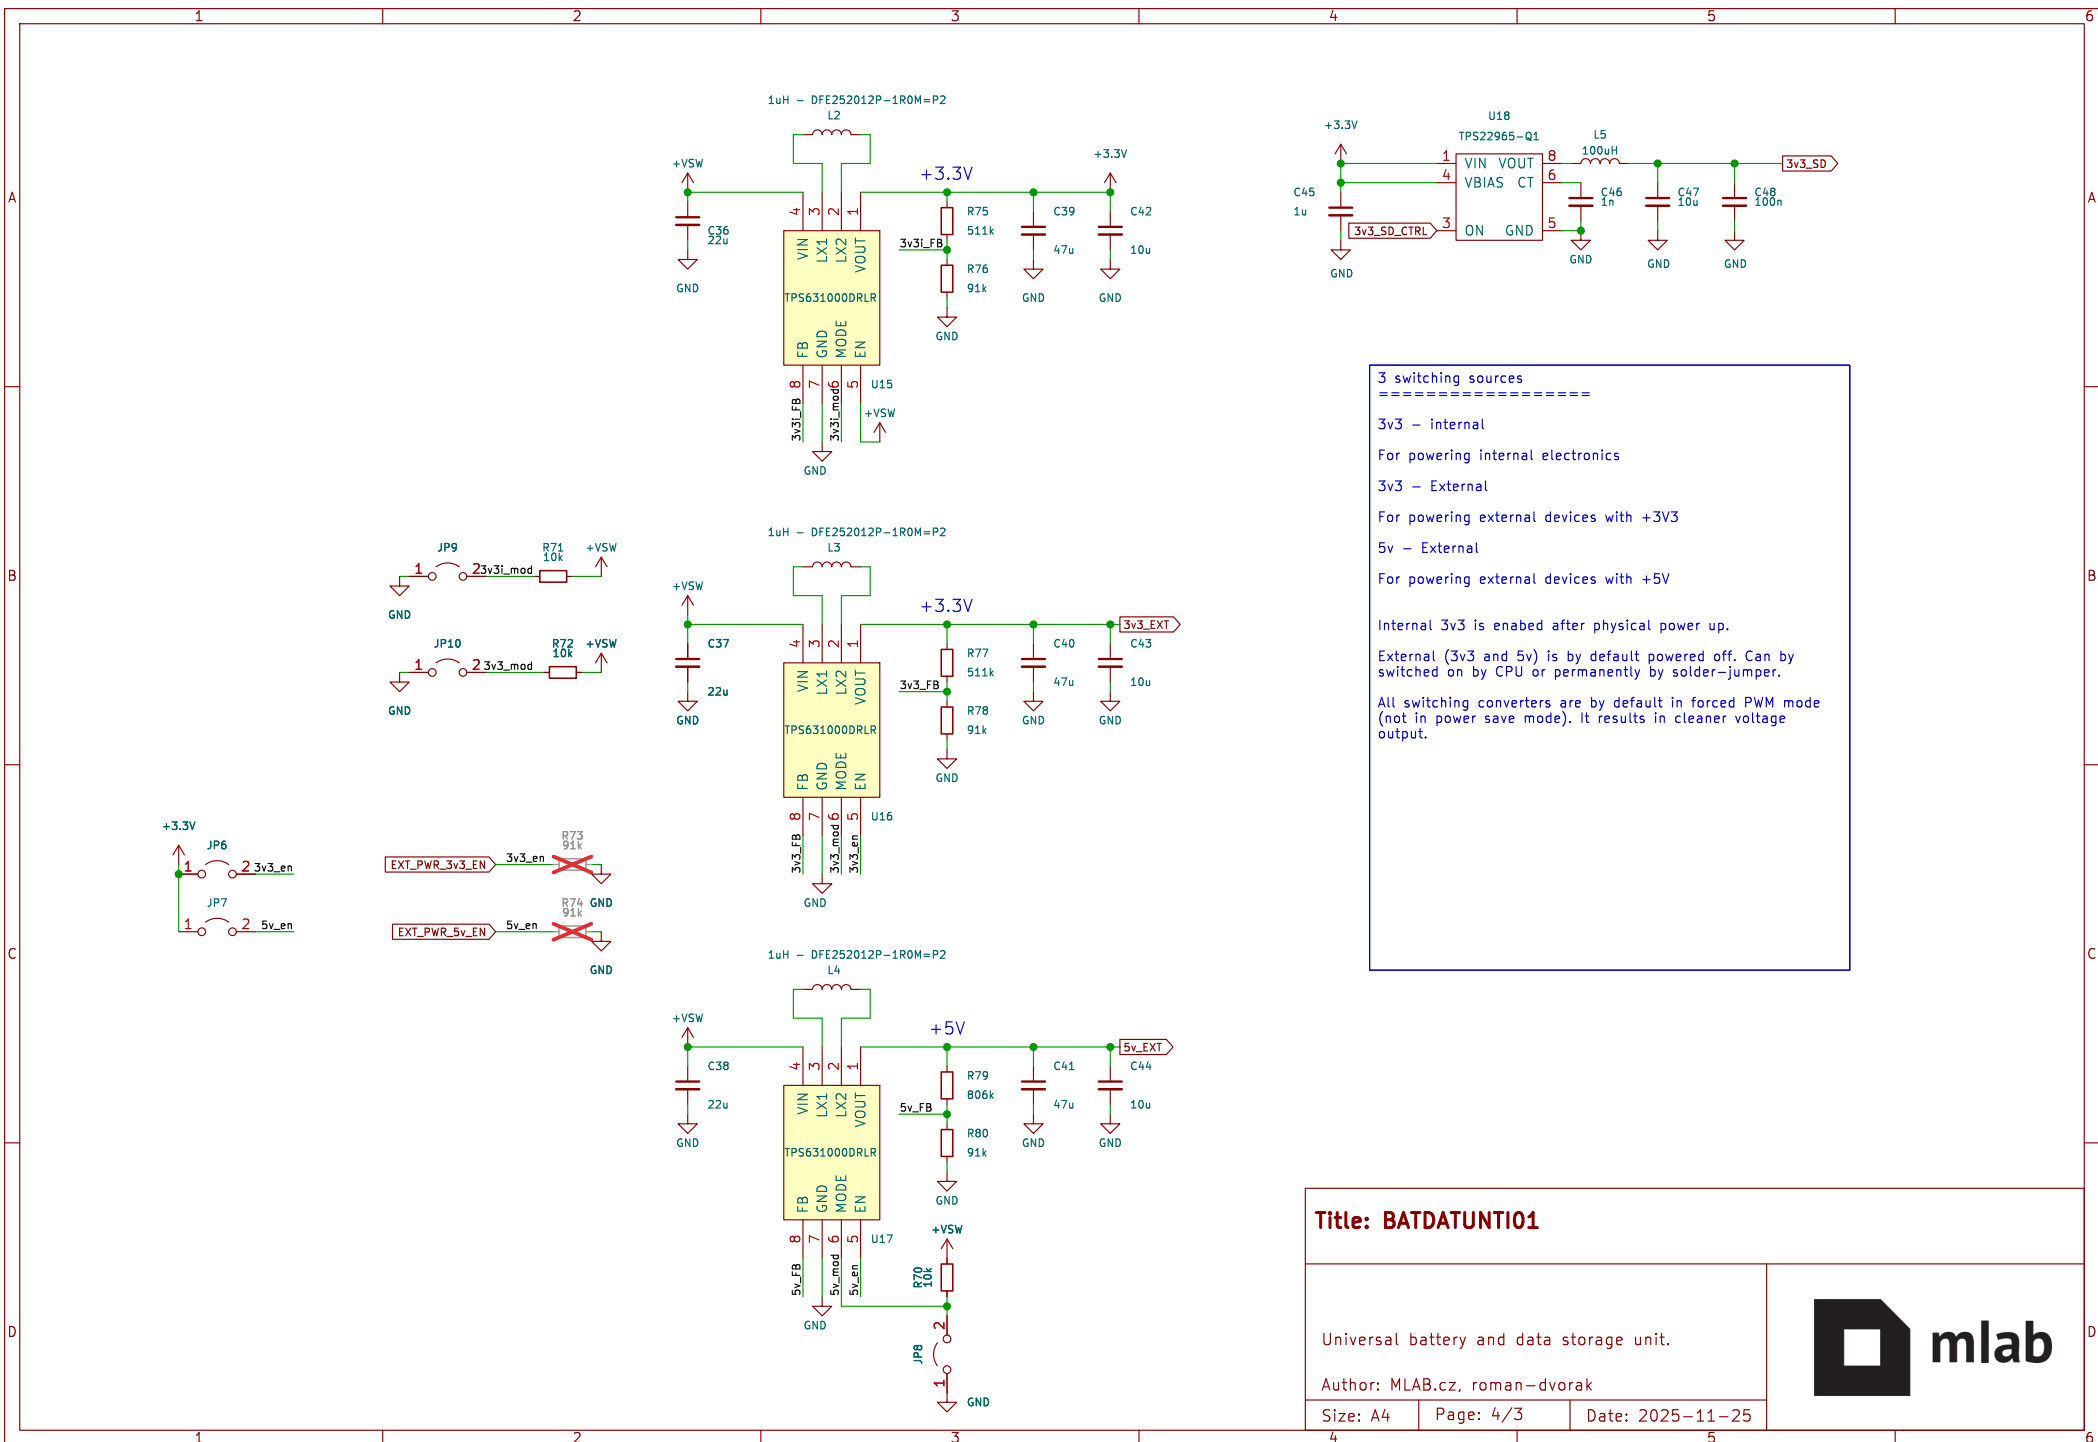

Title: BATDATUNTIO1

Universal battery and data storage unit.

Author: MLAB.cz, roman-dvorak

Size: A4

Page: 4/3

Date: 2025-11-25

