



POWER INPUT

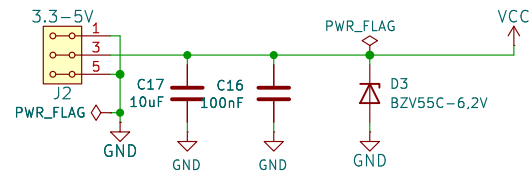

DC blocking
required for CC2564
high-Q, 25V
e.g. GRM0225C1E220JA02L

FL1
DEA202450BT-1213C1

PCB trace should have approximately 50 ohm impedance
pi network could later be used for impedance matching
BPF itself is 'impedance matched' to 50ohm

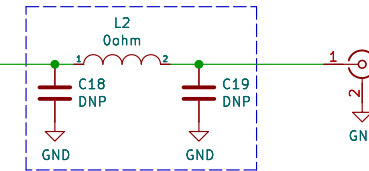


U5A
CC2564CRVMR

USART2_TX_1V8 A26 HCL_RX
USART2_RX_1V8 A33 HCL_TX
USART2_CTS_1V8 A32 HCL_RTS
USART2_RTS_1V8 A29 HCL_CTS

A35 AUD_FSYNC
B32 AUD_CLK
B34 AUD_IN
B33 AUD_OUT


R18 0
A25 SLOW_CLK
BT_SLOW_CLK

NSHUTDOWN_1V8 A6 SHUTD_N
BT_TX_DBG B24 TX_DBG
A14 NC

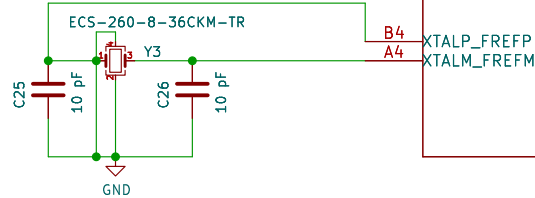

CL1-5_LDO_IN B6
MLDO_IN B5
MLDO_OUT B7
MLDO_OUT B2
MLDO_OUT A9
MLDO_OUT A5
SRAM_LDO_OUT B1
ADC_PPA_LDO_OUT A8
CL1-5_LDO_OUT A7
DCO_LDO_OUT A12
DIG_LDO_OUT A2
DIG_LDO_OUT A3
DIG_LDO_OUT B15
DIG_LDO_OUT B27
DIG_LDO_OUT B26
DIG_LDO_OUT B36
DIG_LDO_OUT B35

U5B
CC2564CRVMR

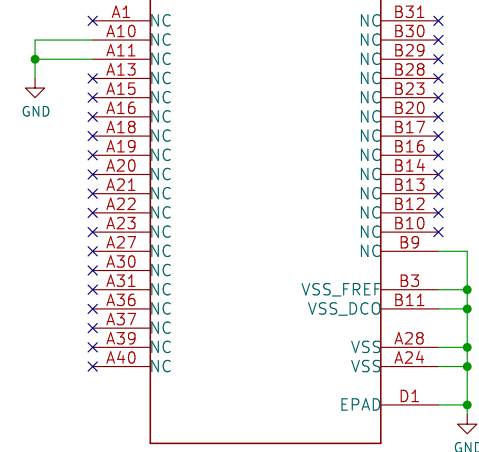

A10, A11, B9, and B10 are GND for improved RF performance

M1 M2 M3 M4 GND
MOUNTING HOLES

FID1 Fiducial
FID2 Fiducial
FID3 Fiducial

Title: BLE02A

Bluetooth IC with HCL

Author: MLAB.cz

Size: A4

Page: 1/1

Date: 2026-01-22

