

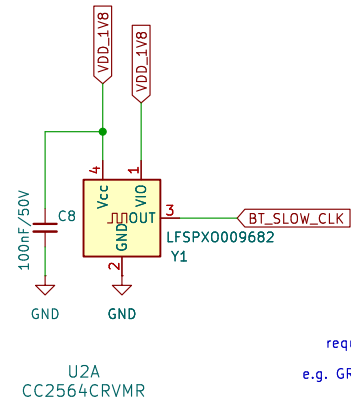
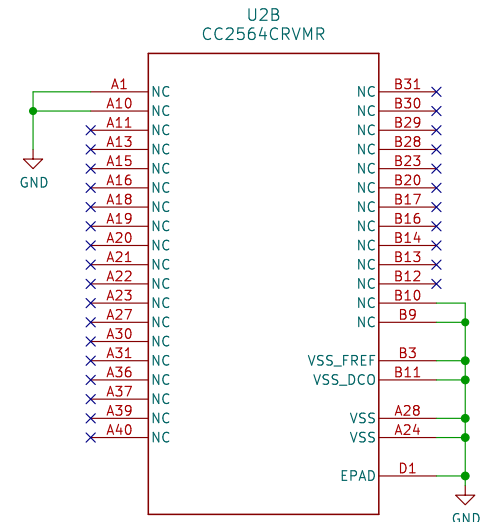
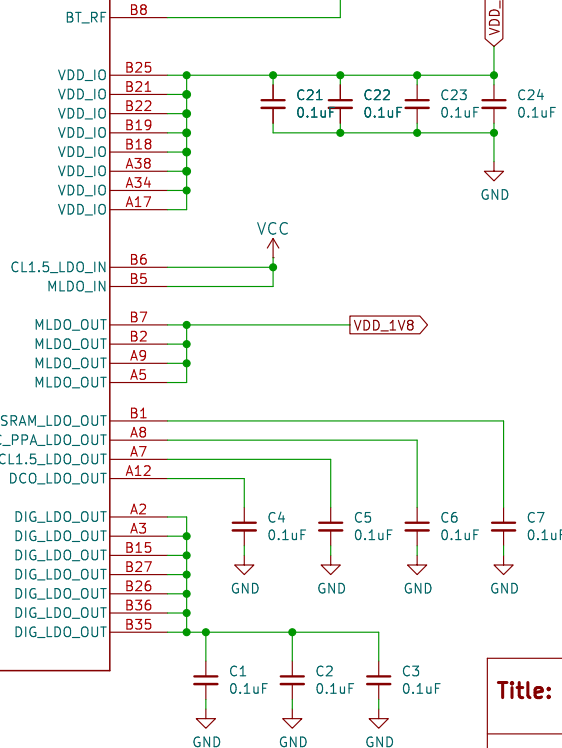
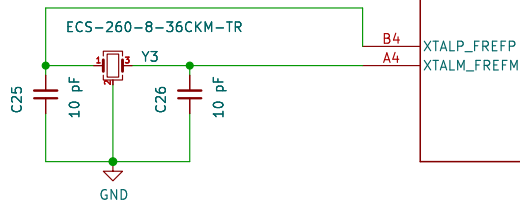



connectors



File: connectors.kicad_sch

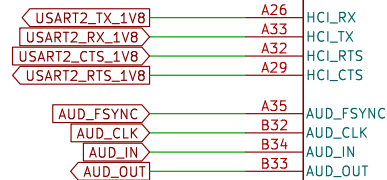

DC blocking
required for CC2564
high-Q, 25V
e.g. GRM0225C1E220JA02L

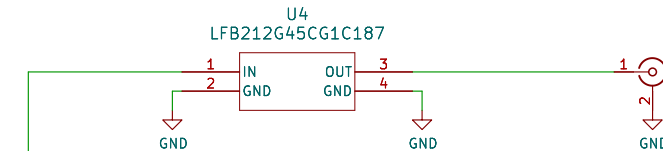

A10, A11, B9, and B10 are GND for improved RF performance



Title: BLE02A

Bluetooth controller IC with UART HCI
and I2S support


Author: MLAB.cz

Size: A4

Page: 1/2

Date: 2026-02-14



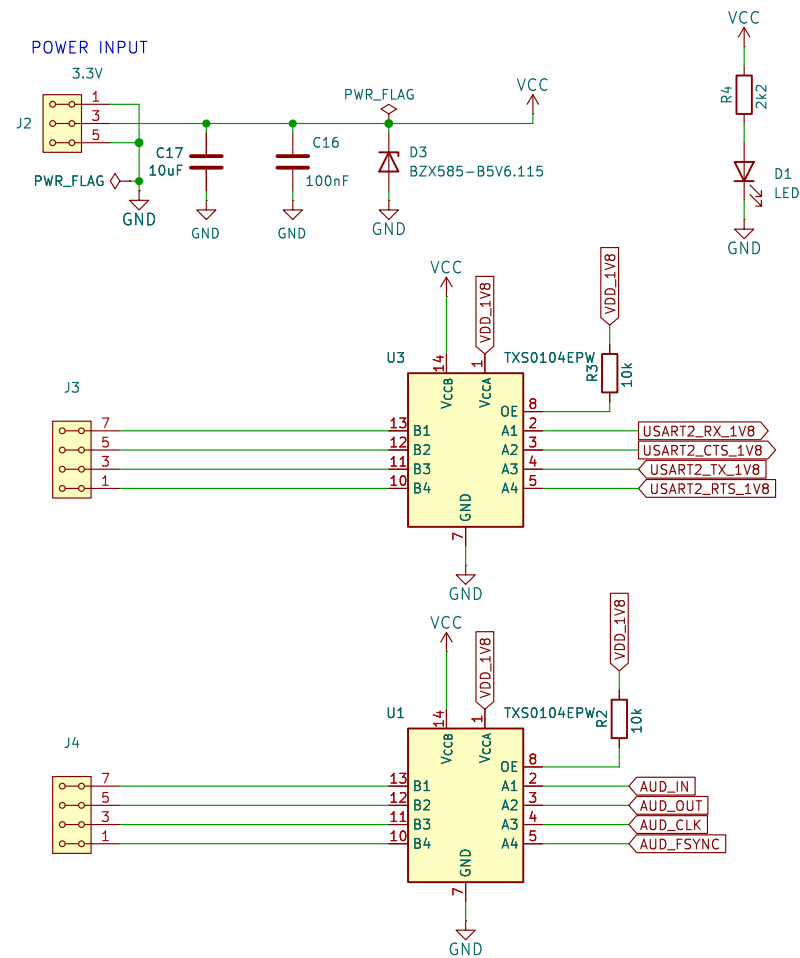

Title:

Author:

Size: A4

Page: 2/2

Date: 2026-02-14

