

connectors

File: connectors.kicad_sch

DC blocking
required for CC2564
high-Q, 25V
e.g. GRM0225C1E220JA02L

U2A
CC2564CRVMR

FL1
DEA202450BT-1213C1

U2B
CC2564CRVMR

A10, A11, B9, and B10 are GND for improved RF performance

M1 M2 M3 M4 GND
MOUNTING HOLES

FID1
Fiducial

FID2
Fiducial

FID3
Fiducial

Title: BLE02A

Bluetooth IC with HCI.

Author: MLAB.cz




Size: A4

Page: 1/2

Date: 2026-02-08



POWER INPUT

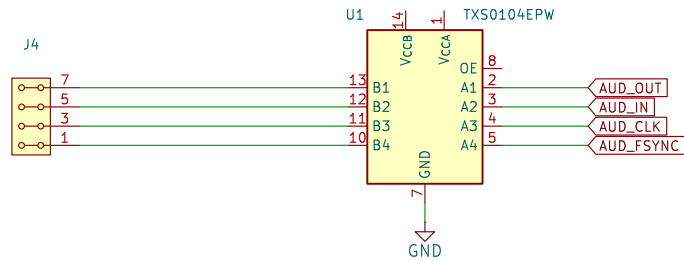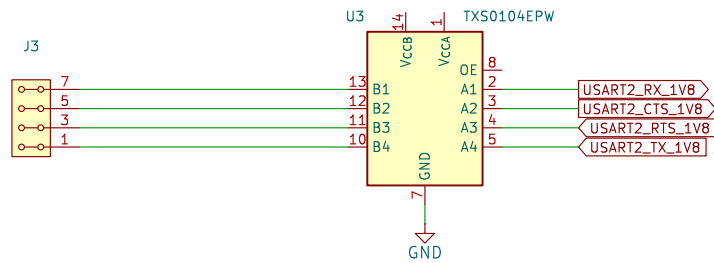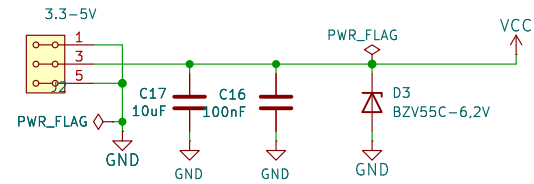

Title:

Author:

Size: A4

Page: 2/2

Date: 2026-02-08

