

connectors

File: connectors.kicad_sch

DC blocking
required for CC2564
high-Q, 25V
e.g. GRM0225C1E220JA02L

U2A
CC2564CRVMR

FL1
DEA202450BT-1213C1

PCB trace should have approximately 50 ohm impedance
pi network could later be used for impedance matching
BPF itself is 'impedance matched' to 50ohm

U2B
CC2564CRVMR

A10, A11, B9, and B10 are GND for improved RF performance

FID1
Fiducial

FID2
Fiducial

FID3
Fiducial

Title: BLE02A

Bluetooth IC with HCI.

Author: MLAB.cz




Size: A4

Page: 1/2

Date: 2026-02-08



POWER INPUT

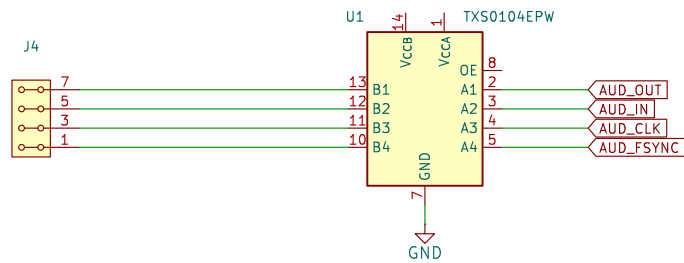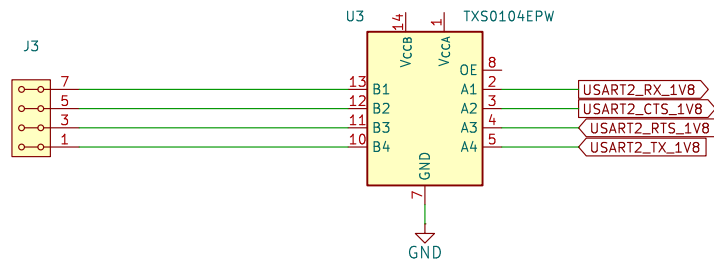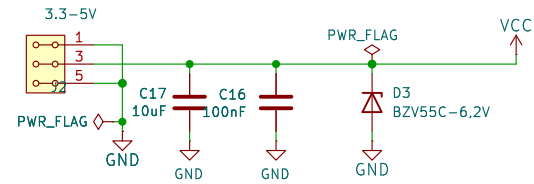

Title:

Author:

Size: A4

Page: 2/2

Date: 2026-02-08

