



connectors

File: connectors.kicad_sch



U2A
CC2564CRVMR

DC blocking
required for CC2564
high-Q, 25V
e.g. GRM0225C1E220JA02L

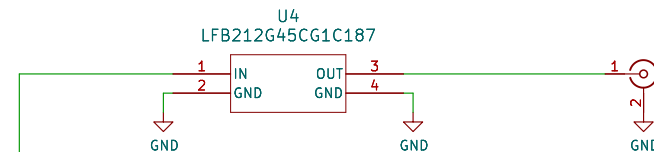



U4
LFB212G45CG1C187

USART2_TX_1V8 A26 HCL_RX
USART2_RX_1V8 A33 HCL_TX
USART2_CTS_1V8 A32 HCL_RTS
USART2_RTS_1V8 A29 HCL_CTS

AUD_FSYNC A35 AUD_FSYNC
AUD_CLK B32 AUD_CLK
AUD_IN B34 AUD_IN
AUD_OUT B33 AUD_OUT


BT_SLOW_CLK A25 SLOW_CLK

VDD_1V8 R1 A6 SHUTD_N
TP1 10k B24 TX_DBG
TestPoint A14 NC

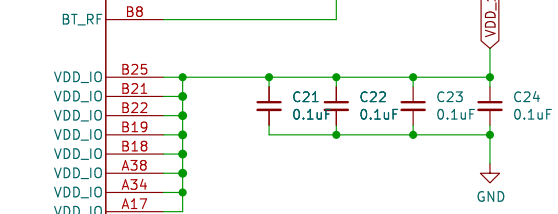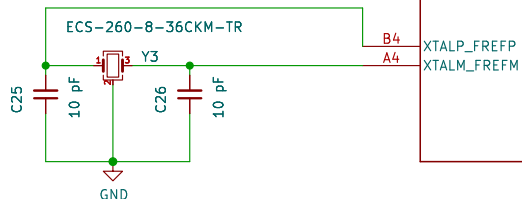


CL1.5_LDO_IN B6
MLDO_IN B5
MLDO_OUT B7
MLDO_OUT B2
MLDO_OUT A9
MLDO_OUT A5


SRAM_LDO_OUT B1
ADC_PPA_LDO_OUT A8
CL1.5_LDO_OUT A7
DCO_LDO_OUT A12
DIG_LDO_OUT A2
DIG_LDO_OUT A3
DIG_LDO_OUT B15
DIG_LDO_OUT B27
DIG_LDO_OUT B26
DIG_LDO_OUT B36
DIG_LDO_OUT B35



U2B
CC2564CRVMR

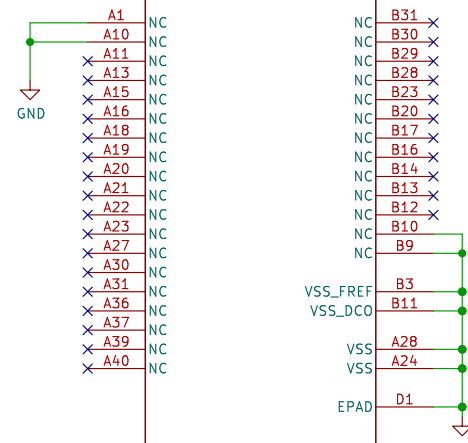

A10, A11, B9, and B10 are GND for improved RF performance



FID1 Fiducial
FID2 Fiducial
FID3 Fiducial

Title: BLE02A

Bluetooth controller IC with UART HCI
and I2S support

Author: MLAB.cz

Size: A4

Page: 1/2

Date: 2026-02-14



