

Title:

Author:


Size: A4

Page: 2/4


Date:



USB-C interface

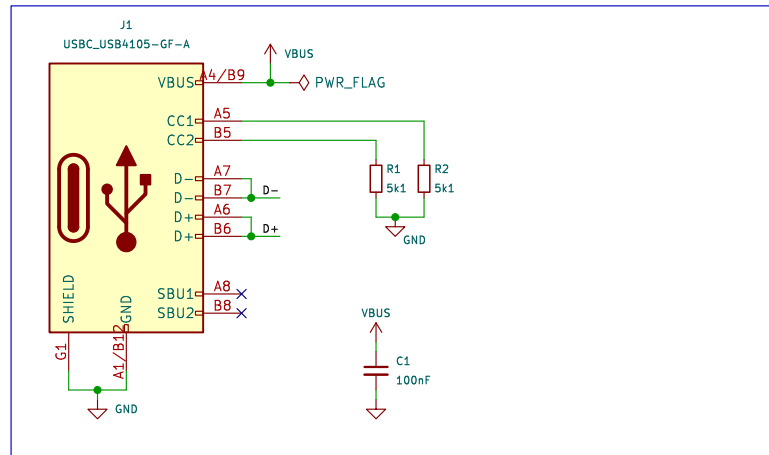


High-power DC input

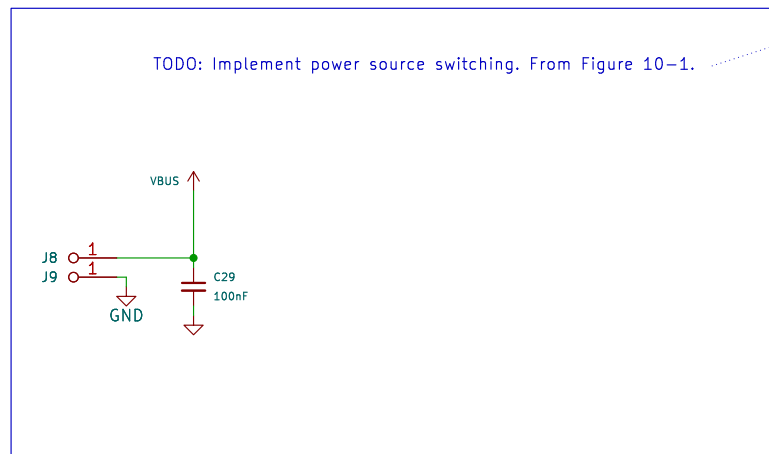

TODO: Implement power source switching. From Figure 10-1.

Battery Charger

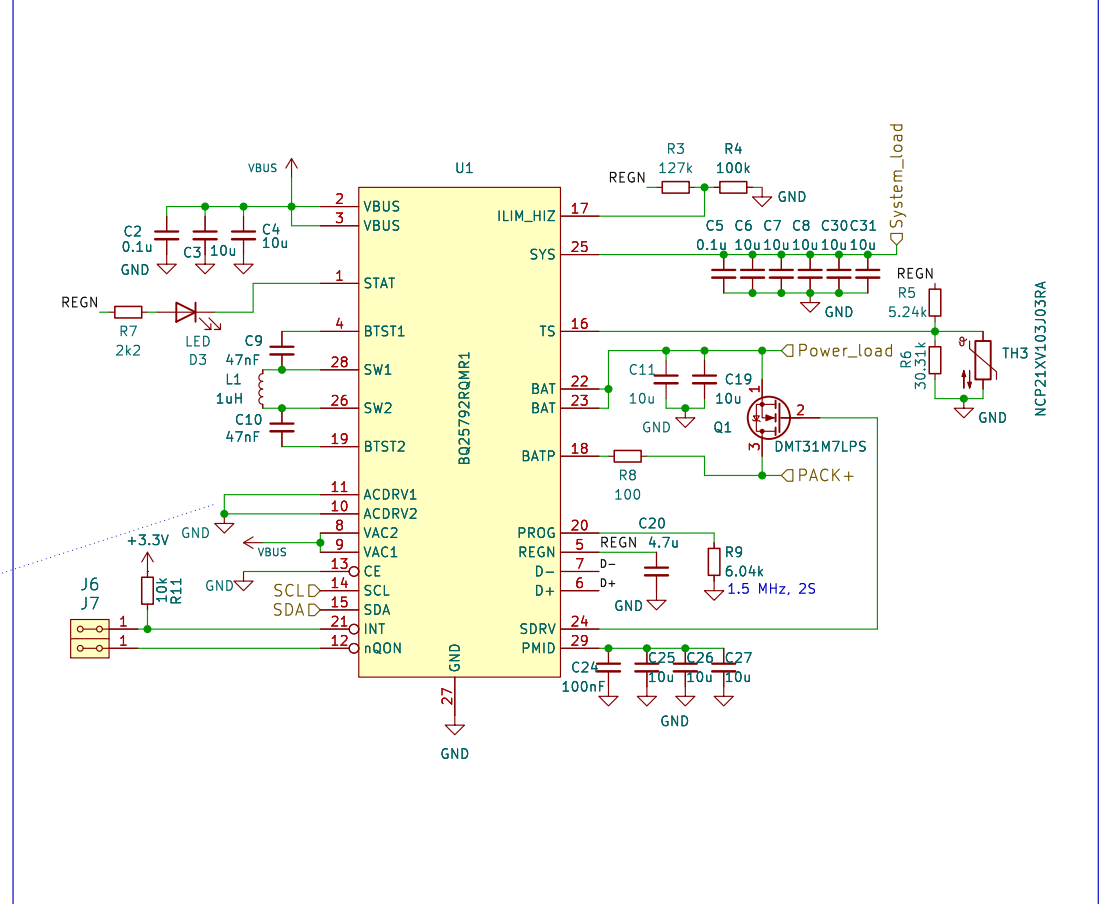

Title:

Author:

Size: A4


Page: 3/4

Date:




Switch buck regulator

TODO: Implement +5V/3.3V regulated output.

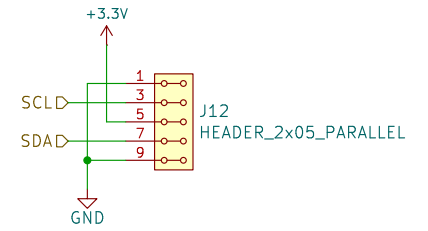

POWER OUTPUT

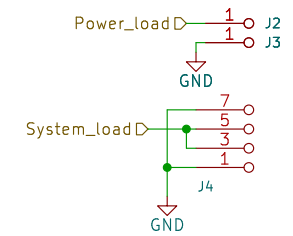

Title:

Author:

Size: A4

Page: 4/4

Date:

