





USB-C interface

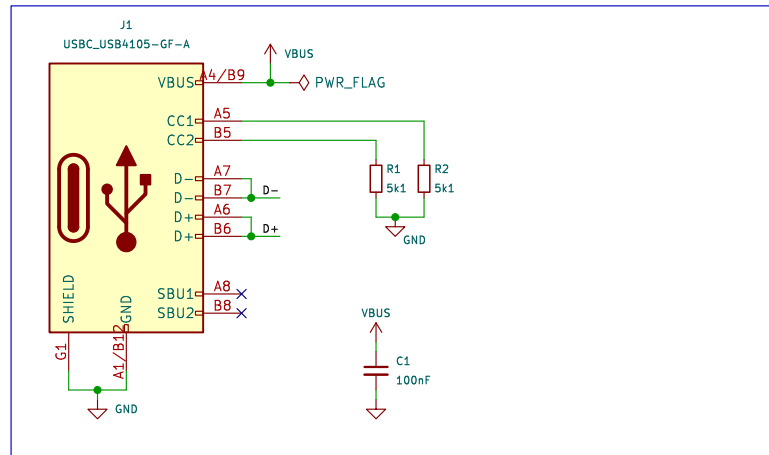


High-power DC input

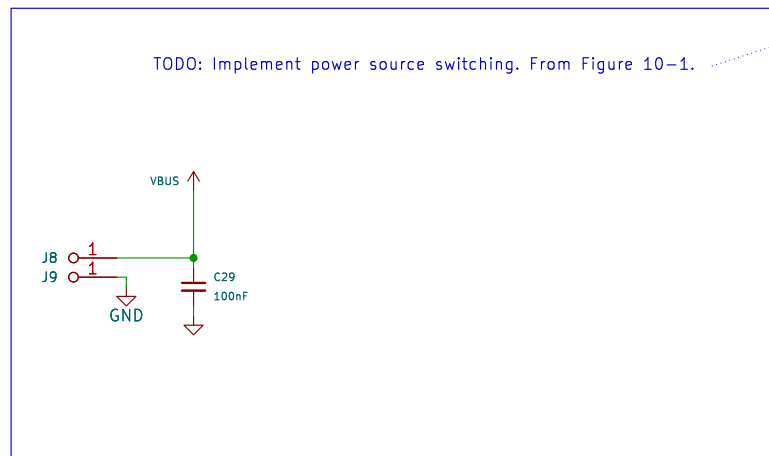

TODO: Implement power source switching. From Figure 10-1.

Battery Charger

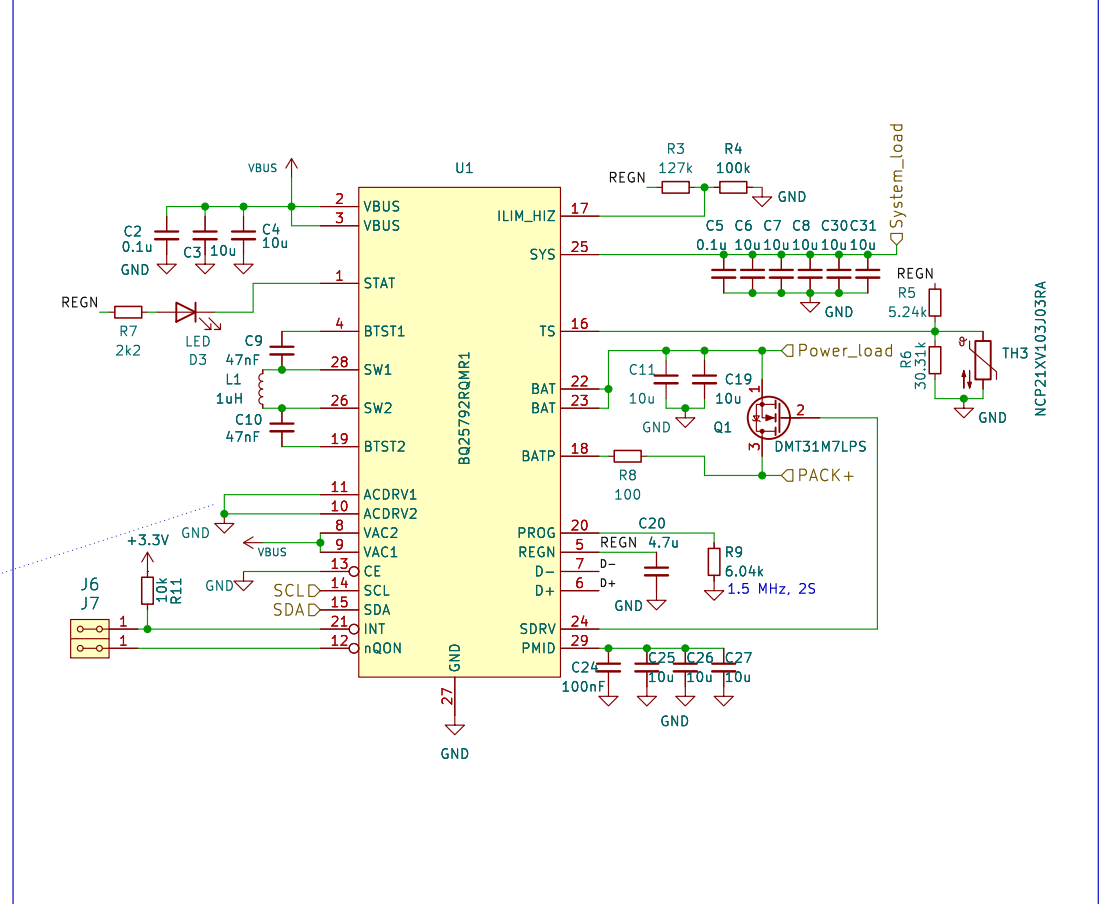

Title:



Author:

Size: A4


Page: 3/4

Date:



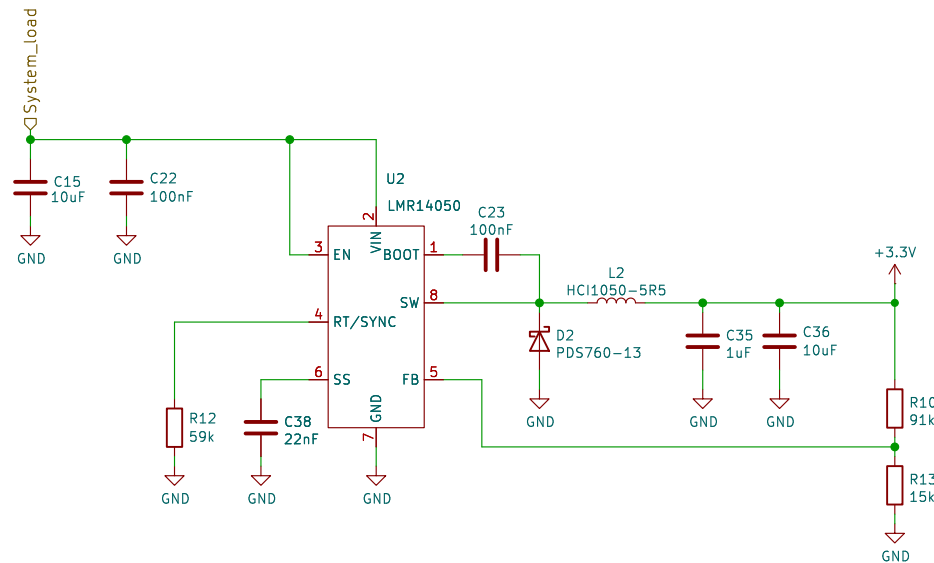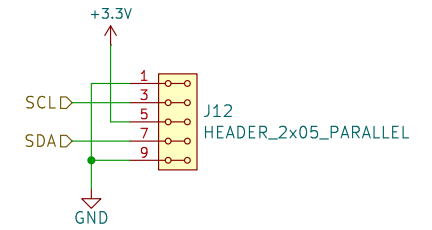

POWER OUTPUT



TODO: Recalculate the divider to 3.3V output.

Title:

Author:

Size: A4

Page: 4/4

Date:

