




Bus select.




POWER INPUT

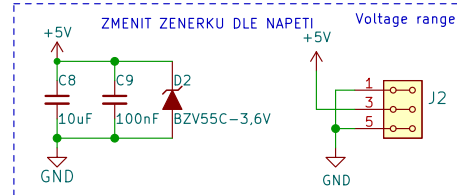


the display is supposed to be installed in a precision socket.

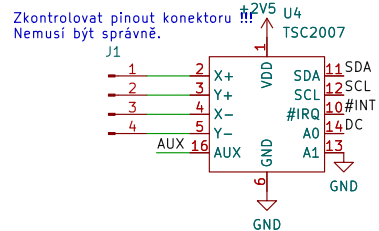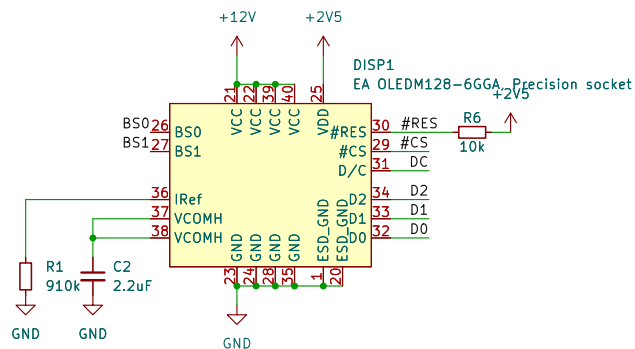

I2C

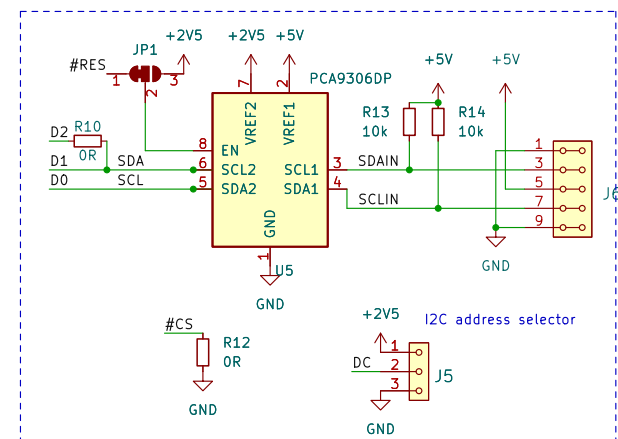


SPI

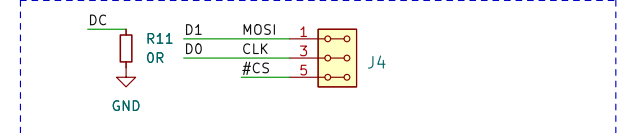

Mlab Headers: Straight_2x03
#RES 1
#INT 3
AUX 5

12V power source

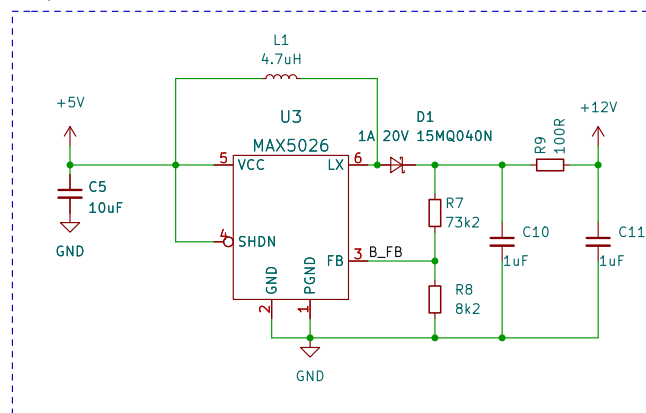

Title: OLED01A

roman-dvorak

Author: MLAB

Size: A4

Page: 1/1

Date: 2022-05-11

