FarmGPU MLPerf Storage v2.0 IntelGNR Single-Host System Description

---

Cover Page

System Name: FarmGPU-IntelGNR-Storage01

Submitter Name: FarmGPU

Submission Date: July 11, 2025

Version of the Benchmark: MLPerf Storage v2.0

Solution Type of the Submission: Local Storage

Submission Division: CLOSED

---


1. System Topology

The system under test consists of a single host acting as both the DLIO client and the storage data node, connected to a backend switch. This integrated setup simplifies the network architecture for single-host performance testing.

2. Power Requirements

- **DLIO Client & Storage Data Node (Single-Host Node):**
  - Quantity: 1
  - Design Power: 1200W
  - Number of Active PSUs: 2
  - Number of Passive PSUs: 0

Component	Power Supply Unit	Nameplate Power	Design Power
DLIO Client & Storage Data Node	PSU 1	1600 W	1200 W
	PSU 2 (Back-up)	1600 W	

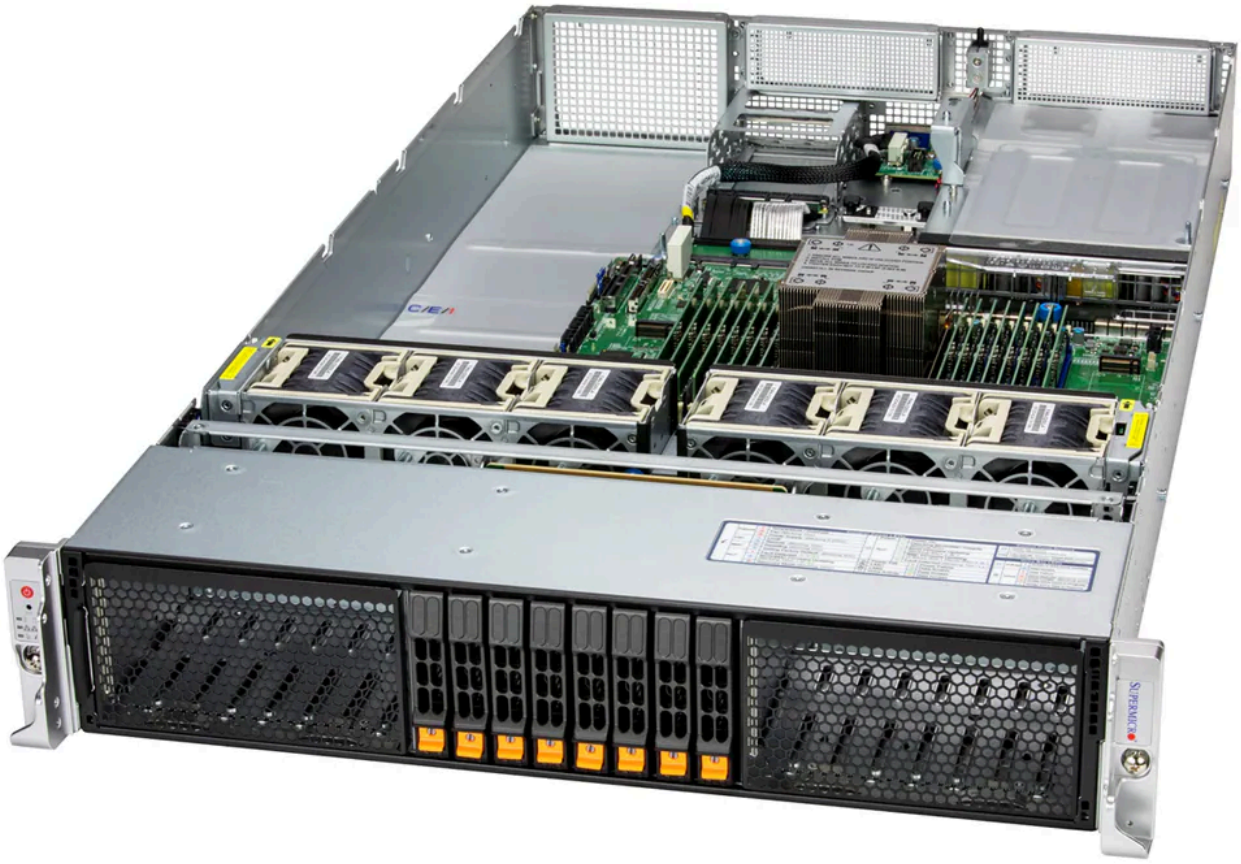

3. Hardware

- **3.1 Single-Host Node**
  - **Server Model:** Supermicro SYS-212H-TN Product Page
  - **Form Factor:** 2U Rack Mount
  - **Motherboard:** X14SBH
  - **CPU:** 1 x Intel® Xeon® 6781P, 80 cores, 160 threads (enabled by Hyper-Threading), 2.0 GHz base frequency, 3.8 GHz max turbo frequency, 3.2 GHz all-core turbo frequency, 336 MB L3 Cache, 350 W TDP, FCLGA4710 Socket.
  - **Memory:** 256GB (8x32GB) Micron Technology MTC20F2085S1RC64BD2 UXCC 6400 MT/s ECC DDR5 RDIMM.
  - **Storage:** 24 x Solidigm D7-PS1010 (SB5PH27X076T) 7.68TB PCIe 5.0 NVMe SSDs in a RAID-0 configuration
  - **Networking:** 1 x NVIDIA ConnectX-7 MCX75310AAS-NEA_Ax 400GbE / NDR IB (default mode) Single-port OSFP PCIe 5.0 x16 NIC

4. Software

- **4.1 Single-Host Node**
  - **Operating System:** Ubuntu 24.04.2 LTS (Noble Numbat), Kernel Linux 6.15.4 (x86_64)
  - **MPI:** Open MPI 4.1.4

5. Settings

- 5.1 XFS Configuration
  The XFS filesystem was configured with the following parameters:
  - meta-data=/dev/md127 isize=512 agcount=168, agsize=268434944 blks
  - sectsz=4096 attr=2, projid32bit=1
  - crc=1 finobt=1, sparse=1, rmapbt=1
  - reflink=1 bigtime=1 inobtcount=1 nrext64=0
  - data = bsize=4096 blocks=45007994880, imaxpct=1
  - sunit=512 swidth=12288 blks
  - naming =version 2 bsize=4096 ascii-ci=0, ftype=1
  - log =internal log bsize=4096 blocks=521728, version=2
  - sectsz=4096 sunit=1 blks, lazy-count=1
  - realtime =none extsz=4096 blocks=0, rtextents=0
- 5.2 RAID Configuration
  A RAID-0 array was created using 24 NVMe devices (/dev/nvme[1-24]n1).
  - md127 : active raid0 nvme25n1[23] nvme24n1[22] nvme23n1[21] nvme22n1[20] nvme21n1[19] nvme20n1[18] nvme19n1[17] nvme18n1[16] nvme17n1[15] nvme16n1[14] nvme15n1[13] nvme14n1[12] nvme13n1[11] nvme12n1[10] nvme11n1[9] nvme10n1[8] nvme9n1[7] nvme8n1[6] nvme7n1[5] nvme6n1[4] nvme5n1[3] nvme4n1[2] nvme3n1[1] nvme1n1[0]
  - 180031979520 blocks super 1.2 2048k chunks
- 5.3 Mount Override
  The RAID array was mounted with specific XFS options for performance:
  - /dev/md127 on /mnt/ssd type xfs (rw,noatime,nodiratime,attr2,inode64,logbufs=8,logbsize=32k,sunit=4096,swidth=98304,noquota)
- 5.4 Memory Allocation Tweaks Performed
- 5.5 VM Tweaks
  Virtual machine settings were optimized:
  - SMT (Simultaneous Multi-threading) was disabled: `echo off | sudo tee /sys/devices/system/cpu/smt/control`
  - `vm.page-cluster` was set to 0: `sudo sysctl -w vm.page-cluster=0`
  - `vm.min_free_kbytes` was set to 262144: `sudo sysctl -w vm.min_free_kbytes=262144`

- 5.6 CPU Governor
  The CPU governor was set to performance mode for all CPUs:
  - `for cpu in /sys/devices/system/cpu/cpu[0-9]*; do echo performance | sudo tee "$cpu/cpufreq/scaling_governor"; done`
- 5.7 GRUB Configuration[1]
  The GRUB command line was modified to disable memory initialization for improved performance. The GRUB_CMDLINE_LINUX_DEFAULT line was changed from:
  - GRUB_CMDLINE_LINUX_DEFAULT=""
    to:
  - `GRUB_CMDLINE_LINUX_DEFAULT="init_on_alloc=0 init_on_free=0"`
    After modification, GRUB was updated and the system rebooted:
  - `sudo update-grub`
  - `sudo reboot`

---

1. `init_on_alloc=0` is a setting recommended by NVIDIA to improve performance in these workloads [cite: https://docs.nvidia.com/grace-perf-tuning-guide/os-settings.html#init-on-alloc]