
H3C UniStor Polaris X20000 with 16 hosts System Description

System Name: UniStor Polaris X20000 with 16 hosts
Submitter Name:fei xu/ H3C
Submission Date: July 9,2025
Benchmark Version:v2.0-rc0
Solution Type:proprietary-UniStor Polaris X20000
Submission Division:CLOSED

1. System Topology

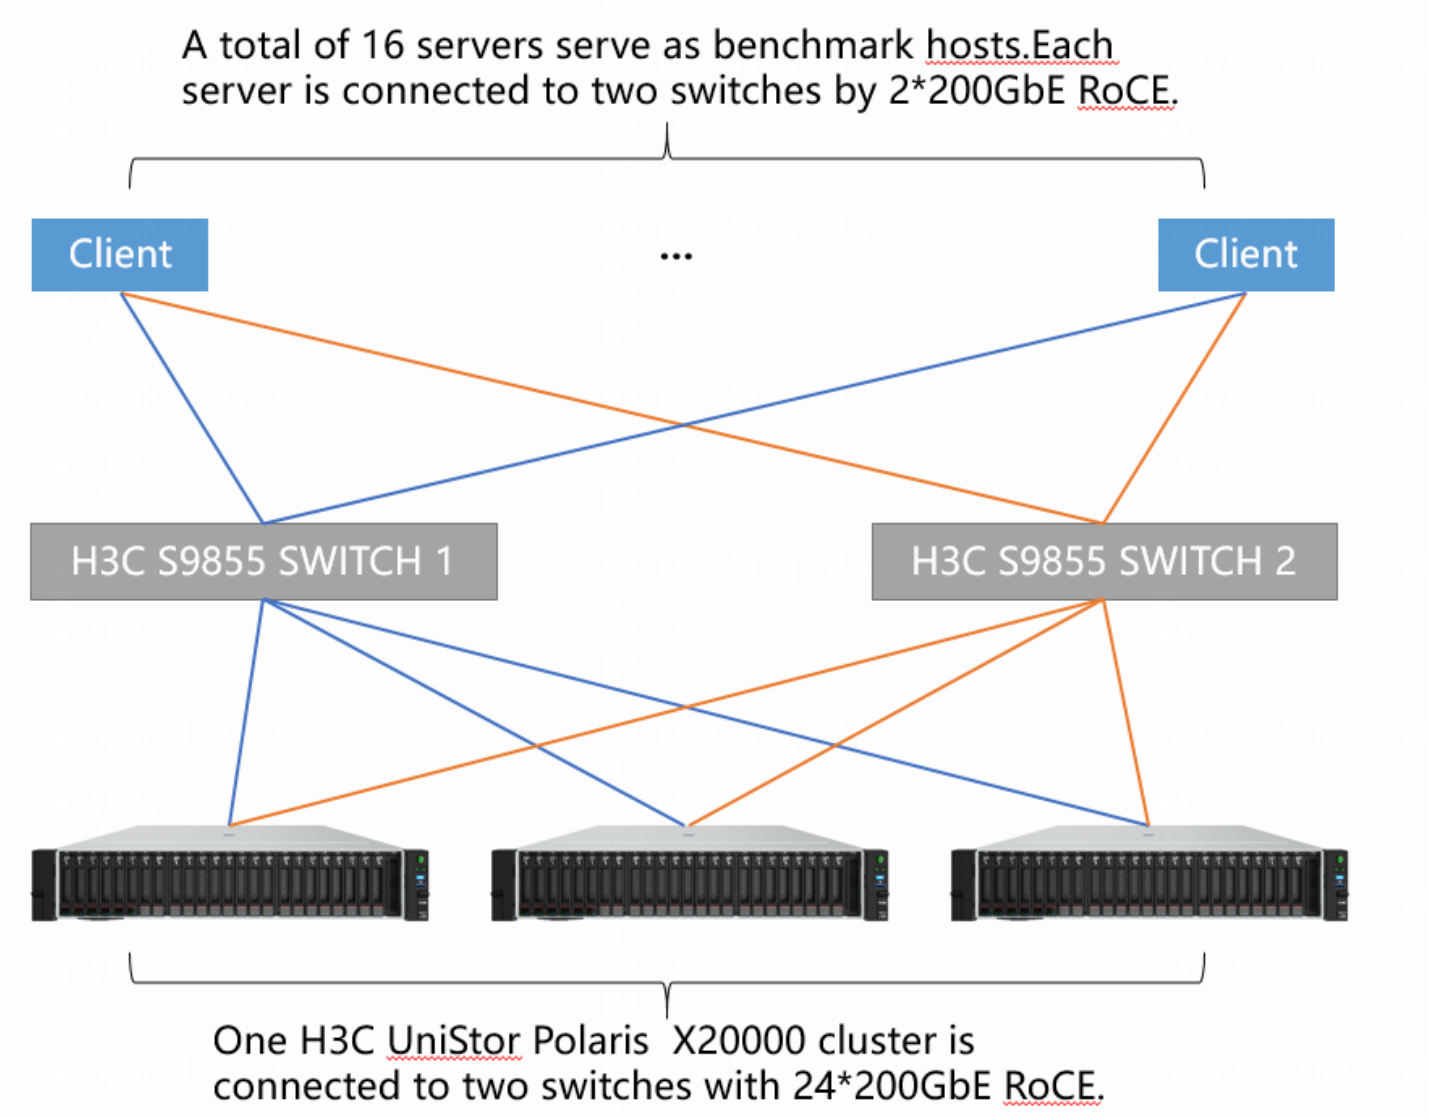


2. Benchmark Host Server

- There are a total of 16 clients, each equipped with 2 x 200GE NIC cards, connected to two switches

3. Hardware

3.1 Storage Cluster

- The storage service is provided by a distributed cluster consisting of three H3C UniStor Polaris X20000 devices.

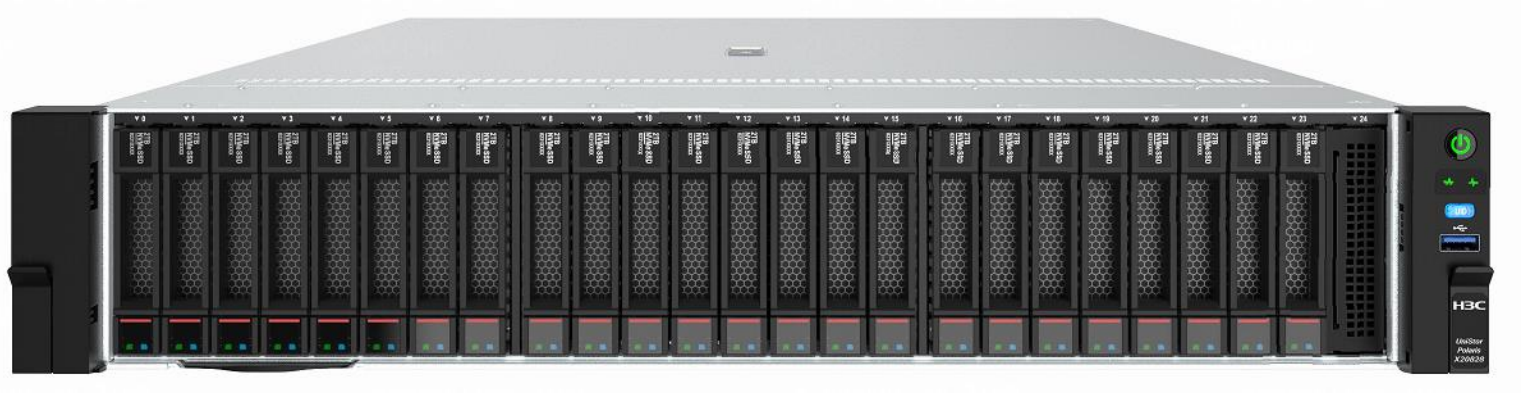

3.2 Switch

- The H3C S9855 series switch is a new generation high-performance, high-density 400GE/200GE/100GE Ethernet switch launched by H3C for data centers and high-end campuses. Provide high-density 400GE/200GE/100GE/25GE/10GE ports



3.3 Power Requirements

System component	Power supply unit	Nameplate rated power	Design Power
X20000 Appliance 1	Power supply 1	1600W	1600W
	Power supply 2	1600W	
X20000 Appliance 2	Power supply 1	1600W	1600W
	Power supply 2	1600W	
X20000 Appliance 3	Power supply 1	1600W	1600W
	Power supply 2	1600W	
Totals		9600W	

3.4 Rack Units Requirements

The Storage system consumes 6U(3X2U) space.

4. Software

4.1 Client

Software	version
OS	Ubuntu 24.04.2 LTS
kernel	Linux 6.8.0-53-generic
Mellanox OFED version	MLNX_OFED_LINUX-24.10-2.1.8.0

4.2 Server

Software	version
OS	NingOS v3 (1.0.2306)
kernel	Linux 5.10.0-136.12.0.86.4.nos1.x86_64
Mellanox OFED version	OFED-internal-23.04-1.1.3