Hewlett Packard
Enterprise

# HPE Cray Supercomputing Storage Systems E2000

System Name: HPE Cray Supercomputing Storage Systems E2000
Submission Date: July 11, 2025
Benchmark version: v2.0
Solution Type: Proprietary, parallel filesystem
Submission Division: Closed

# System Description - Hardware

## Client

The clients were the HPE DL325 system, single CPU socket and 187 GB of total memory. The client communicates with the server over InfiniBand.

## Server

The server being used was the HPE Cray Supercomputing Storage Systems E2000. It is a parallel storage system that communicates with the over InfiniBand.




# System Description - Hardware

## Power requirements

The HPE Cray Supercomputing Storage Systems (CSSS) E2000 is designed with active/active power supply units. There were four storage node used, each having a 2x2000 watts power supply units and design power of 2000 watts. The sum of the design power for all the nodes would be 8000 watts.

| Quantity | System Components | Power Supply Unit (PSU) | Nameplate rated power | Design Power |
|---|---|---|---|---|
| 4 | HPE CSSS E2000 | PSU 1<br>PSU 2 | 2000 watts<br>2000 watts | 2000 |
| **Total** | | **4000 watts** | | |

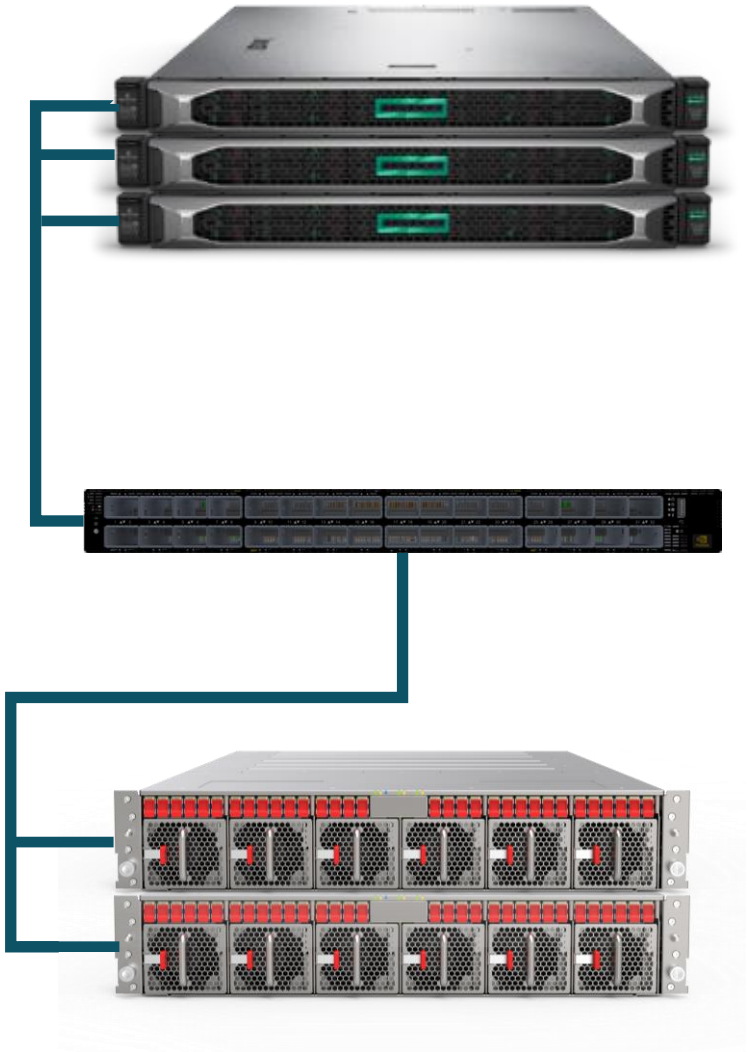

**Client nodes:**

15x DL325 Gen 11

- 1x AMD Genoa 48c
- 16x 32GB RAM
- 1x 400Gb 1-port IB HCA

**400 Gbps InfiniBand switch**

**Storage Nodes (2x Nodes per Physical enclosure)**

4x HPE Cray E2000 nodes

- 1x AMD Genoa 32c, 3.25 GHz CPUs
- 16x 32GB RAM
- 16x 3.84 TB NVMe SSDs
- 2x 400Gb 1-port IB HCA

# System Description - Software

## Client

The client distribution is Rocky Linux 9.4 (Blue Onyx), the Lustre build installed is the Cray Lustre 2.15.

## Server

The system distribution is 9.6 (Blue Onyx), and is running the ClusterStor standard version 7.2-010.

