

HPE Cray Supercomputing Storage Systems E2000

System Name:	HPE Cray Supercomputing Storage Systems E2000
Submission Date:	July 24, 2026
Benchmark version:	v3.0
Solution Type:	Proprietary, parallel filesystem
Submission Division:	Closed

System Description - Hardware

Client

The clients were the HPE DL325 system, single CPU socket and 187 GB of total memory. The client communicates with the server over InfiniBand.

Server

The server being used was the HPE Cray Supercomputing Storage Systems E2000. It is a parallel storage system that communicates with the over InfiniBand.


System Description - Hardware

Power requirements

The HPE Cray Supercomputing Storage Systems (CSSS) E2000 is designed with active/active power supply units. There were four storage node used, each having a 2x2000 watts power supply units and design power of 2000 watts. The sum of the design power for all the nodes would be 8000 watts.

Quantity	System Components	Power Supply Unit (PSU)	Nameplate rated power	Design Power
4	HPE CSSS E2000	PSU 1 / PSU 2	2000 watts / 2000 watts	2000
Total	4000 watts			

System Description - Hardware

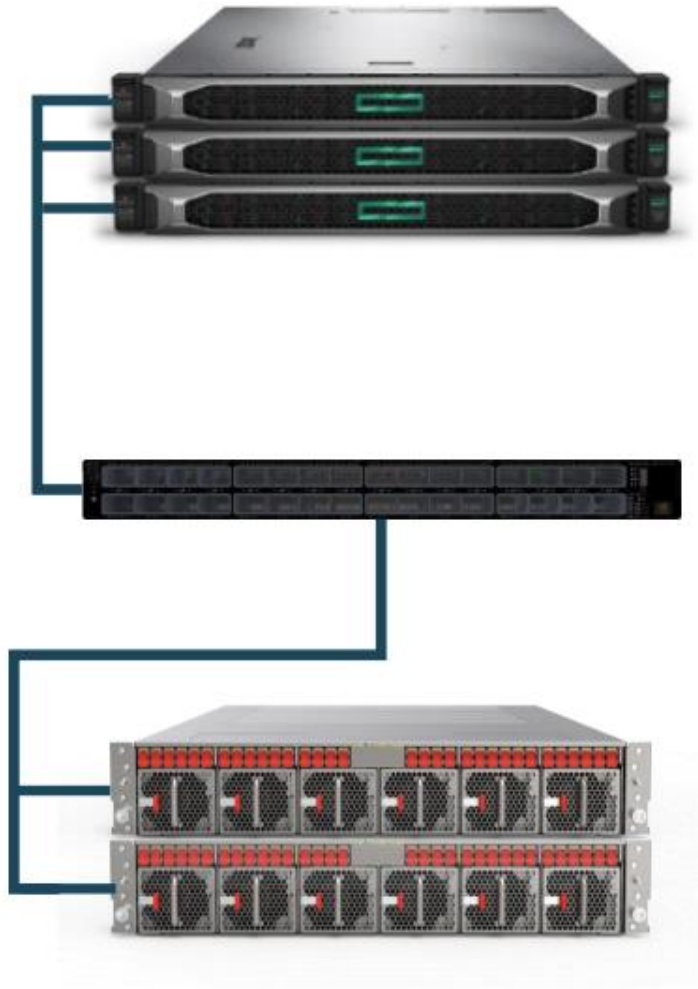

Client nodes:

- 16x DL325 Gen 11
- 1x AMD Genoa 48c
- 16x 32GB RAM
- 1x 400Gb 1-port IB HCA

400 Gbps InfiniBand switch

Storage Nodes (2x Nodes per Physical enclosure)

- 4x HPE Cray E2000 nodes
- 1x AMD Genoa 32c, 3.25 GHz CPUs
- 16x 32GB RAM
- 16x 3.84 TB NVMe SSDs
- 2x 400Gb 1-port IB HCA

System Description - Software

Client

The client distribution is Rocky Linux 9.4 (Blue Onyx), the Lustre build installed is the Cray Lustre 2.15.

Server

The system distribution is 9.6 (Blue Onyx), and is running the ClusterStor standard version 7.2-010.