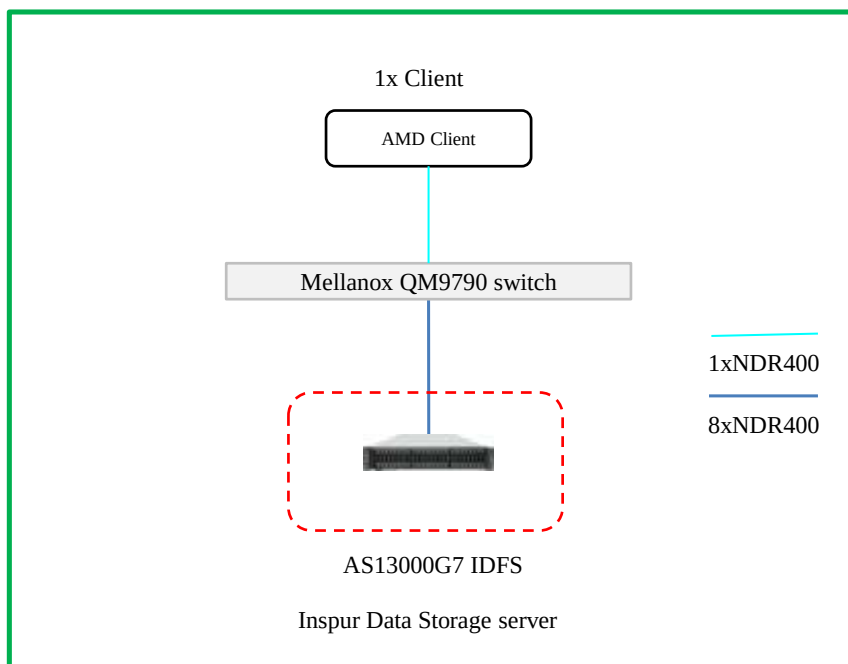

1. Overview

This benchmark test uses single chassis four-node system storage server, deploy the AS13000G7 IDFS distributed storage software.

2. Hardware Diagram



2.1 Client

This test use one client node equipped with one AMD 9554 CPU, 384 GB memory, one 400 Gb IB network adapter, and one 1600 W power supply module.

2.2 Server

The storage is one AS13000G7 device, with a height of 2U and four Nodes. It can be configured with 24×7.68TiB NVMe SSDs and 8×400Gb IB network cards, providing a unified distributed file system called IDFS.



2.3 Server Power Requirements

System component	Power supply unit	Nameplate rated power	Design Power
AS13000G7 Appliance 1	Power supply 1	2000W	8000W
	Power supply 2	2000W	
	Power supply 3	2000W	
	Power supply 4	2000W	
Totals		8000W	8000W

2.4 Switch

Mellanox QM9790 switch.

3. Software

3.1 Client

Client OS – Ubuntu 22.04

Mellanox OFED version – 5.8-4.1.5.0

3.2 Server

Storage Servers OS – kos release 5.8

Storage Servers Kernel – 4.19.91-26.6.25.kos5.x86_64

Mellanox OFED version – 24.04-0.6.6.0

Storage Servers version – idfs version 7.2